

Tehničke karakteristike artikla: AR874130--

FID sklopka, 10kA, 40A, 4-polna, struja greške 300mA, B tip

RCCB, Serija Amparo, uređaj kategorije B, standard EN61008, EN




Schrack-Info

- Indikator isklopa (crveno)
- Dvostruke podizno-čeljusne stezaljke, obostrano
- Presjek priključnih stezaljki: 2,5 - 35mm²
- Tip A bez kašnjenja reakcije: VDE certifikat
- Nul-vodič s lijeve strane


Tehnički podaci

Standard	EN 62423 IEC 62423 IEC 61008-1 EN 61008-1
Tip	B (otporna na sve tipove struja)
Izvedba/tip	Bez kašnjenja
Nazivna struja (A)	40
Nazivna diferencijalna struja $I\Delta n$ (mA)	300
Polovi	N+3
Nazivni napon	230/400V AC 4-polig
Nazivna frekvencija (Hz)	50/ 60
Nazivna uklopna kapacitivnost I_m (A)	500
Nazivna prekidna moć	10 kA
Impulsni otporni napon	4kV
Dielektrični kontrolni napon na ind. frekvenciji (V)	2500
Napon izolacije	500 V
Maks. dozvoljeni rezervni osigurač protiv kratkog spoja (A gG)	63
Maks. dozvoljeni rezervni osigurač protiv termičkog preopterećenja	40A: 25A gG
Vreme okidanja bez kašnjenja	$\geq 5 \times I\Delta n$: $\leq 40ms$ $2 \times I\Delta n$: $\leq 150ms$ $I\Delta n$: $\leq 300ms$
Preostala struja bez okidanja	$\leq 0,5 I\Delta n$
Gubitak snage (W)	12,88
Stepen zagađenja	2
Životni vek, električni	2000 Operations
Životni vek, mehanički	10000 radnih ciklusa
Displej	crveno kada se aktivira
IP stepen zaštite	IP20
Presek stezaljke (mm ²)	2,5 - 35
Materijal provodnika	Copper
Obrtni moment	2.5 Nm
Tip stezaljke	Double Mouth Lift Clamp with Back clamps Protection
Ambijentalna temperatura (otvoren) (°C)	-25°C bis +40°C
Način montaže	On DIN rail according to EN 60715 (35mm) via quick mounting clip


Schaltbild

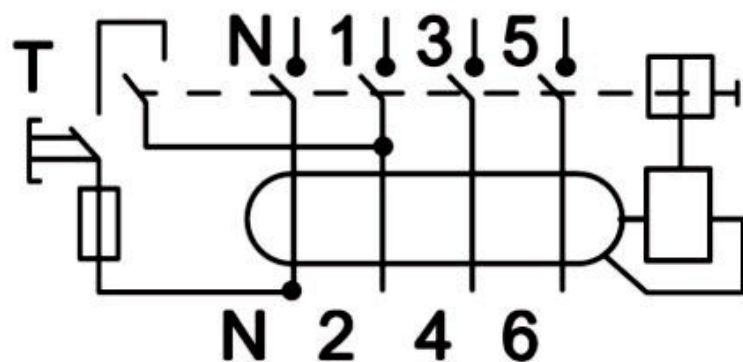

Maßbild

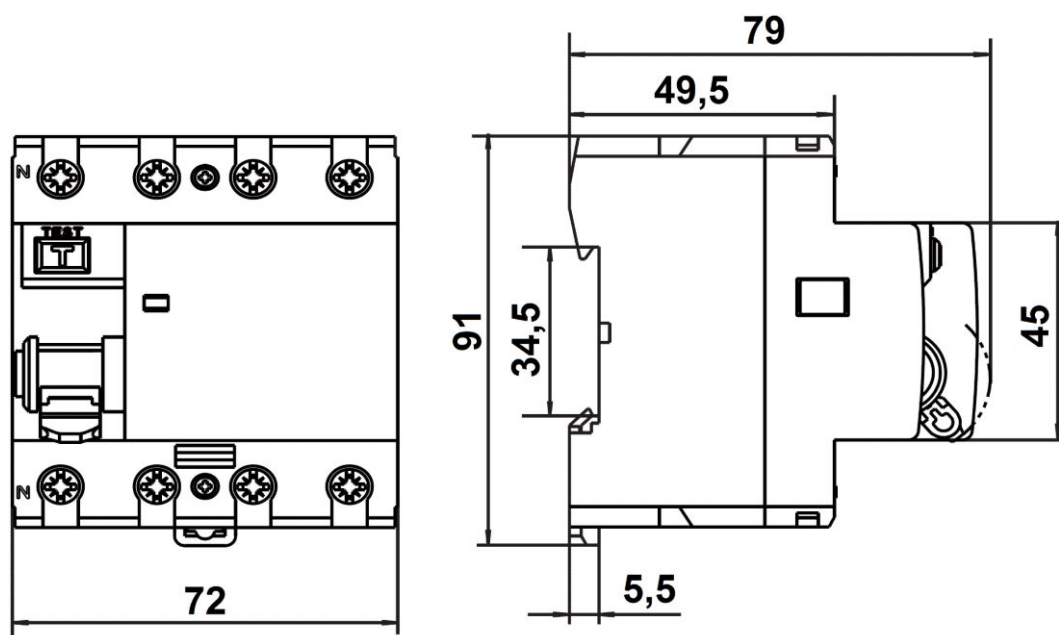

Auslösekennlinie

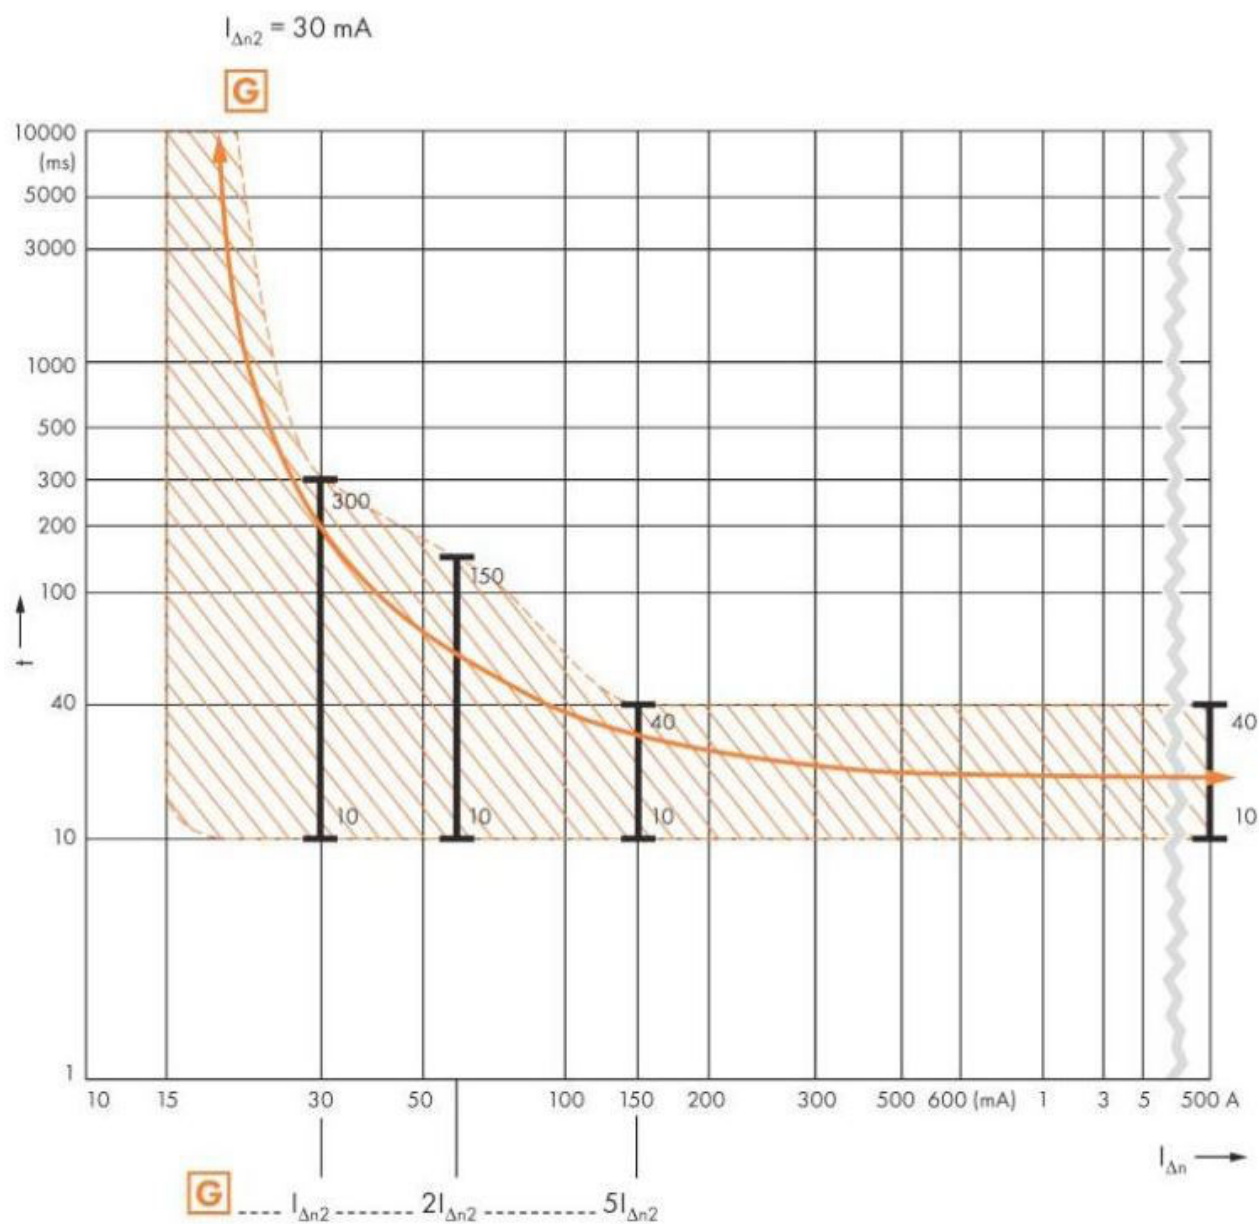

zulässige Klemmung

Cross-section [mm ²]	Number of rigid single wire conductors					
	1	2	3	4	5	6
1	+	+	+	+	-	-
1,5	+	+	+	+	-	-
2,5	+	+	-	+	-	-
4	+	+	+	+	-	-
6	+	+	+	+	-	-

Cross-section [mm ²]	Number of rigid multi wire conductors					
	1	2	3	4	5	6
10	+	+	+	-	-	-
16	+	+	-	-	-	-
25	+	-	-	-	-	-
35	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (without ferrule)					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1,5	+	+	+	+	+	+
2,5	+	+	+	+	-	-
4	+	+	+	-	-	-
6	+	+	-	-	-	-
10	+	+	+	-	-	-
16	+	+	-	-	-	-
25	+	-	-	-	-	-
35	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (with ferrule)					
	1	2	3	4	5	6
1	+	-	-	-	-	-
1,5	+	-	-	-	-	-
2,5	+	-	-	-	-	-
4	+	-	-	-	-	-
6	+	-	-	-	-	-
10	+	-	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-
35	-	-	-	-	-	-

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
FID sklopka, 10kA, 40A, 4-polna, struja greške 300mA, B tip RCCB, Serija Amparo, uređaj kategorije B, standard EN61008, EN		AR874130
Dodatni pribor		
Pomoćni kontakt 1CO, serije AMPARO za RCCB tip B IEC 60947-5-1		AM900003
Sabirnica, 1x B-RCCB N+3, 1x MCB N+3, 16 mm ² , za Amparo, 8m. 60	152	BSA90157
Sabirnica, 1x B-RCCB N+3, 2x MCB N+3, 16 mm ² , za Amparo, 12 m. 60	229	BSA90158
Sabirnica B-RCCB N+3, 1x MCB N+3, 3x MCB N+1/1 modula, Amp. 58	216	BSA90159