


Tehničke karakteristike artikla: IL413539-A

Zählerverteiler Einsatz 5-39E, 5 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

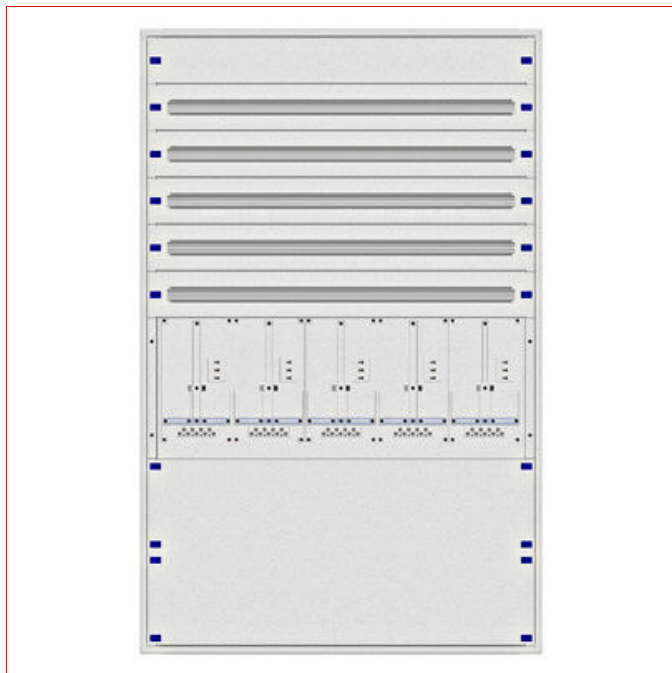

Tehnički podaci

Neto širina (mm)	1.140,00
Neto visina (mm)	1.795,00
Neto dubina (mm)	150,00
EAN	9004840966947
Tip	Umetak za razdjelnik s brojilom
Regija	Tirol
Umeći	Prednje maske metalne
Opis boje	RAL 7035
Širina brojila	5
Visina unit-a	39
Redova brojila	1
Mesta za brojila	5
Downstream redovi	5
Osnovni opis	Umetak

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
Zählerverteiler Einsatz 5-39E, 5 Zählerplätze, Tirol		IL413539-A
Frontblende Stahlblech, komplett		
Dodatni pribor		
Set za uzemljenje 300mm, P/F 6mm ² Ž-Z		IL900099
Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci		
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824