

Tehničke karakteristike artikla: BK050210--

Distributivni orman 4-reda, 72 modula, IP65ž, providna vrata

872x418x148mm (VxŠxD), sadrži N i PE sabirnice, DIN šine podesive po dubini, klasa zaštite II, nazivni napon: 1000V AC/1500V DC, materijal ABS, halogen free, ispitivanje na žarnu nit: 650°C, UV postojan prema ISO 4892-2, kabelski ulazi na vrhu: 12xM20, 6xM25, 2xM32, 1xM40, na dnu: 12xM20, 6xM25, 2xM32, 1xM40, bočno: 4xM25



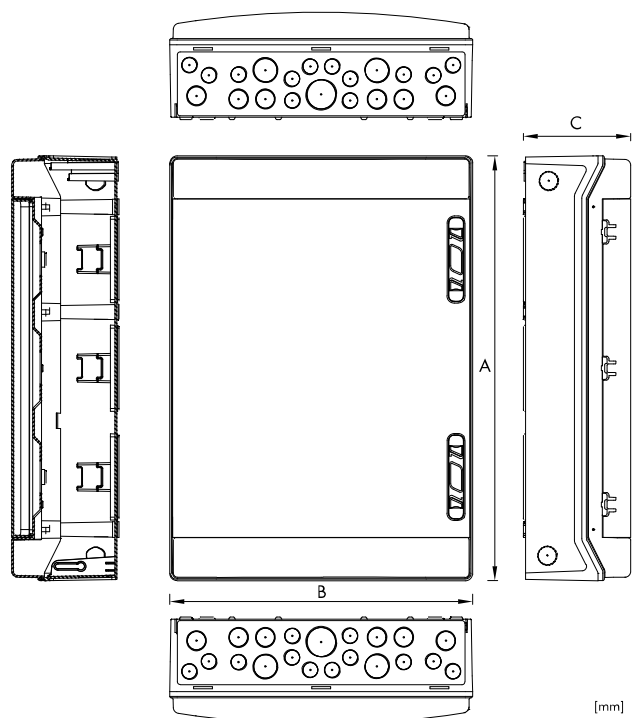
SCHRACK-Info

- Wall-mounted enclosures with transparent door inclusive UV-Protection
- Lock: Pressure-operated mechanism, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen-free plastic materials
- UV stability and weather resistant
- Rated voltage 1000VAC, 1500VDC
- Ambient temperature: -25° to +40°C
- Glow wire test: 650°C
- Material: ABS
- Degree of protection IP65
- Resistance to impact: IK08
- RAL7035 light grey



Tehnički podaci

Neto širina (mm)	418,00
Neto visina (mm)	872,00
Neto dubina (mm)	148,00
Neto težina (kg)	7,10
EAN	9007985018861
Gubitak snage (W)	-110,00
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	60
Redovi	4

Dimenzija: Distributivni orman 4-reda, 72 modula, IP65ž, providna vrata

AP-Wohnungsverteiler Serie BK050xx, IP65, transparente Tür

Artikelnummer	A [mm]	B [mm]	C [mm]	Reihen	TE	Verlust- leistung [W]*
BK050200	231	166	113	1	4	-10
BK050201	231	238	118	1	8	-23
BK050202	246	310	148	1	12	-33
BK050203	436	310	148	2	24	-52
BK050204	586	310	148	3	36	-67
BK050205	436	418	148	2	36	-64
BK050206	286	418	148	1	18	-46
BK050207	231	202	113	1	6	-20
BK050208	586	418	148	3	54	-82
BK050209	870	310	148	4	48	-95
BK050210	872	418	148	4	72	-110

*max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite 9

Tabela artikla

OPIS	Kat. broj
Distributivni orman 4-reda, 72 modula, IP65ž, providna vrata 872x418x148mm (VxŠxD), sadrži N i PE sabirnice, DIN šine podesive po dubini, klasa zaštite II, nazivni napon: 1000V AC/ 1500V DC, materijal ABS, halogen free, ispitivanje na žarnu nit: 650°C, UV postojan prema ISO 4892-2, kabelski ulazi na vrhu: 12xM20, 6xM25, 2xM32, 1xM40, na dnu: 12xM20, 6xM25, 2xM32, 1xM40, bočno: 4xM25	BK050210
Dodatni pribor	
Polucilindar brava za BK spratne table, IP65	BK050097
Kabl.spojnicica za M25x1.5 za povezivanje sp.tabli tipa BK Za povezivanje razdjelnika serije BK05	BK050098
Kabl.spojnicica za M40x1.5 za povezivanje sp.tabli tipa BK Za povezivanje razdjelnika serije BK05	BK050099