

Tehničke karakteristike artikla: BSB00060--

Sabirnica 1xRCCB 4-polna, 4xSPD, 8M (MW=18mm), 16mm²

Sabirnica viljuškasta 1xRCCB 4-polna, 4xSPD, 8M (MW=18mm), 16mm²

Schrack-Info

- Compact-Busbar for wiring of devices with: Dual-function terminal, screw terminal, screw connection, bracket terminal, flat terminal
- Division unit 17.8mm
- 8 MW
- Phase sequence: L1, L2, L3, N, L1, L2, L3, N (other applications possible)
- No end caps required


Tehnički podaci

Prečnik (mm ²)	10
Standard proizvoda	EN 61439-1
Maks. početak struje	80A
Maks. trenutna sredina	130A
Materijal	E-Cu-ETP
Materijal izolacije	PC
Bezhalogeni	Prema DIN EN 50267-2-2
Temperaturni okvir - Operativni (°C)	do 125
Jačina svetleće žice (°C)	960


Tehnički podaci - nastavak

Kategorija prenapona	3
Nazivni udarni podnosivi napon [Uimp] (V)	4k
Nazivni napon	400V-AC
Nazivna prekidna moć	100Agl / 25 kA
Dielektrična snaga	36kV/mm
Stepen zagađenja	2
Klimatska zaštita	IEC 68-2
Klasa zapaljivosti	2
Otpor praćenju	CTI 600
Gubitak snage (W)	3,00

Dimensions in mm

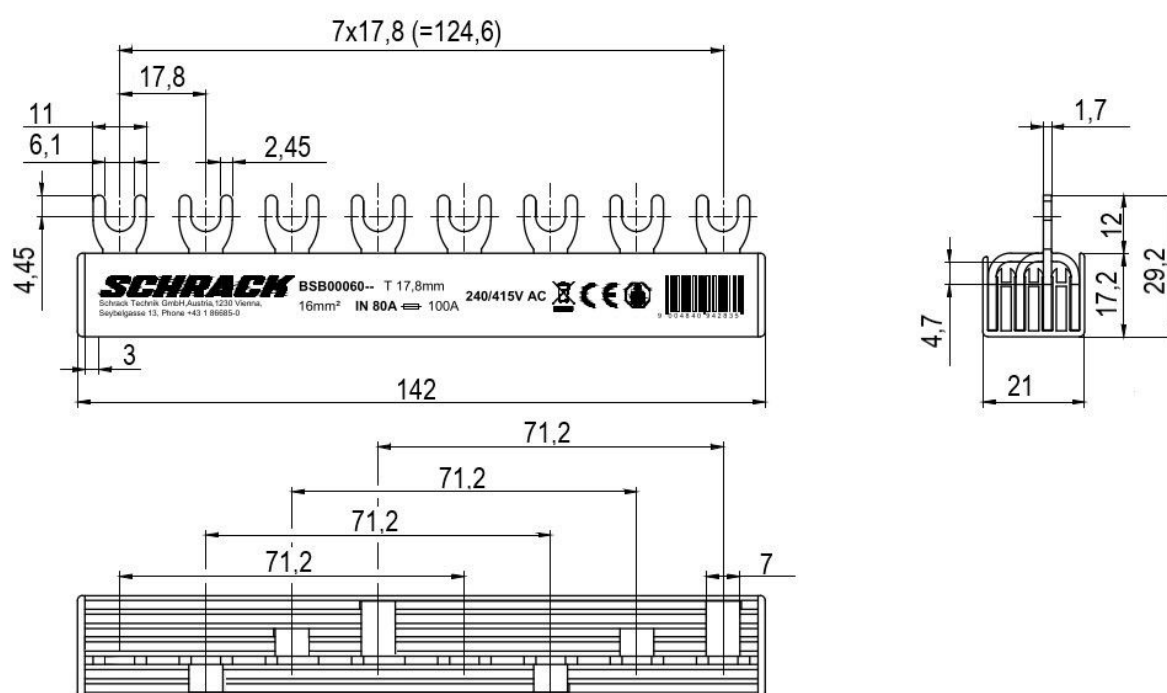

Feeding at beginning or end of busbar

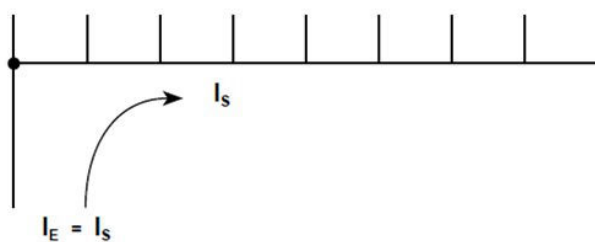

Other feedings

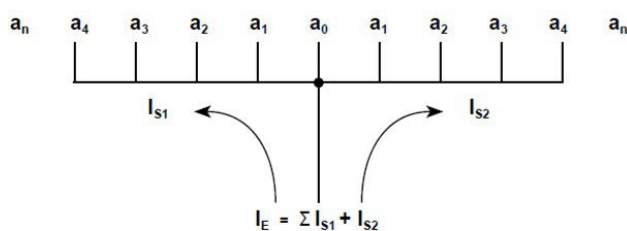


Tabela artikla

OPIS	Kat. broj
Sabirnica 1xRCCB 4-polna, 4xSPD, 8M (MW=18mm), 16mm ²	BSB00060
Sabirnica viljuškasta 1xRCCB 4-polna, 4xSPD, 8M (MW=18mm), 16mm ²	
Dodatni pribor	
Zaštita od kontakta žuta	BSB00303
Poklopac za rezervni prostor na sabirnici	