

Tehničke karakteristike artikla: DTWH096045

# 19" Nazidni orman 9HU/ 512x600x450 (VxŠxD), 80kg, IP20, crni

RAL9005 (crna), staklena vrata, IP20



## SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
  - Top and bottom chassis: 0.6mm
  - Corner profile: 1.1mm
  - Rails: 1.4mm
  - Front door: 0,6mm
  - Rear panel: 0.5mm
  - Side panel: 0.5mm
- **Colors:**
  - RAL9005 Black
  - Strips: RAL5005 Signal blue
- **Height:** 9U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
  - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
  - Passive cooling through ventilation slots and heat exchange with the outside area.
  - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


## Tehnički podaci

|                                |                 |
|--------------------------------|-----------------|
| Neto širina (mm)               | 600,00          |
| Neto visina (mm)               | 512,00          |
| Neto dubina (mm)               | 450,00          |
| Neto težina (kg)               | 13,50           |
| EAN                            | 9004840990898   |
| Min. temperatura okoline (°C)  | 5               |
| Maks. temperatura okoline (°C) | 40              |
| Visina unit-a                  | 9               |
| Opis boje                      | RAL 9005 (crna) |
| IP stepen zaštite              | IP20            |
| Maksimalno opterećenje (kg)    | 80              |
| Serijski                       | S-RACK          |


**Dimenzija: 19" Nazidni orman 9HU/512x600x450 (VxŠxD), 80kg, IP20, crni**

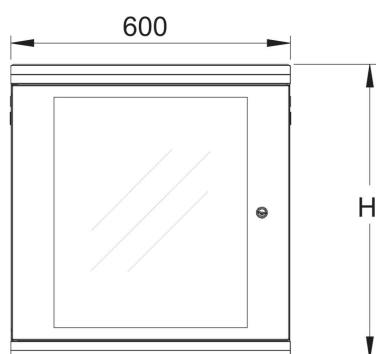


Front view

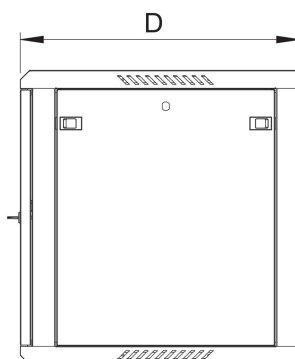


Side view




Bottom view




Top view

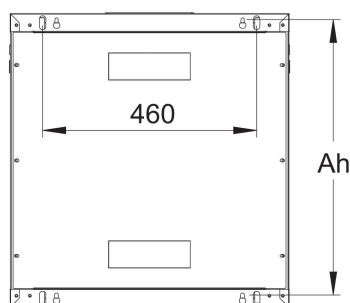


Rear view



Front inside view


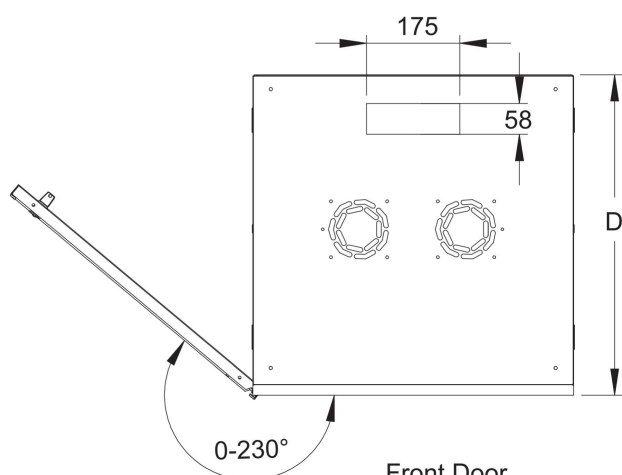


Front Door  
Opening Angle

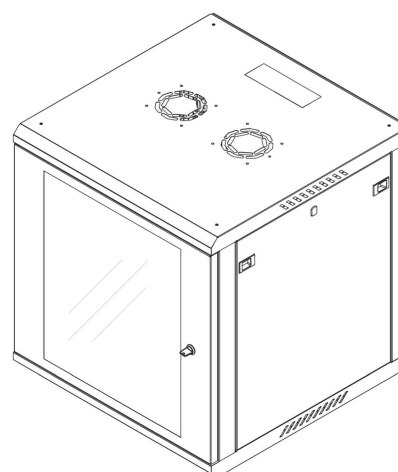

Isometric view


## Dimenzija: 19" Nazidni orman 9HU/512x600x450 (VxŠxD), 80kg, IP20, crni

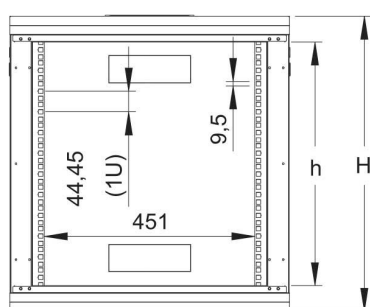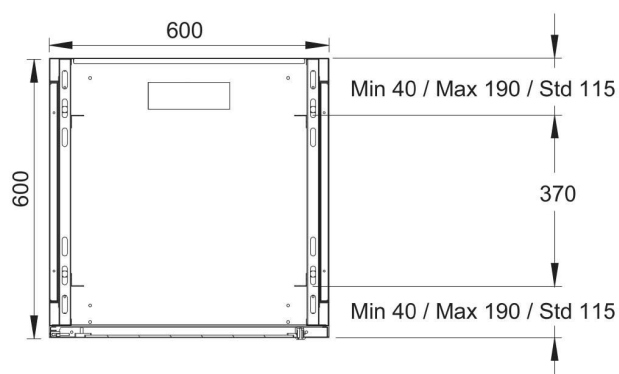

Dimensions in  
Width and Height

| U<br>Height | Size D  | h   | H   | Ah  |
|-------------|---------|-----|-----|-----|
| 4U          | 450/600 | 178 | 290 | 251 |
| 6U          | 450/600 | 267 | 379 | 340 |
| 9U          | 450/600 | 400 | 512 | 473 |
| 12U         | 450/600 | 533 | 645 | 606 |
| 15U         | 450/600 | 667 | 779 | 740 |
| 18U         | 450/600 | 800 | 912 | 873 |

**Dimenzija: 19" Nazidni orman 9HU/512x600x450 (VxŠxD), 80kg, IP20, crni**

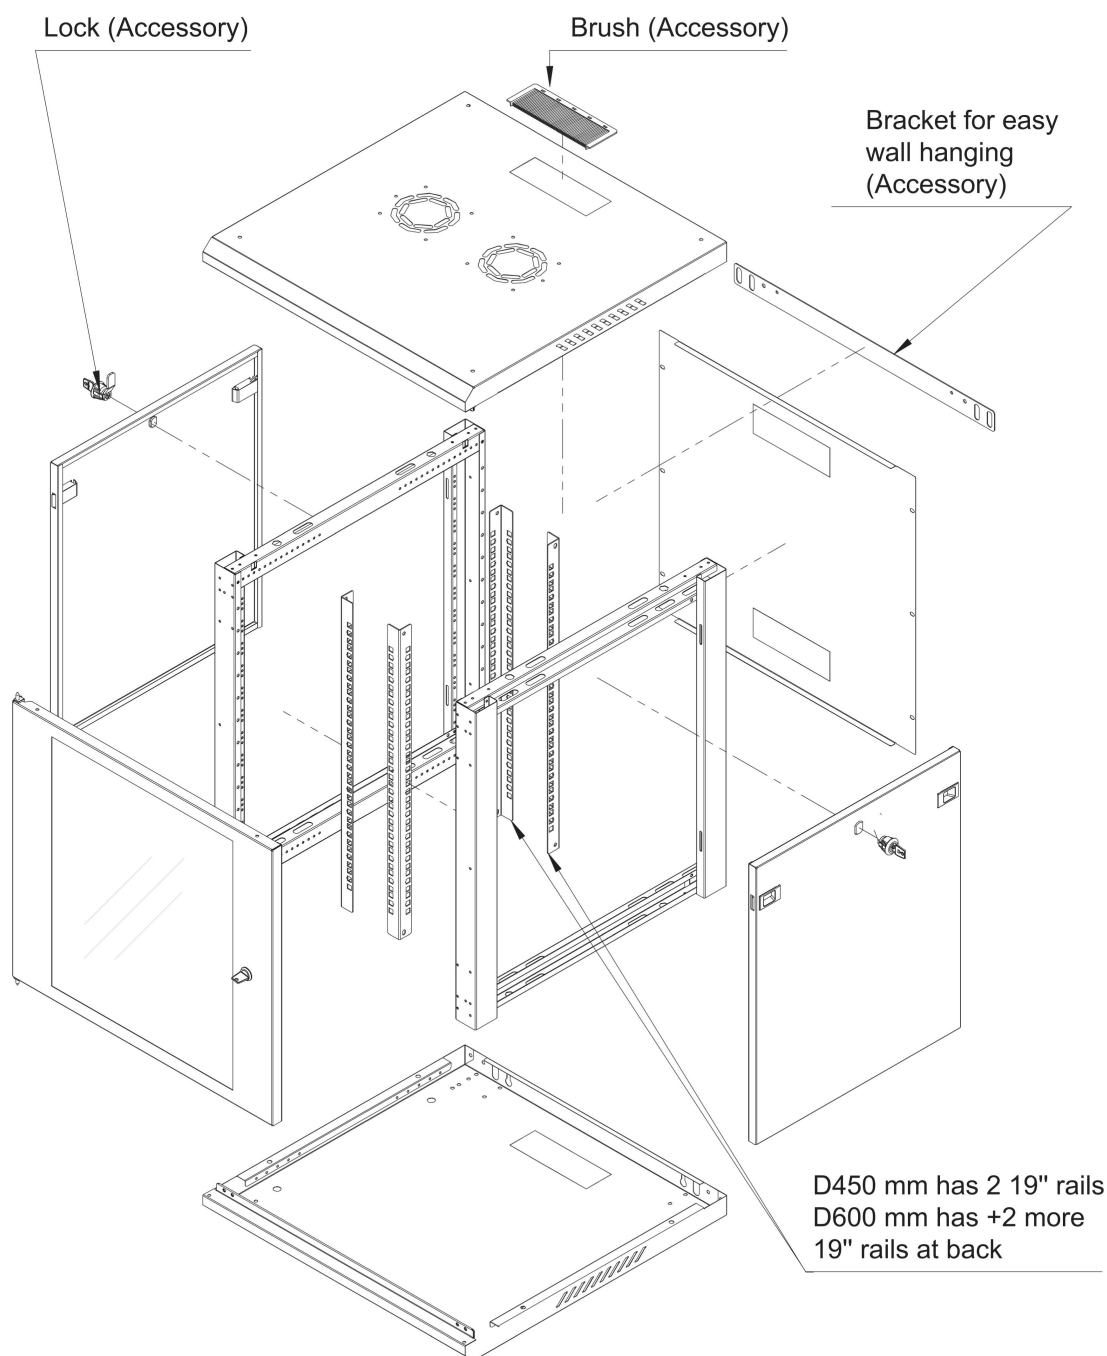

OPIS

19" Nazidni orman 9HU/512x600x450 (VxŠxD), 80kg, IP20, crni  
RAL9005 (crna), staklena vrata, IP20

Kat. broj

DTWH096045

## Tabela artikla

| OPIS                                                                                                                       | Kat. broj  |
|----------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Dodatni pribor</b>                                                                                                      |            |
| <b>Dodatni pribor</b>                                                                                                      |            |
| Krovni panel sa 2 vent. i analog.termostat. za DT/DTW,crni<br>RAL9005 (crna), montaža izvan kućišta ormara                 | DTLRO2A-B  |
| Krovni panel sa 1 vent. i analog.termostat. za DT/DTW,crni<br>RAL9005 (crna), montaža izvan kućišta ormara                 | DTLRO1A-B  |
| Noseća 19" šina 9HU,za nazidne ormara DTWG/DTWH (par)<br>1 SET=2 komada, pocinkovana/galvanizovana                         | DTWGPROF09 |
| 19"Polica fiksna,dubine 300mm, 1HU,nosivosti 30kg,crna<br>RAL9005 (crna), montaža u 2 tačke                                | DTFT1300-B |
| Set točkova (2 sa kočnicom,2 bez kočnice) za ormara DTWG/H<br>1 SET= 4 komada                                              | DTZR0006   |
| Bravica (standardna) i ključ za bočne panele DTWG/DTWH,set<br>1 SET= 2 komada, za boč. panele, sa ključevima, rezervni deo | DTZLOCK06  |
| Nosač za nazidno postavljanje ormara DTWG/DTWH,crni<br>RAL90055 (svetlo siva)                                              | DTZBRACK-B |
| Četka za uvod kabla (podni i krovni) za ormar DTW,60x176mm<br>S-RACK                                                       | DTZBRUSH04 |
| 19"Patch panel 24xRJ45 (SFA,SFB), 1HU,prazan,crni<br>fiksni zadnji nosač kabla, RAL9005 (crna)                             | HSER0240SP |
| 19"Ranžirni panel,5 metalnih prstenova 80x40mm, 1U,crni<br>metalni prstenovi, RAL9005 (crna)                               | DTBC105R-B |
| Set za montažu 19" opreme,M6 vijak i kavez matica (20 kom)<br>M6 vijak i kavez matica                                      | DTSRA020   |
| Switch 24xRJ45 10/100/1000, tihi, bez ventilatora, interni<br>Metalno kućište, 19"                                         | QLGSW2457  |
| 19"Nap.panel 9xSCHUKO, 1HU,ALU,kabl 2m,sivi<br>RAL7035 (svetlo siva)                                                       | IU070114   |
| 19"Nap.panel 7xSCHUKO+PNZ, 1.25HU,PVC,kabl 2m,sivi<br>sa prenaponskom zaštitom T3 (klasa D), RAL7035 (svetlo siva)         | IU070113   |
| 19"Nap.panel 9xSCHUKO+On/Off, 1HU,ALU,kabl 2m,crni<br>sa On/Off prekidačem, RAL9005 (crna)                                 | Q7070114-A |
| 19"Nap.panel 7xSCHUKO+On/Off+PNZ, 1HU,ALU,kabl 2m,crni<br>sa prenaponskom zaštitom T3 (klasa D), RAL9005 (crna)            | Q7070113-A |