

Tehničke karakteristike artikla: DTW1206067

19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600 (VxŠxD), 100kg, sivi

RAL7035 (svetlo siva), metalna vrata, IP55



SCHRACK info

Network wallmount 19" IP55 Outdoor Cabinets are designed for industrial applications.

Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application: Outdoor areas under environment influences.

Protection of the installed equipment against ingress of solid foreign objects (falling dirt and windblown dust) and against the ingress of water (rain, sleet, snow, splashing water).

Gasketed doors IP55

3 point locking system with swing handle. Isolated cable entries.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides corrosion resistance.

Passive ventilation via filtered inlets.

Option to install fans for active ventilation.

Outdoor cabinets have a fan cover in the top view and side filter cover to comply with protection class IP55.

TEHNIČKI PODACI

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.


- Height: 20U
- Širina: 600mm
- Dubina: 600mm
- Maximum Load: 100kg
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection.
- Included are 4 pcs, 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2 x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails




Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	1.068,00
Neto dubina (mm)	600,00
Neto težina (kg)	58,00
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Pogodno za širinu ormara (mm)	600
Visina (mm)	1068
Opis boje	RAL 7035 (svetlo siva)
Osnovni opis	Kućište


Dimenzija: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi



Top view

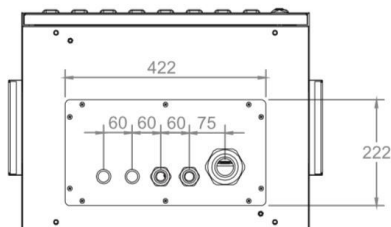


Bottom view

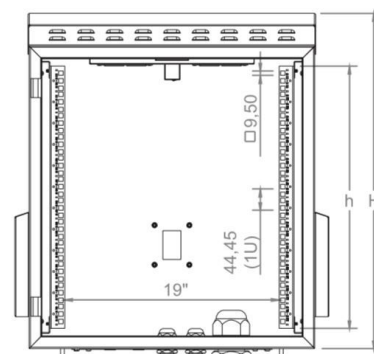


Inside view


Dimenzija: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi

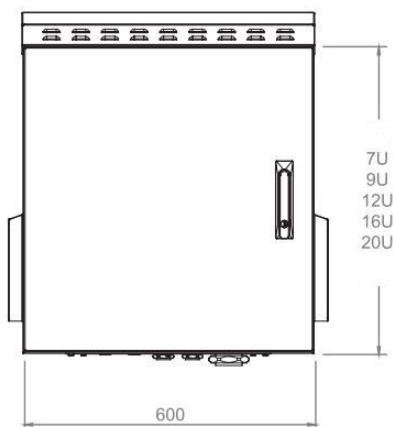

Front view

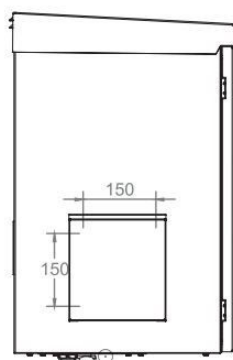


Side view

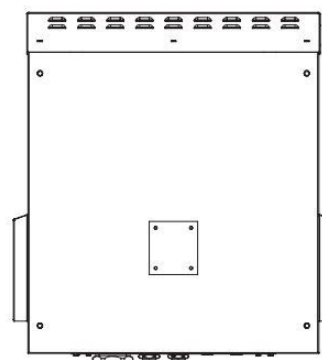


Rear view

**Dimenzija: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi**

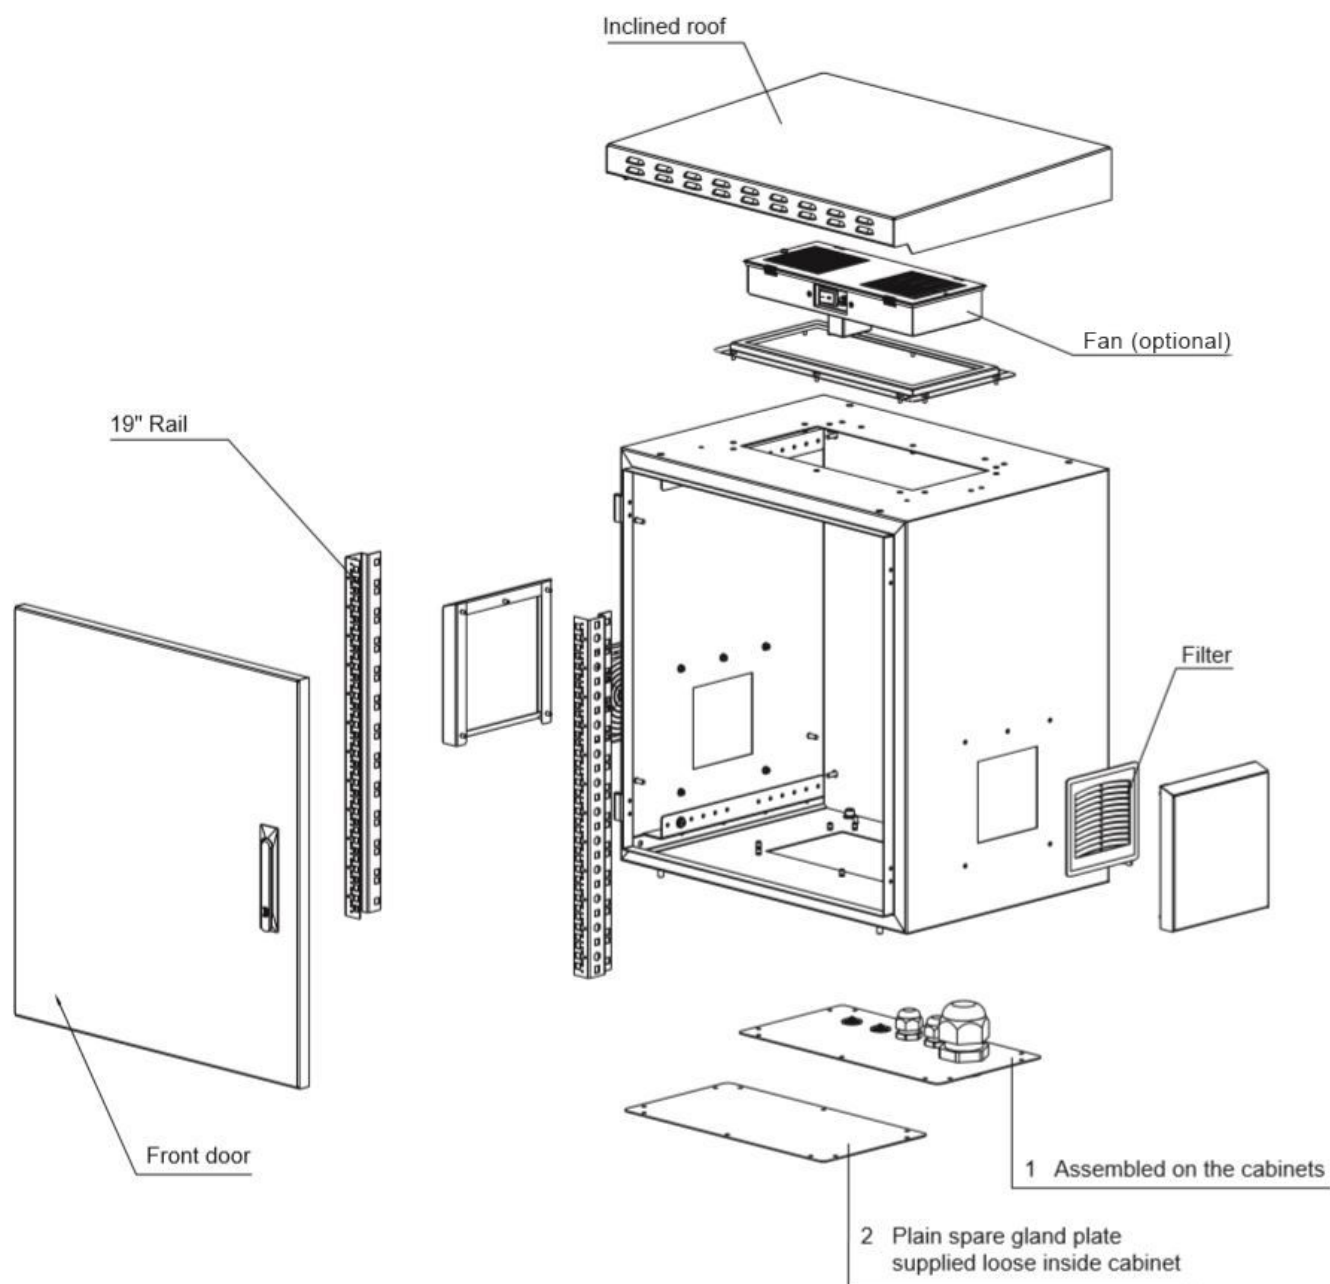

**Dimenzija: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi**

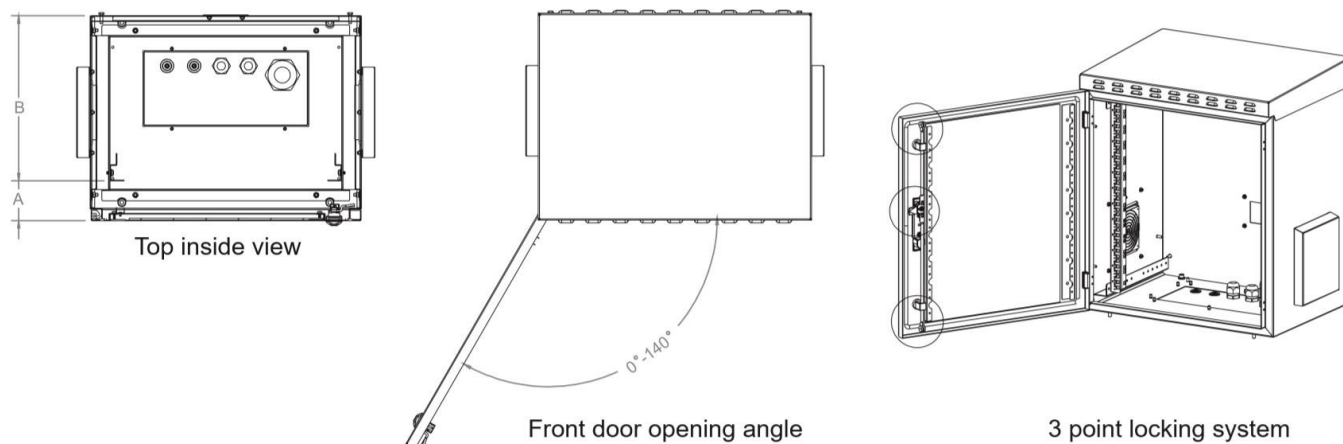

**Dimenzija: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi**

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

**Lista fajlova: 19" Naz. orm. IP55 20HU OUTDOOR/ 1068x600x600
(VxŠxD), 100kg, sivi**

Tip	h [mm]	H [mm]	neto masa [kg]	bruto masa [kg]
DTWI206067	889	1068	58	59,5

Tabela artikla

OPIS	Kat. broj
19" Naz. orm. IP55 20HU OUTDOOR/1068x600x600 (VxŠxD), 100kg, sivi RAL7035 (svetlo siva), metalna vrata, IP55	DTWI206067
Dodatni pribor	
Krov. vent. sa 1 ventilatorom i prekidačem, IP54, za DTWI, sivi RAL7035, montaža izvan ormara, IP54, za ormane DTWI (IP55)	DTLTR5521
Krov. vent. sa 2 ventilatora i prekidačem, IP54, za DTWI, sivi RAL7035, montaža izvan ormara, IP54, za ormane DTWI (IP55)	DTLTR5522
Noseća 19" šina 20HU, za nazidne ormane DTWI (par) 1 SET=2 komada, pocinkovana/galvanizovana	DTWIPROF20
Podnožje ormara DTWI (IP55), 600x600mm (ŠxD), visine 100mm, sivo RAL7035 (sv. siva), visina 100mm (nema mogućnost nadgradnje)	DTOTI10606
Set za montažu ormara DTWI na stub prečnika 110-150mm 1 SET=2 komada (nosača), pocinkovan/galvanizovani	DTWIPAK
Adapter zakretne ručice za polucilindar ormara DT za polucilindar	DTZLOCK02
Adapter zakretne ručice za polucilindar ormara DTWI za polucilindar, potrebno dodati DTZLOCK02	DTZLOCK05