



Tehničke karakteristike artikla: DW125540--

19" Nazid.orm.FLATPACK 12U/ 590x550x400(VxŠxD), 35kg, IP20, sivi

RAL7035 (sv.siva), staklena vrata, IP20, potpuno rasklopiv



SCHRACK info

TEHNIČKI PODACI

- Čelični lim
- Visine: 4, 6, 9 i 12U
- Širina: 550mm
- Dubina: 400mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: 130°
- 19"- rails (2 pcs.) galvanized. Step-adjustable in the front cabinet part.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (1x). Covered with „break-out style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Passive cooling by sharing heat with environment via chassis
- space between front vertical 19"-rail and door glass at max. spacing: W550 – 35mm
- Earthing:
M8-Earthing point in the rear of the cabinet
Earthing cables for connection to all dismountable parts included in delivery.
- Wide range available accessories (fans, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.)
- Units of measurement: Inch: 1" = 25,4mm, Unit (Height Unit): 1U = 1,75" = 44,45mm


Tehnički podaci

Neto širina (mm)	550,00
Neto visina (mm)	580,00
Neto dubina (mm)	400,00
Neto težina (kg)	18,40
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Prikladno za visinu unit-a	12U-580mm
Proizvod	Data-Enclosures Wallmounting Flatpack IP20
Opis boje	RAL 7035 (svetlo siva)
Krovni ventilator, opcija	ne
Osnovni opis	Kućiste

**Lista fajlova: 19"Nazid.orm.FLATPACK 12U/
590x550x400(VxŠxD), 35kg, IP20, sivi**

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW045540--	230	180	505	550	400	180	435	11,4	11,2	35
DW065540--	320	270	505	550	400	270	435	13,6	13,3	
DW095540--	463	412	505	550	400	412	435	17,4	17,1	
DW125540--	590	530	505	550	400	530	435	19,7	19,4	

**Dimenzija: 19"Nazid.orm.FLATPACK 12U/
590x550x400(VxŠxD), 35kg, IP20, sivi**

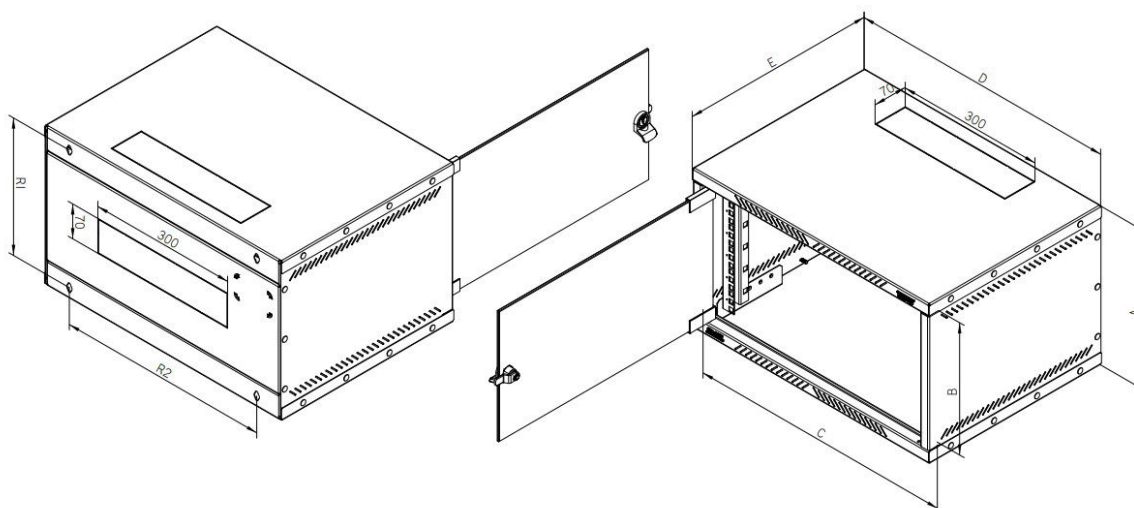

Schnittansicht der vertikalen 19"-Profilschienen

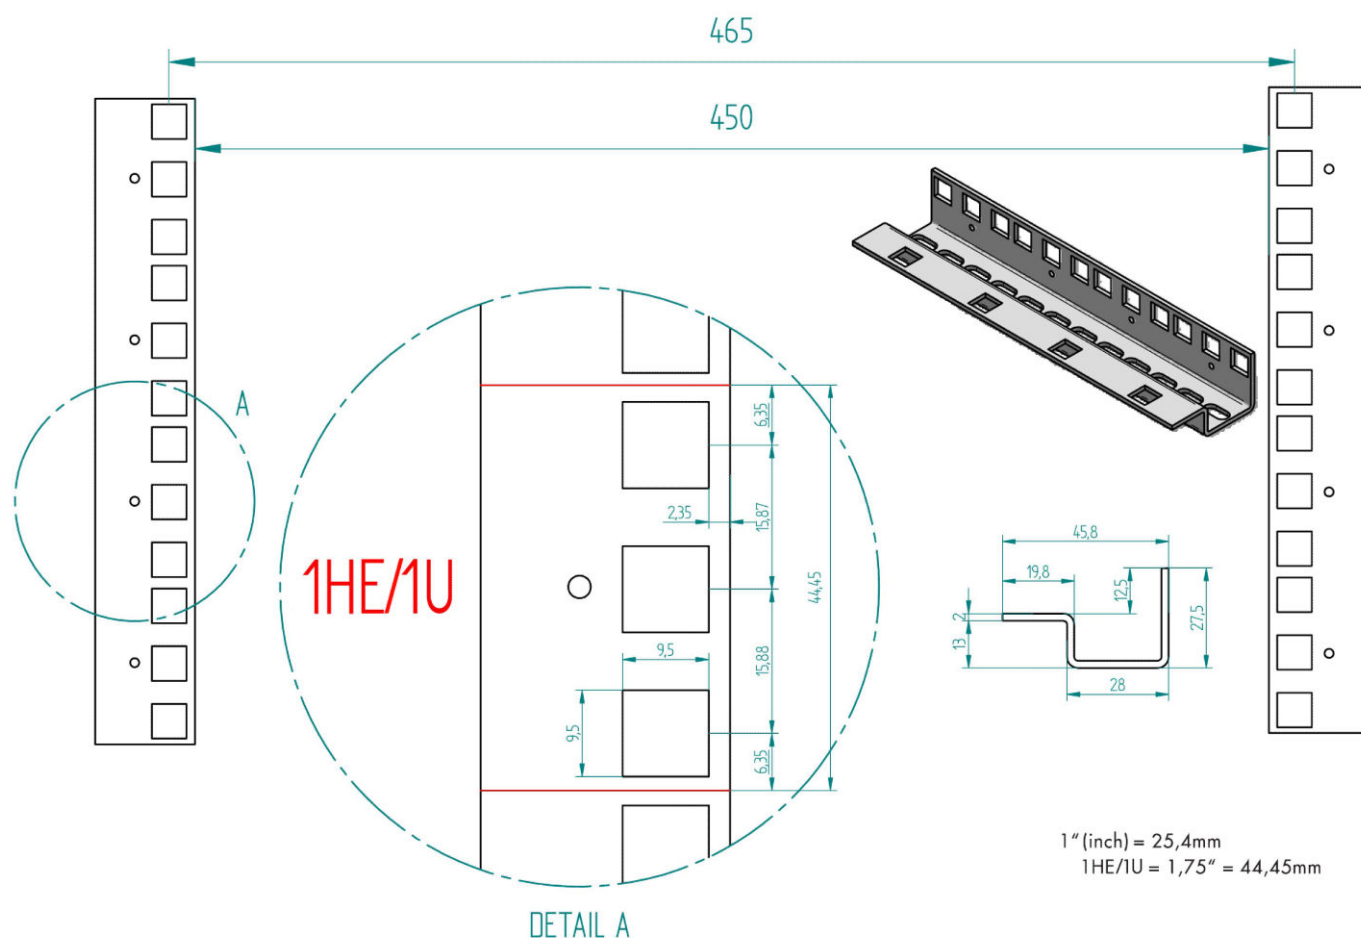


Tabela artikla

OPIS	Kat. broj
19"Nazid.orm.FLATPACK 12U/590x550x400(VxŠxD), 35kg, IP20, sivi	DW125540
RAL7035 (sv.siva), staklena vrata, IP20, potpuno rasklopiv	
Dodatni pribor	
19"Polica fiksna, dubine 350mm, 1HU, nosivosti 50kg, siva	DFS14835-C
RAL7035 (svetlo siva), montaža u 4 tačke	
Set za fiksiranje 19" opreme, M6 (vijak+kavez matica), 50kom	DSSRA050
1 SET=50 komada	
19"LED svetiljka sa prekidačem i senzorom pokreta, 230VAC	DTLIGHT01
montaža na 19" šinu (vijkom) ili pomoću magneta	
Switch 24xRJ45 10/100/1000, tihi, bez ventilatora, interni	QLGSW2457
Metalno kućište, 19"	

Tabela artikla

OPIS	Kat. broj
Dodatni pribor	
19"Patch panel 24xRJ45 (SFA,SFB), 1HU,prazan,sivi demontažni zadnji nosač kabla, RAL7035 (svetlo siva)	HSER0240GS
19"Nap.panel 9xSCHUKO, 1HU,ALU,kabl 2m,sivi RAL7035 (svetlo siva)	IU070114
19"Nap.panel 7xSCHUKO+PNZ, 1.25HU,PVC,kabl 2m,sivi sa prenaponskom zaštitom T3 (klasa D), RAL7035 (svetlo siva)	IU070113
19"Nap.panel 9xSCHUKO+On/Off, 1HU,ALU,kabl 2m,crni sa On/Off prekidačem, RAL9005 (crna)	Q7070114-A
19"Nap.panel 7xSCHUKO+On/Off+PNZ, 1HU,ALU,kabl 2m,crni sa prenaponskom zaštitom T3 (klasa D), RAL9005 (crna)	Q7070113-A