


Tehničke karakteristike artikla: DW21605D--

19" Nazidni orman DUAL, trodelni, 21HU 1035/600/515(VxŠxD)



SCHRACK info

TEHNIČKI PODACI

- Čelični lim
- Raspoložive visine: 4, 6, 9, 12, 15, 18 and 21 U
- Širina: 600mm, Dubina: 515/615mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

Tehnički podaci


Neto širina (mm)	600,00
Neto visina (mm)	1.085,00
Neto dubina (mm)	515,00
Neto težina (kg)	34,50
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Prikladno za visinu unit-a	21U-1035mm

Tehnički podaci - nastavak

Proizvod	Data-Enclosures Wallmounting Dualbloc IP20
Krovni ventilator, opcija	ne
Osnovni opis	Kućište

Lista fajlova: 19" Nazidni orman DUAL, trodelni, 21HU 1035/600/515(VxŠxD)

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW06605D--	370	265	516	600	515	324	420	17,3	16,9	20
DW09605D--	500	395	516	600	515	454	420	20,5	20,1	25
DW12605D--	635	530	516	600	515	589	420	23,9	23,5	25
DW15605D--	770	665	516	600	515	724	420	27,4	27	30
DW18605D--	900	795	516	600	515	854	420	30,5	30,1	30
DW21605D--	1035	930	516	600	515	989	420	35,58	35,11	35

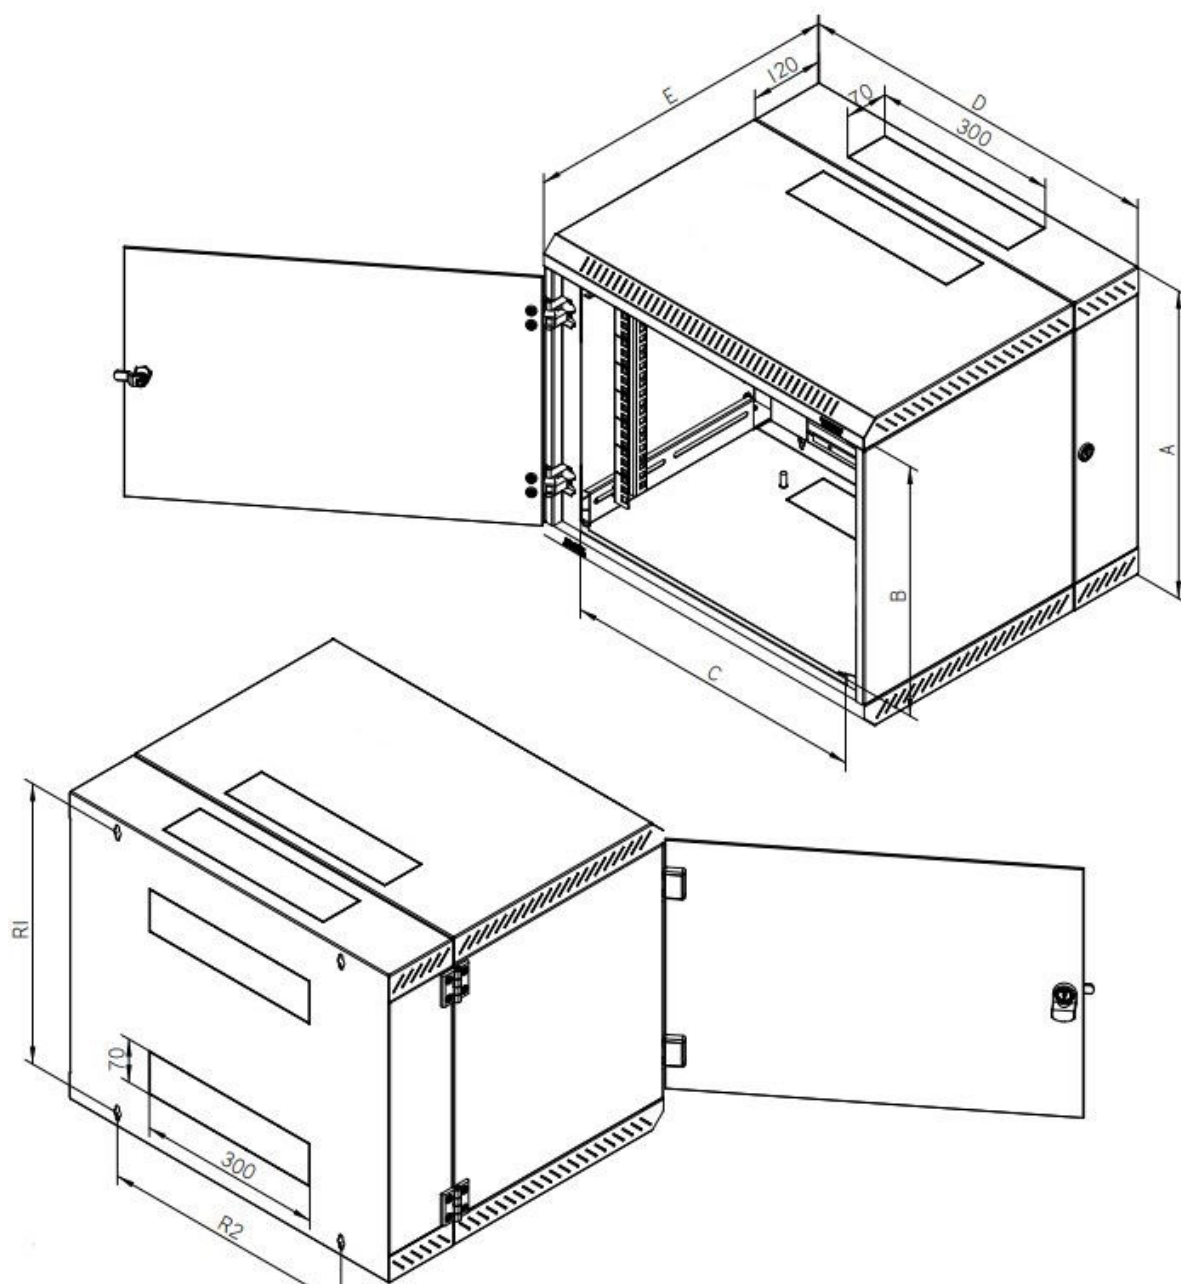Dimenzija: 19" Nazidni orman DUAL, trodelni, 21HU 1035/600/515(VxŠxD)

Schnittansicht der vertikalen 19"-Profilschienen

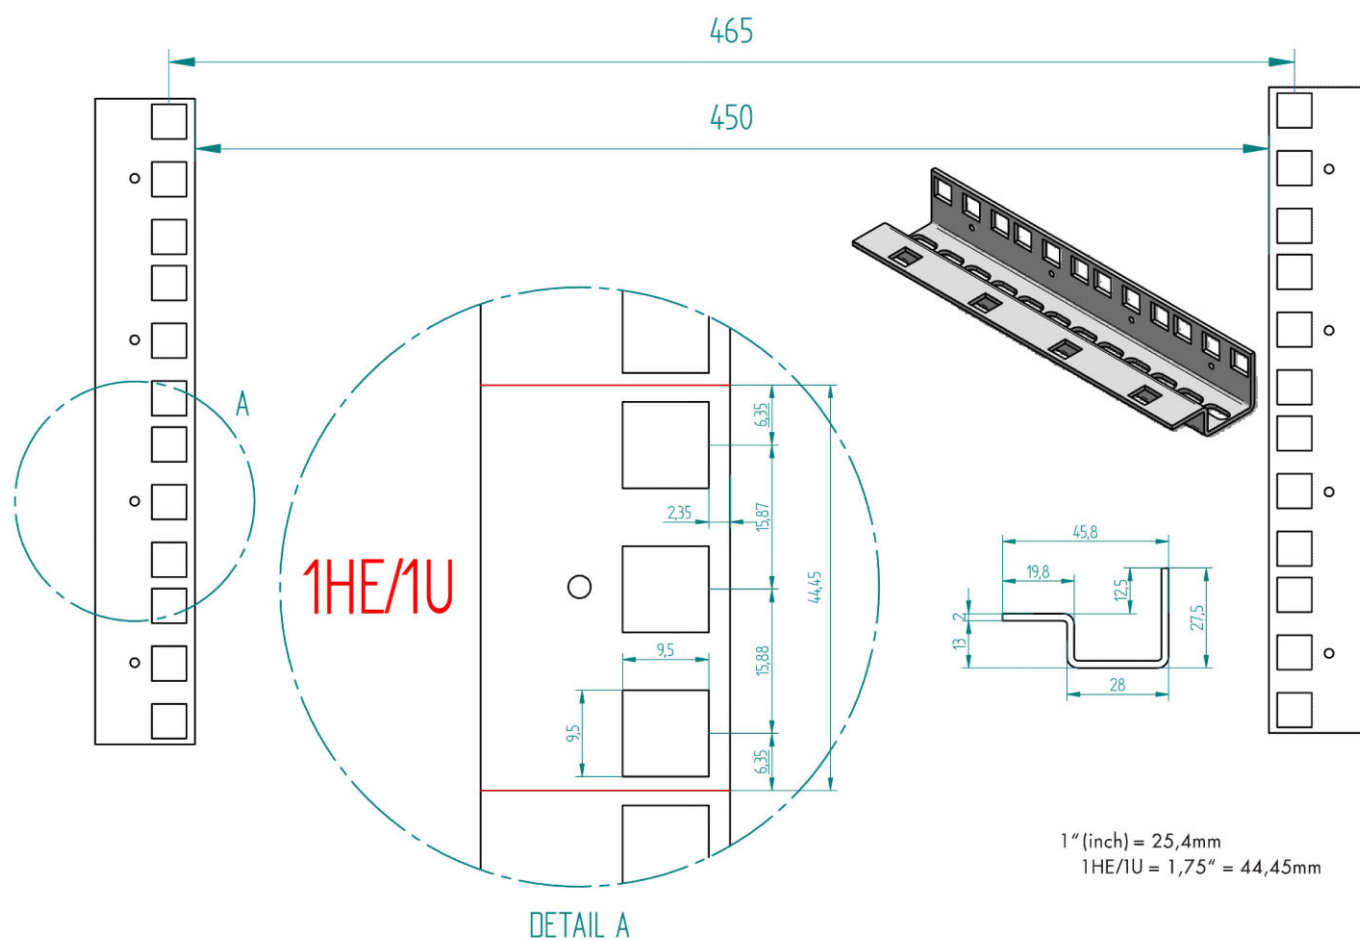


Tabela artikla

OPIS	Kat. broj
19" Nazidni orman DUAL, trodelni, 21 HU 1035/600/515 (VxŠxD)	DW21605D
Dodatni pribor	
19" Fiksna polica dubine 350mm, 1 HU, 50kg max, perforirana	DFS14835-C
19" Set za fiksiranje opreme M6 (vijak+kavez matica), 50 kom	DSSRA050
19" LED svetiljka, 700lm, montaža magnetom ili vijkom	DV900336-A
19" Napojni panel-9xSCHUKO, ALU, 1 HU	IU070114
19" Napojni panel-8xSCHUKO i prekidač, ALU, 1 HU	IU070124
kabl sa utikačem 2m, RAL7035	
19" Vrata za DW orman, 21 HU, širine 600mm, staklena, polucili	DWRT2167
Vorbereitung	
19" Set nosača za police, za DW ormane	DFSZDW01
Switch 24xRJ45 10/100/1000, tihi, bez ventilatora, interni	QLGSW2457
Metalno kućište, 19"	