


Tehničke karakteristike artikla: DW21606D--

19" Nazidni orman DUAL, trodelni, 21HU 1035/600/615(VxŠxD)



SCHRACK info

TEHNIČKI PODACI

- Čelični lim
- Raspoložive visine: 4, 6, 9, 12, 15, 18 and 21 U
- Širina: 600mm, Dubina: 515/615mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

Tehnički podaci


Neto širina (mm)	600,00
Neto visina (mm)	1.035,00
Neto dubina (mm)	615,00
Neto težina (kg)	38,10
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Prikladno za visinu unit-a	21U-1035mm

Tehnički podaci - nastavak

Proizvod	Data-Enclosures Wallmounting Dualbloc IP20
Krovni ventilator, opcija	ne
Osnovni opis	Kućište

Lista fajlova: 19" Nazidni orman DUAL, trodelni, 21HU 1035/600/615(VxŠxD)

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW18606D--	900	795	516	600	615	854	420	33,6	33,2	30
DW21606D--	1035	930	516	600	615	989	420	39,2	38,73	35

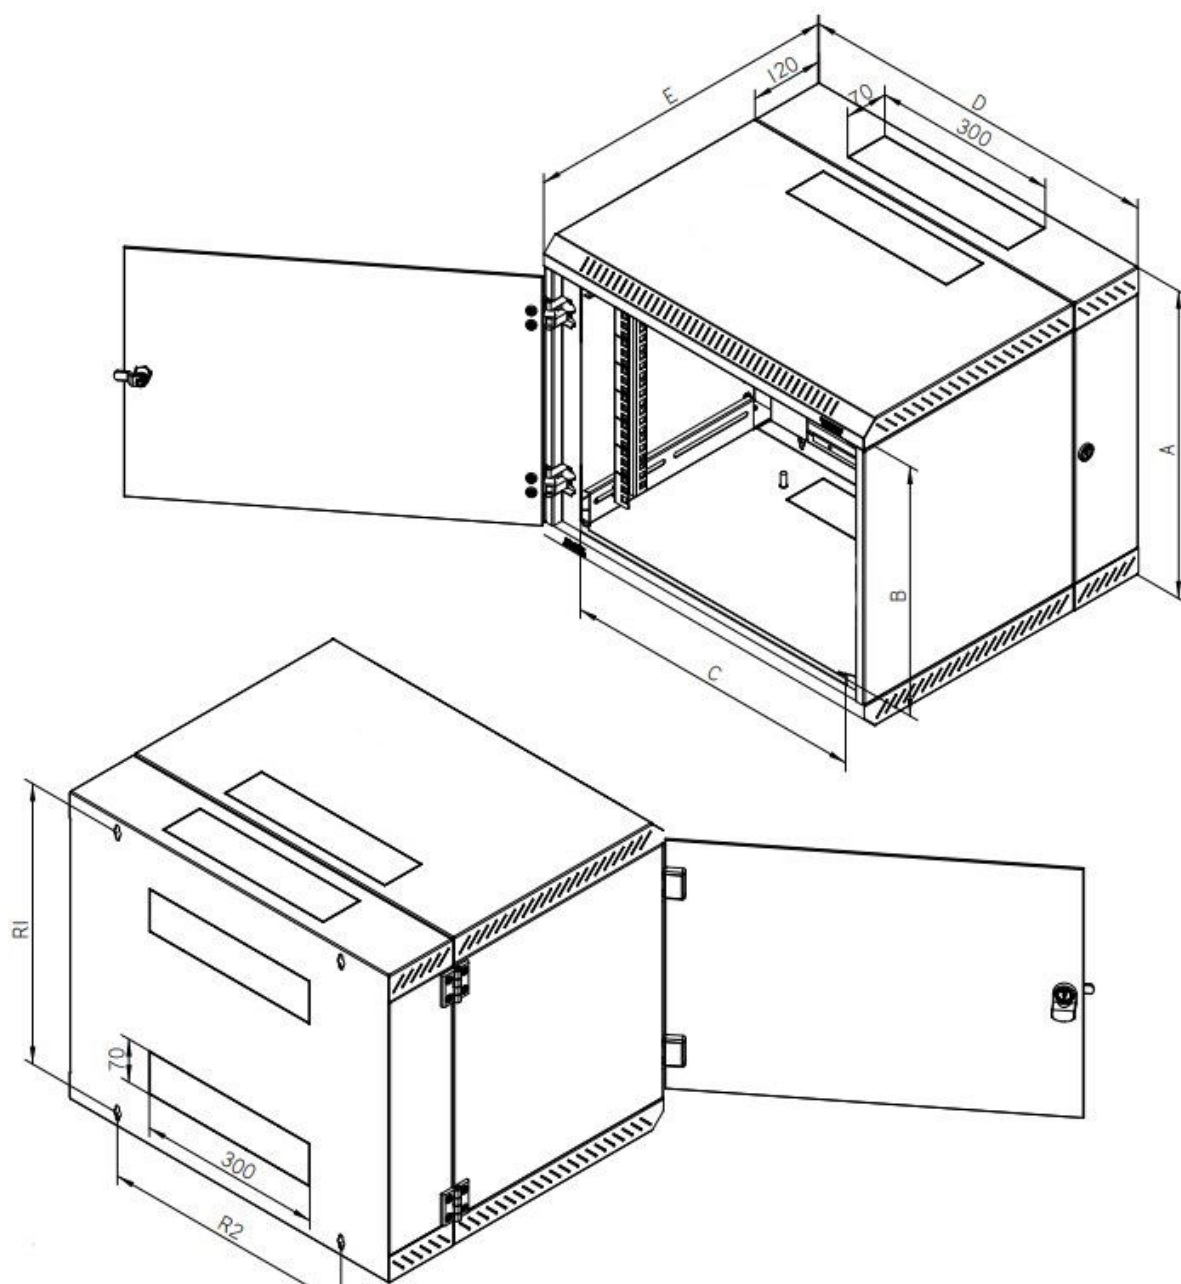Dimenzija: 19" Nazidni orman DUAL, trodelni, 21HU 1035/600/615(VxŠxD)

Schnittansicht der vertikalen 19"-Profilschienen

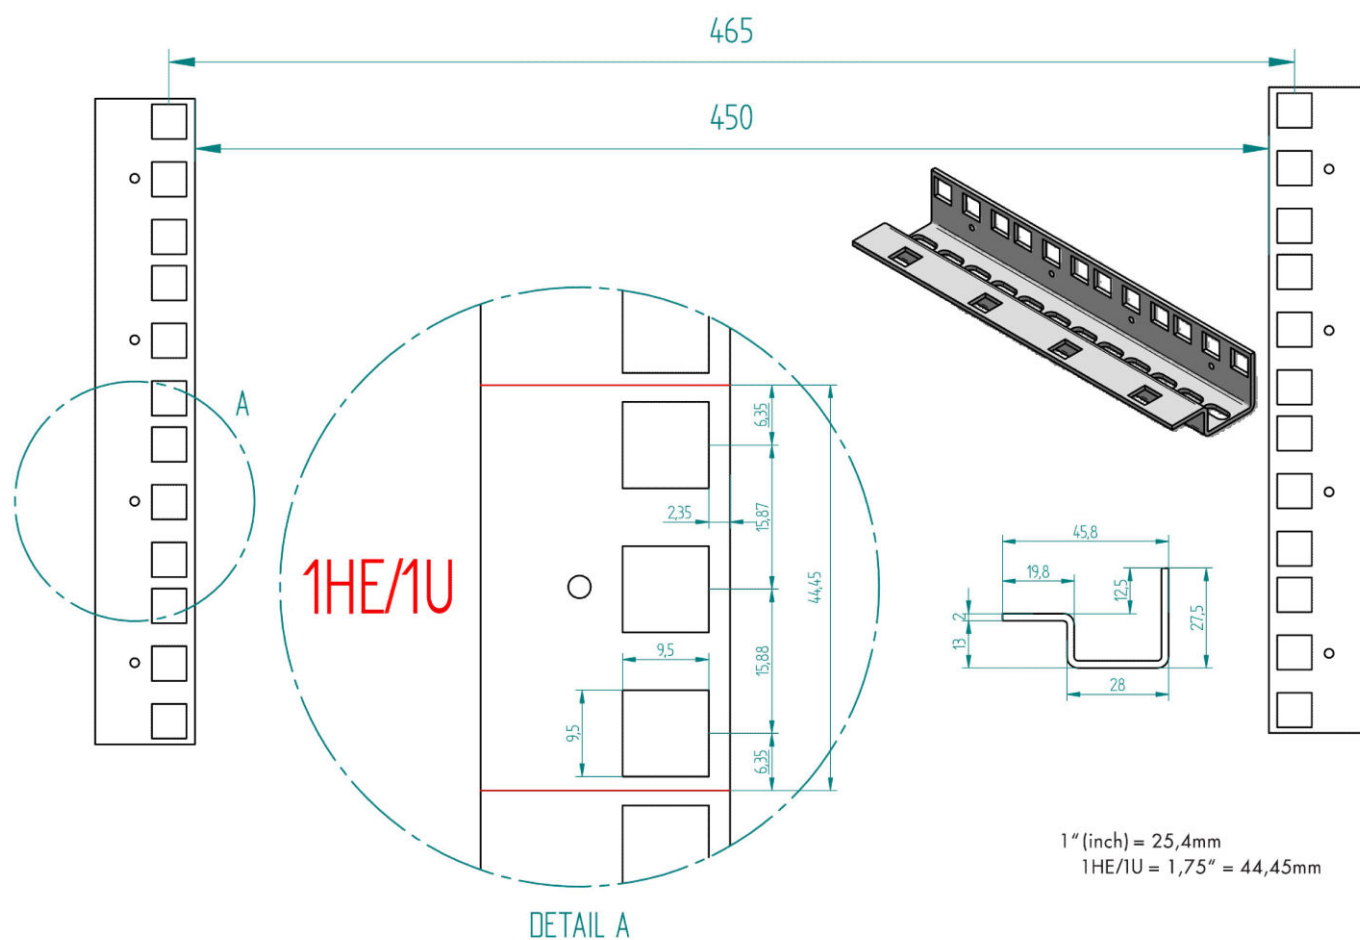


Tabela artikla

OPIS	Kat. broj
19" Nazidni orman DUAL, trodelni, 21 HU 1035/600/615 (VxŠxD)	DW21606D
Dodatni pribor	
19" Fiksna polica dubine 350mm, 1 HU, 50kg max, perforirana	DFS14835-C
19" Set za fiksiranje opreme M6 (vijak+kavez matica), 50 kom	DSSRA050
19" LED svetiljka, 700lm, montaža magnetom ili vijkom	DV900336-A
19" Napojni panel-9xSCHUKO, ALU, 1 HU	IU070114
19" Napojni panel-8xSCHUKO i prekidač, ALU, 1 HU kabl sa utikačem 2m, RAL7035	IU070124
19" Set nosača za police, za DW ormane	DFSZDW01
Switch 24xRJ45 10/100/1000, tihi, bez ventilatora, interni Metalno kućište, 19"	QLGSW2457
TOOLLESS LINE-19" Patch panel za 24 modula, prazan, visine 1 HU svetlo sivi, jezičak prespojnog kabla okrenut prema dole	HSER0240GS