

Tehničke karakteristike artikla: EV210025--

Prekidač za roletne dvostruki, IP54, sa blokadom, nazidni

na oprugu (utične priključne stezaljke)



SCHRACK info

Robust surface-mounted switch made of durable and weather-resistant, glass-fibre-reinforced thermoplastic material equipped with an electrical interlock so that simultaneous actuation of the rockers only switches through one output. The switch is IP54 splash-proof and also provides additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.



Tehnički podaci

Neto dužina (mm)	83,00
Neto širina (mm)	74,00
Neto visina (mm)	56,00
Neto težina (kg)	0,11
Serijski naziv	VISIO IP54
Tip artikla	Prekidač
Nazivni napon AC (V)	230

Tehnički podaci - nastavak

Struja uklopa (AX)	10
Način ugradnje	Nadgradna
Način pričvršćenja	Zašrafovan
IP stepen zaštite	IP54
Opis boje	sivo
Tip priključka	Kleme na oprugu
Dozvoljeni kablovi	Kruti
Dozvoljeni poprečni presek (mm ²)	1,5 und 2,5
Materijal	ABS Bakar
Okruženje	Halogen free
Održivost	ROHS
Test oznaka	VDE
Dimenzije (mm)	83x74x56

Abmessungen (mm)

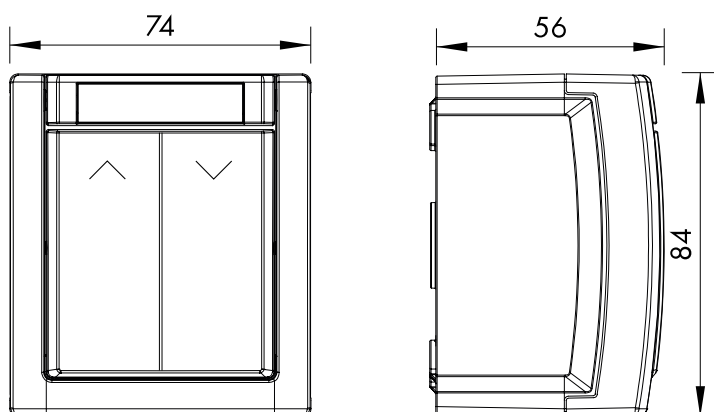


Tabela artikla

OPIS	Kat. broj
Prekidač za roletne dvostruki, IP54, sa blokadom, nazidni na oprugu (utične priključne stezaljke)	EV210025
Dodatni pribor	
Adapter za vertikalno dodavanje, IP54	EV217002
.	