



Tehničke karakteristike artikla: HLP23TC02F

FO Patch ST/UPC-SC/ UPC, OM3, duplex, LSOH, aqua, 2m

UPC-UPC, LSOH

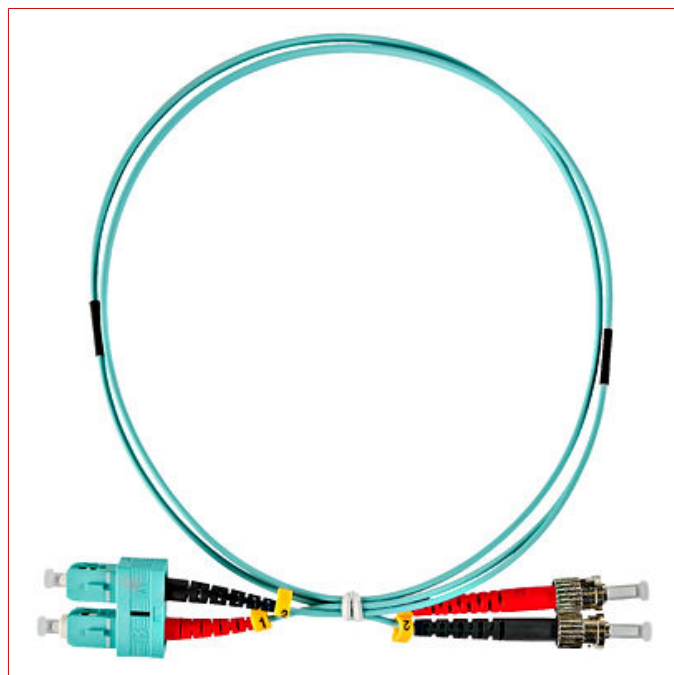

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- ST/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Standard proizvoda	IEC 61300-3-4 / IEC 61300-3-6
Norma kontaktora	IEC 61754
Kombinacija utičnica	SC/ST
Dužina Patch kabla (m)	2,0
Vlakno	50/125μ OM3 multimode
Spoljni omotač kabla	LS0H
Opis boje	aqua
Gubitak insertacije tipičan (dB)	≤0,25
Povratni gubitak tipičan (dB)	≥30
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	200,00
Neto visina (mm)	300,00
Neto težina (kg)	0,11

Dimenzija: FO Patch ST/UPC-SC/UPC, OM3, duplex, LS0H, aqua, 2m

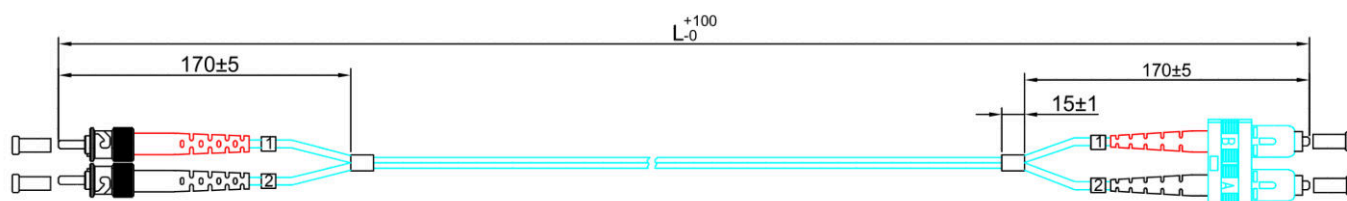

OPIS	Kat. broj
FO Patch ST/UPC-SC/UPC, OM3, duplex, LS0H, aqua, 2m	HLP23TC02F
UPC-UPC, LS0H	