


Tehničke karakteristike artikla: HLP24LC03F

FO Patch LC/UPC-SC/ UPC, OM4, duplex, LSOH, pastel roze, 3m

UPC-UPC, LSOH

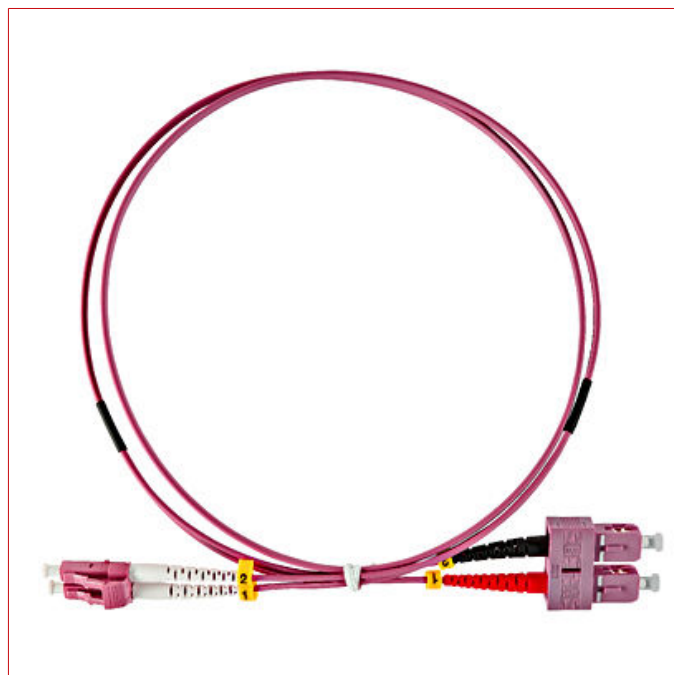

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Standard proizvoda	IEC 61300-3-4 / IEC 61300-3-6
Norma kontaktora	IEC 61754
Kombinacija utičnica	LC/SC
Dužina Patch kabla (m)	3,0
Vlakno	50/125μ OM4 multimode
Spoljni omotač kabla	LS0H
Opis boje	svetlo ljubičasta
Gubitak insertacije tipičan (dB)	≤0,25
Povratni gubitak tipičan (dB)	≥30
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	200,00
Neto visina (mm)	300,00
Neto težina (kg)	0,05

Dimenzija: FO Patch LC/UPC-SC/UPC, OM4, duplex, LS0H, pastel roze, 3m

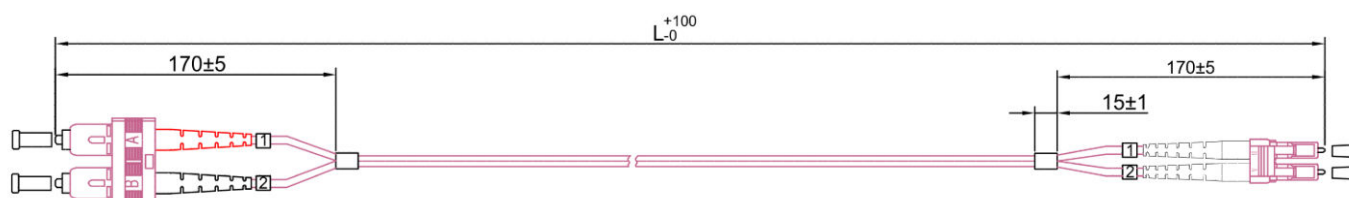

OPIS	Kat. broj
FO Patch LC/UPC-SC/UPC, OM4, duplex, LS0H, pastel roze, 3m	HLP24LC03F
UPC-UPC, LS0H	