

Tehničke karakteristike artikla: HLP29LL03F

FO Patch LC/UPC-LC/ UPC, OS2, duplex, LSOH, žuti, 3m

UPC-UPC, LSOH



SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Standard proizvoda	IEC 61300-3-4 / IEC 61300-3-6
Norma kontaktora	IEC 61754
Kombinacija utičnica	LC/LC
Tip konektora	LC čaura prečnika 1,25mm
Dužina Patch kabla (m)	3,0
Vlakno	9/125 μ OS2 singlemode
Spoljni omotač kabla	LS0H
Opis boje	žuto
Prečnik (mm)	2 x 2,2
Gubitak insertacije tipičan (dB)	$\leq 0,25$
Povratni gubitak tipičan (dB)	≥ 50
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Neto širina (mm)	200,00
Neto visina (mm)	300,00
Neto težina (kg)	0,11

Dimenzija: FO Patch LC/UPC-LC/UPC, OS2, duplex, LS0H, žuti, 3m

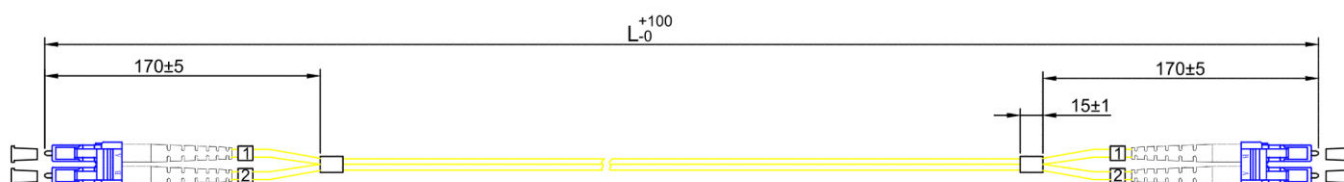

OPIS	Kat. broj
FO Patch LC/UPC-LC/UPC, OS2, duplex, LS0H, žuti, 3m	HLP29LL03F
UPC-UPC, LS0H	