


Tehničke karakteristike artikla: HLP2SLL00F

FO Patch LC/UPC-LC/ UPC, OM5, duplex, LSOH, lim.zeleni, 0.5m

UPC-UPC, LSOH



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Tehnički podaci

Neto širina (mm)	150,00
Neto visina (mm)	200,00
Neto težina (kg)	0,04
Standard proizvođa	IEC 61300-3-4 / IEC 61300-3-6
Norma kontaktora	IEC 61754
Kombinacija utičnica	LC/LC
Dužina Patch kabla (m)	0,50
Vlakno	50/125 OM5 Multimode
Spoljni omotač kabla	LS0H
Opis boje	limeta zelena
Gubitak insertacije tipičan (dB)	$\leq 0,25$
Povratni gubitak tipičan (dB)	≥ 30
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60

Dimenzija: FO Patch LC/UPC-LC/UPC, OM5, duplex, LS0H, lim.zeleni, 0.5m

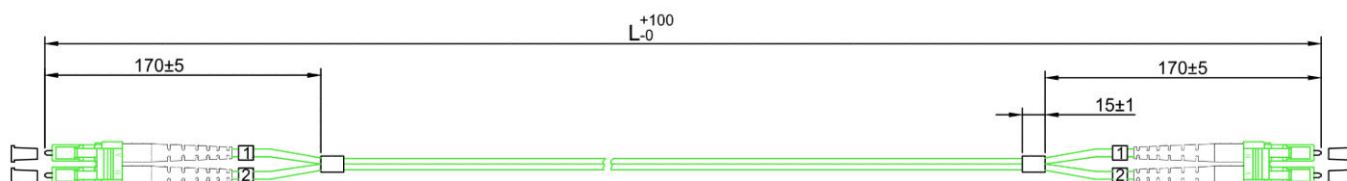

OPIS	Kat. broj
FO Patch LC/UPC-LC/UPC, OM5, duplex, LS0H, lim.zeleni, 0.5m	HLP2SLL00F
UPC-UPC, LS0H	