



Tehničke karakteristike artikla: HSEKP4233D

Kabl inst.Cat.7 S/FTP-1000 Mhz, 4x2xAWG-23, LSOH-3, Dca, plavi

plavi

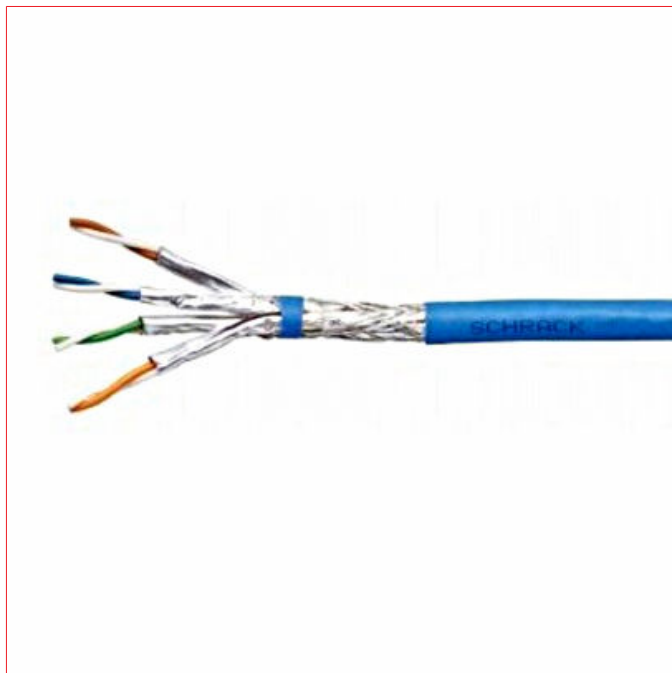

Tehnički podaci

Kategorija	Cat.7
Oklop kabla	S/FTP
Provodnik	4 individualno oklopljena para
Materijal provodnika	Solid bare copper AWG23/1
Kod boja	Par 1 Bela / Plava Par 2 Bela / Narandžasta Par 3 Bela / Zelena Par 4 Bela / Braon
Brzina prenosa	10Gbit
Materijal izolacije	Penasti polietilen
Oklop	oklopljen
Folija	Laminirani aluminijumski poliestar, aluminijum okrenut ka spolja (PiMF)
Overall Shield	Pun bakar
Pokrov pletenice (%)	30
Spoljni omotač kabla	LSOH-3

Tehnički podaci - nastavak

Plast/omotač	LSOH-3, FRNC u skladu sa: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Gorivost (kJ/m)	565
Spoljni prečnik (mm)	7,2
Nominalna težina (kg/km)	55
Boja	plavo
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Temperaturni okvir - Operativni (°C)	-20 do +60
Temperaturni okvir - instalacije (°C)	+0 do +50
Radius savijanja kabla - statični (Ø)	4
Radius savijanja kabla - Dinamični (Ø)	8
Max. tenzija pri izvlačenju (N)	110
Nazivni napon	< 72V DC i < 50V AC
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 2000
Capacitance unbalance pair to ground (pF/km)	< 1500
Loop resistance (Ω/km)	< 154
Razlika otpora (%)	1
Vreme signala (ns/m)	4,2
Otpornost spojeva	10mΩ/m @ 10MHz
Coupling damping typical (dB)	80
Frekvencije testirane do (MHz)	1000
SKEW (ns/100m)	< 20
NVP (%)	79
Neto dužina (mm)	1.000,00
Neto težina (kg)	0,06
Neto prečnik (mm)	7,20

Tabela artikla

OPIS	NVP (%)	MASA BAKRA (kg/km)	Kat. broj
Kabl inst.Cat.7 S/FTP-1000 Mhz, 4x2xAWG-23,LS0H-3,Dca,plavi plavi	79	25,5	HSEKP4233D
Dodatni pribor			
PERFORMANCE LINE-RJ45 modul,Cat.6a 10Gb STP,4PPoE 100W,(SFB) (SFB)			HSPMRJ6G1A
PERFORMANCE LINE-RJ45 modul, Class.Ea 10Gb STP, PoE+, (SFB) (SFB)			HSPMRJ6G1T
TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA), Ed.2.2 (SFA)			HSEMRJ6GWA
TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA) (SFA)			HSEMRJ6GWT
TOOLLESS LINE-RJ45 Modul, Cat.6, STP (SFA)			HSEMRJ6GWS
Nosač kablovskog bubnja pri odmotavanju, nosivost do 250kg			HTOOL00006
Kablovska čičak traka 16mm x 4m, back to back, crna			Q7KB0416-S
Kablovska čičak traka 16mm x 4m, back to back, plava			Q7KB0416-B
Kablovska čičak traka 16mm x 4m, back to back, crvena			Q7KB0416-R
Kablovska čičak traka 16mm x 4m, back to back, žuta			Q7KB0416-Y
Kablovska čičak traka 16mm x 4m, back to back, zelena			Q7KB0416-U