


Tehničke karakteristike artikla: HSKP8233D5

Kabl inst.Cat.7 S/FTP-1000 Mhz, 8x2xAWG-23, LS0H-3, Dca, plavi

plavi

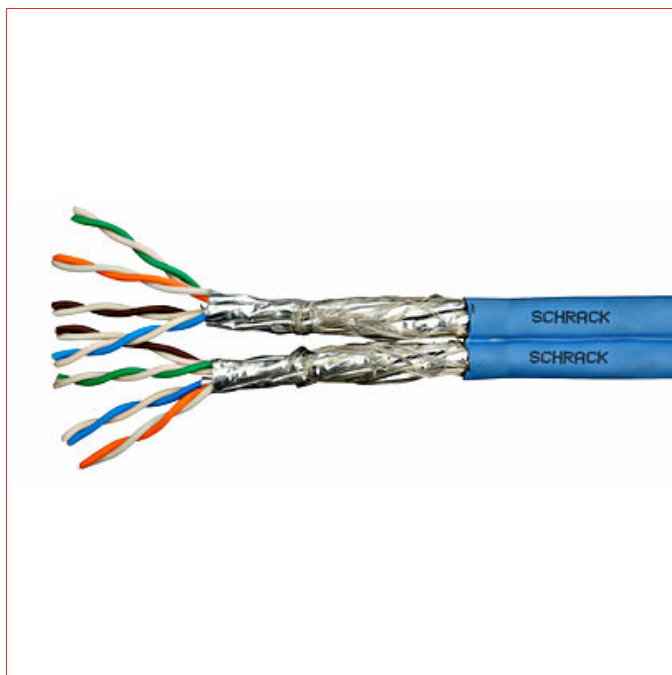

Tehnički podaci

Kategorija	Cat.7
Oklop kabla	S/FTP
Materijal provodnika	Solid bare copper AWG23/1
Kod boja	Par 1 Bela / Plava Par 2 Bela / Narandžasta Par 3 Bela / Zelena Par 4 Bela / Braon
Materijal izolacije	Penasti polietilen
Oklop	oklopljen
Folija	Laminirani aluminijumski poliester, aluminijum okrenut ka spolja (PiMF)
Overall Shield	Pun bakar
Pokrov pletenice (%)	30
Spoljni omotač kabla	LS0H-3
Plast/omotač	LS0H-3, FRNC u skladu sa: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Gorivost (kJ/m)	1130

Tehnički podaci - nastavak

Spoljni prečnik (mm)	7,2 x 14,4
Nominalna težina (kg/km)	110
Boja	plavo
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Temperaturni okvir - Operativni (°C)	-20 do +60
Temperaturni okvir - instalacije (°C)	+0 do +50
Radijus savijanja kabla - statični (Ø)	4
Radijus savijanja kabla - Dinamični (Ø)	8
Max. tenzija pri izvlačenju (N)	220
Nazivni napon	< 72V DC i < 50V AC
Max. continuous current per conductor (25°C) (A)	1,5
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 2000
Capacitance unbalance pair to ground (pF/km)	< 1500
Loop resistance (Ω/km)	< 154
Vreme signala (ns/m)	4,2
Otpornost spojeva	10mΩ/m @ 10MHz
Coupling damping typical (dB)	80
Frekvencije testirane do (MHz)	1000
SKEW (ns/100m)	< 20
NVP (%)	79
Neto dužina (mm)	1.000,00
Neto težina (kg)	0,11

Tabela artikla

OPIS	NVP (%)	Kat. broj
Kabl inst.Cat.7 S/FTP-1000 Mhz, 8x2xAWG-23,LS0H-3,Dca,plavi plavi	79	HSKP8233D5
Dodatni pribor		
PERFORMANCE LINE-RJ45 modul,Cat.6a 10Gb STP,4PPoE 100W,(SFB) (SFB)		HSPMRJ6G1A
PERFORMANCE LINE-RJ45 modul, Class.Ea 10Gb STP, PoE+, (SFB) (SFB)		HSPMRJ6G1T
TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA), Ed.2.2 (SFA)		HSEMRJ6GWA
TOOLLESS LINE-RJ45 Modul, Cat.6a 10Gbit, STP (SFA) (SFA)		HSEMRJ6GWT
TOOLLESS LINE-RJ45 Modul, Cat.6, STP (SFA)		HSEMRJ6GWS
Nosač kablovskog bubnja pri odmotavanju, nosivost do 250kg		HTOOL000006
Kablovska čičak traka 16mm x 4m, back to back, plava		Q7KB0416-B
Kablovska čičak traka 16mm x 4m, back to back, crvena		Q7KB0416-R
Kablovska čičak traka 16mm x 4m, back to back, crna		Q7KB0416-S
Kablovska čičak traka 16mm x 4m, back to back, žuta		Q7KB0416-Y
Kablovska čičak traka 16mm x 4m, back to back, zelena		Q7KB0416-U