


Tehničke karakteristike artikla: IL122539WS

# Masken-Zählerverteiler 5M-39M/WIEN 15ZP, H1855B1180T200mm

15 Mesta za brojila, 3 Redova brojila, 1 Downstream redovi, 57 Širine modula, Pokrovna ploča metal, Beč

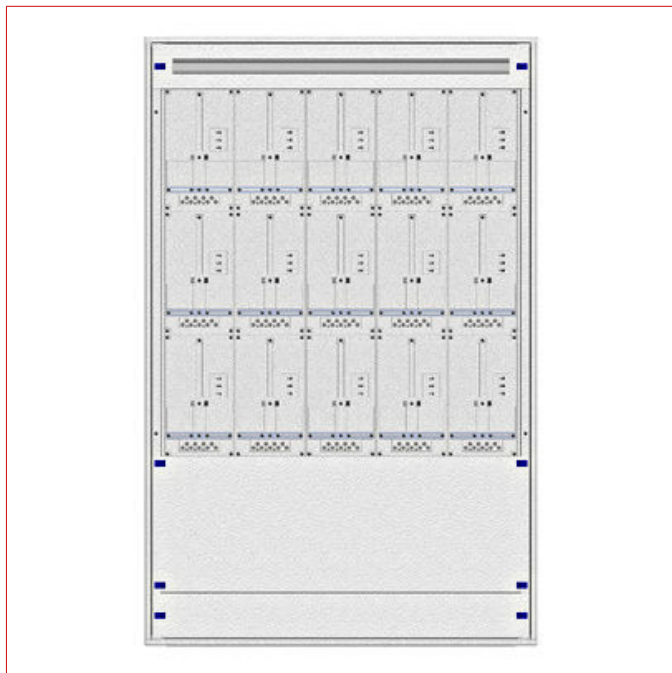

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler ohne Tür und PVC-Rückwand
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage
-



## Tehnički podaci

|                   |                                               |
|-------------------|-----------------------------------------------|
| Neto širina (mm)  | 1.180,00                                      |
| Neto visina (mm)  | 1.855,00                                      |
| Neto dubina (mm)  | 200,00                                        |
| EAN               | 9004840629156                                 |
| Gubitak snage (W) | -782,00                                       |
| Tip               | Maskirna razvodna tabla sa brojiлом (komplet) |
| Regija            | Beč                                           |
| Umeci             | Prednje maske metalne                         |
| Opis boje         | RAL 7035                                      |
| Širina brojila    | 5                                             |
| Visina unit-a     | 39                                            |
| Redova brojila    | 3                                             |
| Mesta za brojila  | 15                                            |
| IP stepen zaštite | IP20C                                         |
| Downstream redovi | 1                                             |
| Pokrovna ploča    | metal                                         |
| Osnovni opis      | Kućište                                       |
| Širine modula     | 57                                            |

## Tabela artikla

| OPIS                                                                                                    | MASA BAKRA (kg/km) | Kat. broj  |
|---------------------------------------------------------------------------------------------------------|--------------------|------------|
| Masken-Zählerteiler 5M-39M/WIEN 15ZP, H1855B1180T200mm                                                  |                    |            |
| 15 Mesta za brojila, 3 Redova brojila, 1 Downstream redovi, 57 Širine modula, Pokrovna ploča metal, Beč |                    | IL122539WS |
| <b>Dodatni pribor</b>                                                                                   |                    |            |
| Podnožje dubine 200mm razdelnika za 0 (1 par)                                                           |                    | IL091120   |
| Podnožje širine 5 razdelnika za                                                                         |                    | IL091050   |
| Samol. natpisna folija sa piktogramima, 1 m                                                             |                    | BK002401   |
| Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035                                                     |                    |            |
| pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                             |                    | IL900251   |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | Kat. broj  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |