


Tehničke karakteristike artikla: IL153224GS

# Masken-Zählerverteiler 2M-24E/STMK 2ZP, H1105B540T200mm

2 Mesta za brojila, 1 Redova brojila, 3 Downstream redovi, 63 Širine modula, Pokrovnna ploča metal, Štajerska

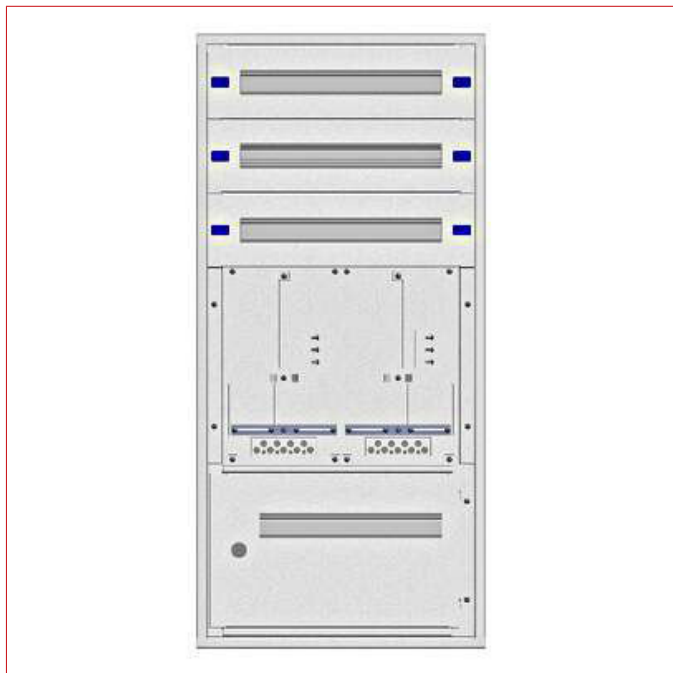

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung Ue: 230/400V/50Hz
- Bemessungsisolationsspannung Ui: 1000V
- Bemessungsstoßspannungsfestigkeit Uimp: 6kV
- Bemessungskurzzeitstromfestigkeit Icw: 25kA / 1s
- Bemessungsstoßstromfestigkeit Ipk: 54kA
- Bedingter Bemessungskurzschlussstrom Icc: 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                   |                                               |
|-------------------|-----------------------------------------------|
| Neto širina (mm)  | 540,00                                        |
| Neto visina (mm)  | 1.150,00                                      |
| Neto dubina (mm)  | 200,00                                        |
| EAN               | 9004840634303                                 |
| Gubitak snage (W) | -276,00                                       |
| Tip               | Maskirna razvodna tabla sa brojiлом (komplet) |
| Regija            | Štajerska                                     |
| Umeci             | Prednje maske metalne                         |
| Opis boje         | RAL 7035                                      |
| Širina brojila    | 2                                             |
| Visina unit-a     | 24                                            |
| Redova brojila    | 1                                             |
| Mesta za brojila  | 2                                             |
| IP stepen zaštite | IP20C                                         |
| Downstream redovi | 3                                             |
| Pokrovná ploča    | metal                                         |
| Osnovni opis      | Kućište                                       |
| Širine modula     | 63                                            |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | Kat. broj  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Masken-Zählerverteiler 2M-24E/STMK 2ZP, H1105B540T200mm                                                                                                                                                                                                                                        |                    |            |
| 2 Mesta za brojila, 1 Redova brojila, 3 Downstream redovi, 63 Širine modula, Pokrovna ploča metal, Štajerska                                                                                                                                                                                   |                    | IL153224GS |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Podnožje dubine 200mm razdelnika za 0 (1 par)                                                                                                                                                                                                                                                  |                    | IL091120   |
| Podnožje širine 2 razdelnika za                                                                                                                                                                                                                                                                |                    | IL091020   |
| Samol. natpisna folija sa piktogramima, 1m                                                                                                                                                                                                                                                     |                    | BK002401   |
| Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035                                                                                                                                                                                                                                            |                    | IL900251   |
| pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                                                                                                                                                                                                    |                    |            |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |