


Tehničke karakteristike artikla: IL154283GS

Masken-Zählerverteiler 2M-33G/STMK 4ZP, H1565B540T200mm V2

4 Mesta za brojila, 2 Redova brojila, 1 Downstream redovi, 21 Širine modula, Pokrovnna ploča metal, Štajerska

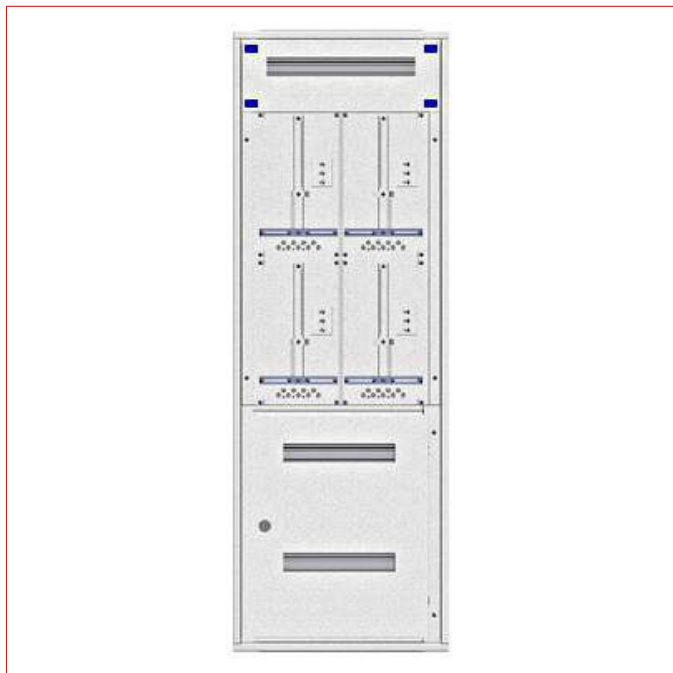

SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Tehnički podaci

Neto širina (mm)	540,00
Neto visina (mm)	1.565,00
Neto dubina (mm)	200,00
EAN	9004840636680
Gubitak snage (W)	-365,00
Tip	Maskirna razvodna tabla sa brojiлом (komplet)
Regija	Štajerska
Umeci	Prednje maske metalne
Opis boje	RAL 7035
Širina brojila	2
Visina unit-a	33
Redova brojila	2
Mesta za brojila	4
IP stepen zaštite	IP20C
Downstream redovi	1
Pokrovna ploča	metal
Osnovni opis	Kućište
Širine modula	21

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
Masken-Zählerverteiler 2M-33G/STMK 4ZP, H1565B540T200mm V2		
4 Mesta za brojila, 2 Redova brojila, 1 Downstream redovi, 21 Širine modula, Pokrovna ploča metal, Štajerska		IL154283GS
Dodatni pribor		
Podnožje dubine 200mm razdelnika za 0 (1 par)		IL091120
Podnožje širine 2 razdelnika za		IL091020
Samol. natpisna folija sa piktogramima, 1 m		BK002401
Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035		
pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi		IL900251

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
Dodatni pribor		
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824