


Tehničke karakteristike artikla: IL162533GS

Aufputz-Zählerverteiler 5A-33G/STMK 10ZP, H1605B 1230T250mmV1

10 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 171 Širine modula, Pokrovna ploča metal, Štajerska

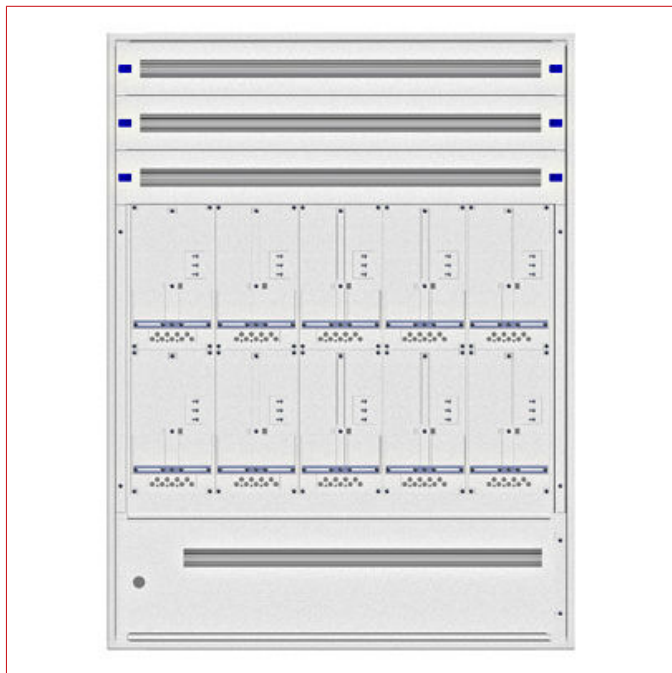

SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Tehnički podaci

Neto širina (mm)	590,00
Neto visina (mm)	1.605,00
Neto dubina (mm)	250,00
EAN	9004840641516
Gubitak snage (W)	-754,00
Tip	Nazidna tabla sa umetkom za brojila (komplet)
Regija	Štajerska
Umeci	Prednje maske metalne
Opis boje	RAL 7035
Širina brojila	5
Visina unit-a	33
Redova brojila	2
Mesta za brojila	10
IP stepen zaštite	IP20C
Downstream redovi	3
Pokrovna ploča	metal
Osnovni opis	Kućište
Širine modula	171

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
Aufputz-Zählerverteiler 5A-33G/STMK 10ZP, H1605B I230T250mmV1		
10 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 171 Širine modula, Pokrovna ploča metal, Štajerska		IL162533GS
Dodatni pribor		
Podnožje dubine 250mm razdelnika za 0 (1 par) visina 100mm, isporuka u paru (lijevi + desni bočni dio), mogućnost sastavljanja 2 postolja u postolje visine 200mm, primjenjivi kod ormara u izvedbi IP20-C i IP54		IL091125
Prednji deo osnove za zidno kućište U-profil, širina 5 redizajniran U-profil Dubina 15mm do 8mm smanjena, 2mm čelični lim		IL091500-S
Brava 61005 sa ključem s jednim ključem		IL900200-F

Tabela artikla

OPIS	MASA BAKRA (kg/km)	Kat. broj
Dodatni pribor		
Brava H36000 uključena i 2 ključa s dva ključa		IL900202-F
Prirubnica Sa Perforacijama, Vel.2,3,4,5, 426X130X18Mm 426x130x15mm (ŠxVxD), za ormare IL001/006/009/036 širine 2,3, 4, 5. Kabelski prolazi: 28x13mm, 16x17mm i 4x30mm		IL900102
Perforirana ploča za uvod kablova IP20C, 18x18-30mm uvodnica za IL001/006/009/036 širina 2,3,4,5		IL900105
Zidni nosač ,komplet		IL900020-F
Samol. natpisna folija sa piktogramima, 1m		BK002401
Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035 pokrov praznih mesta u razdjelniku, skraćivanje po potrebi		IL900251
Metalni Z instalacioni cilindar sa dva ključa s dva ključa		IL900201-F
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824