


Tehničke karakteristike artikla: IL162539GS

# Aufputz-Zählerverteiler 5A-39G/STMK 10ZP, H1885B 1230T250mm

10 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 171 Širine modula, Pokrovnna ploča metal, Štajerska

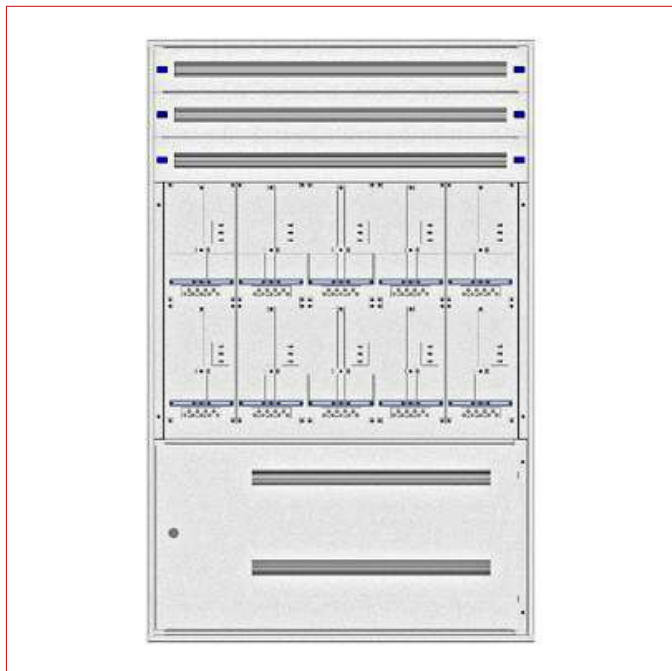

## SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                   |                                               |
|-------------------|-----------------------------------------------|
| Neto širina (mm)  | 590,00                                        |
| Neto visina (mm)  | 1.885,00                                      |
| Neto dubina (mm)  | 250,00                                        |
| EAN               | 9004840641592                                 |
| Gubitak snage (W) | -871,00                                       |
| Tip               | Nazidna tabla sa umetkom za brojila (komplet) |
| Regija            | Štajerska                                     |
| Umeci             | Prednje maske metalne                         |
| Opis boje         | RAL 7035                                      |
| Širina brojila    | 5                                             |
| Visina unit-a     | 39                                            |
| Redova brojila    | 2                                             |
| Mesta za brojila  | 10                                            |
| IP stepen zaštite | IP20C                                         |
| Downstream redovi | 3                                             |
| Pokrovnna ploča   | metal                                         |
| Osnovni opis      | Kućište                                       |
| Širine modula     | 171                                           |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                                                                              | MASA BAKRA (kg/km) | Kat. broj  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Aufputz-Zählerverteiler 5A-39G/STMK 10ZP, H1885B 1230T250mm<br>10 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 171 Širine modula, Pokrovna ploča metal, Štajerska                                                                                                                                                                     |                    | IL162539GS |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                             |                    |            |
| Podnožje dubine 250mm razdelnika za 0 (1 par)<br>visina 100mm, isporuka u paru (lijevi + desni bočni dio), mogućnost sastavljanja 2 postolja u postolje visine 200mm, primjenjivi kod ormara u izvedbi IP20-C i IP54                                                                                                                              |                    | IL091125   |
| Prednji deo osnove za zidno kućište U-profil, širina 5<br>redizajniran U-profil Dubina 15mm do 8mm smanjena, 2mm čelični lim                                                                                                                                                                                                                      |                    | IL091500-S |
| Brava 61005 sa ključem<br>s jednim ključem                                                                                                                                                                                                                                                                                                        |                    | IL900200-F |
| Brava H36000 uključena i 2 ključa<br>s dva ključa                                                                                                                                                                                                                                                                                                 |                    | IL900202-F |
| Prirubnica Sa Perforacijama, Vel.2,3,4,5, 426X130X18Mm<br>426x130x15mm (ŠxVxD), za ormare IL001/006/009/036 širine 2,3, 4, 5. Kabelski prolazi:<br>28x13mm, 16x17mm i 4x30mm                                                                                                                                                                      |                    | IL900102   |
| Perforirana ploča za uvod kablova IP20C, 18x18-30mm uvodnica<br>za IL001/006/009/036 širina 2,3,4,5                                                                                                                                                                                                                                               |                    | IL900105   |
| Zidni nosač ,komplet                                                                                                                                                                                                                                                                                                                              |                    | IL900020-F |
| Samol. natpisna folija sa piktogramima, 1 m                                                                                                                                                                                                                                                                                                       |                    | BK002401   |
| Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035<br>pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                                                                                                                                                                                                |                    | IL900251   |
| Metalni Z instalacioni cilindar sa dva ključa<br>s dva ključa                                                                                                                                                                                                                                                                                     |                    | IL900201-F |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                   |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                    |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | Kat. broj |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |           |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |           |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820  |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |           |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824  |