


Tehničke karakteristike artikla: IL166439GS

# Unterputz-Zählerverteiler 4U-39G/STMK 8ZP, H1885B1030T250mm

8 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 135 Širine modula, Pokrovn ploča metal, Štajerska

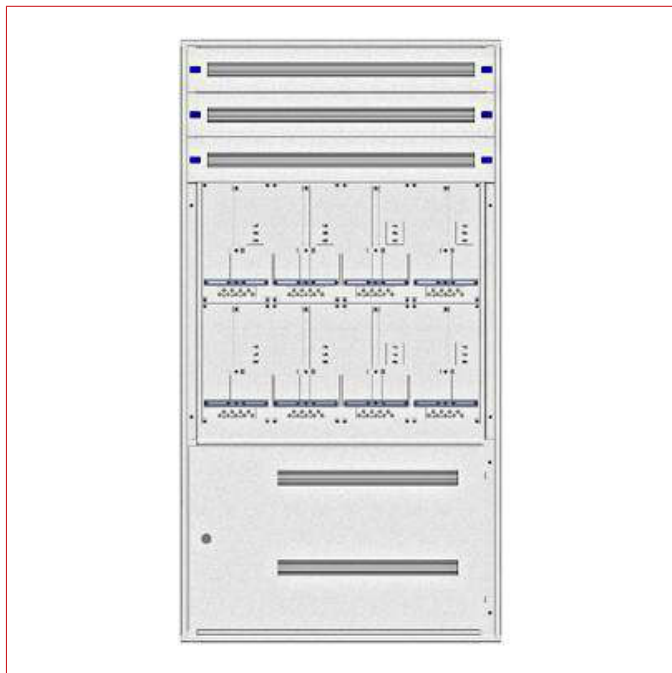

## SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungs kurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungs kurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß)

- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Neto širina (mm)  | 590,00                                                |
| Neto visina (mm)  | 1.885,00                                              |
| Neto dubina (mm)  | 250,00                                                |
| EAN               | 9004840645187                                         |
| Gubitak snage (W) | -649,00                                               |
| Tip               | Uzidna razvodna tabla sa umetkom za brojila (komplet) |
| Regija            | Štajerska                                             |
| Umeci             | Prednje maske metalne                                 |
| Opis boje         | RAL 9016                                              |
| Širina brojila    | 4                                                     |
| Visina unit-a     | 39                                                    |
| Redova brojila    | 2                                                     |
| Mesta za brojila  | 8                                                     |
| IP stepen zaštite | IP20C                                                 |
| Downstream redovi | 3                                                     |
| Pokrovna ploča    | metal                                                 |
| Osnovni opis      | Kućište                                               |
| Širine modula     | 135                                                   |

## Tabela artikla

| OPIS                                                                                                            | MASA BAKRA (kg/km) | Kat. broj  |
|-----------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Unterputz-Zählerverteiler 4U-39G/STMK 8ZP, H1885B1030T250mm                                                     |                    |            |
| 8 Mesta za brojila, 2 Redova brojila, 3 Downstream redovi, 135 Širine modula, Pokrovna ploča metal, Štajerska   |                    | IL166439GS |
| <b>Dodatni pribor</b>                                                                                           |                    |            |
| Brava 61005 sa ključem s jednim ključem                                                                         |                    | IL900200-F |
| Samol. natpisna folija sa piktogramima, 1 m                                                                     |                    | BK002401   |
| Pokrivna traka, slepa, 1000x50x8mm, glatka, RAL7035 pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi |                    | IL900251   |
| Vertikalni spojni nosači sa konektorima i šrafovim M5x12 2 kom. nosača i 4 kom. M5x12 vijaka                    |                    | IL369001   |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | Kat. broj  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Metalni Z instalacioni cilindar sa dva ključa<br>s dva ključa                                                                                                                                                                                                                                  |                    | IL900201-F |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |