


Tehničke karakteristike artikla: IL198473-A

# Metering insert 4-33G compl. 8 cou. pl. front pl. st. STMK

Frontblende Stahlblech

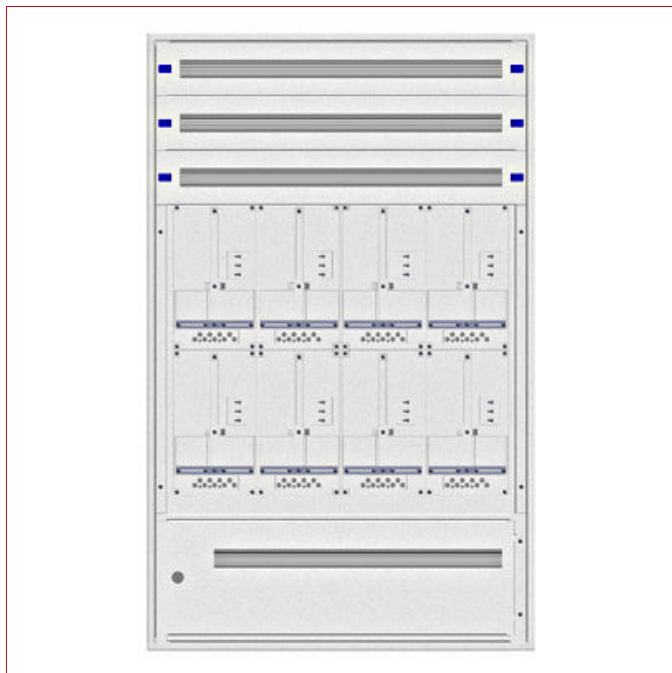

## Tehnički podaci

|                   |                                 |
|-------------------|---------------------------------|
| Neto širina (mm)  | 940,00                          |
| Neto visina (mm)  | 1.520,00                        |
| Neto dubina (mm)  | 102,00                          |
| EAN               | 9004840967586                   |
| Tip               | Umetak za razdjelnik s brojiлом |
| Regija            | Štajerska                       |
| Umeći             | Prednje maske plastične         |
| Opis boje         | RAL 7035                        |
| Širina brojila    | 4                               |
| Visina unit-a     | 33                              |
| Redova brojila    | 2                               |
| Mesta za brojila  | 8                               |
| Downstream redovi | 3                               |
| Pokrovna ploča    | metal                           |
| Osnovni opis      | Umetak                          |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | Kat. broj  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Metering insert 4-33G compl. 8 cou. pl. front pl. st. STMK<br>Frontblende Stahlblech                                                                                                                                                                                                                                                                           |                    | IL198473-A |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                          |                    |            |
| Set za uzemljenje 300mm, P/F 6mm <sup>2</sup> Ž-Z<br>Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci                                                                                                                                                                                                        |                    | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |