

Tehničke karakteristike artikla: INSHK002--

Pomoćni kontakt 1NO/1NC za seriju INSE IP20

za INSE... Grebenaste sklopke




Tehnički podaci

Verzija	Pribor
Standard	IEC 60947, EN 60947, VDE 0660
Nazivni napon izolacije (V)	500
Frekvencija (Hz)	50/60
Operating Current	AC-15 - 120V - 6A AC-15 - 230V - 3A DC-13 - 250V - 0.3A DC-13 - 125V - 1.1A AC-15 - 500V - 1.4A
Priključak	
Moment zatezanja (Nm)	1, 10
Presek priključnih provodnika, višezilni provodnik (mm²)	2x0,75-4
Presek priključka, jednožilni (mm²)	0,75-4
Presek priključnog provodnika, finožični provodnik sa hilznom (mm²)	2x0,75-4
Retrofit contacts	
Pomoćni kontakti	The number of auxiliary contacts that can be installed on the various switches is specified in detail in the respective data sheet for the item.




Tehnički podaci - nastavak

Radna temperatura	-25°C to +55°C
Mehanički životni vek	100000 switching cycles
Gubitak snage po polu (W)	0,35
Zaštita od dodira	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP stepen zaštite	IP20 (terminals)
Lockable	No
Neto dužina (mm)	32,00
Neto širina (mm)	50,00
Neto visina (mm)	10,60
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	55

Schaltbild INSHK002--



Maßbild INSHK002--

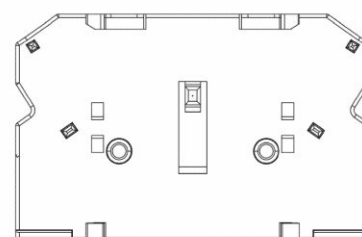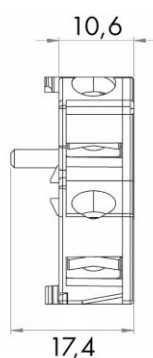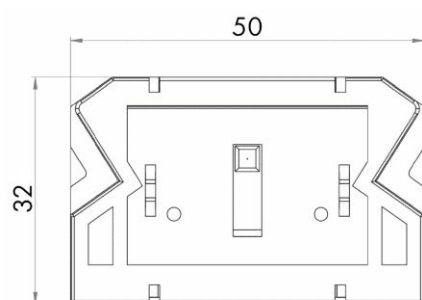

[mm]

OPIS

Pomoćni kontakt 1NO/1NC za seriju INSE IP20
za INSE... Grebenaste sklopke

Kat. broj

INSHK002