

Tehničke karakteristike artikla: IS010130--

Odv. POWERTEC PF 25kA +H, T1 275, 3+0, utični, ug. osigurač

integiran osigurač, utična izvedba




Tehnički podaci

Strujno kolo	3+0
Trajni napon AC (VAC)	275
Impulsna struja (kA)	25
Nazivna odvodna struja (kA)	25
Maks. struja pražnjenja (kA)	65
Nivo zaštite (kV)	1900
Širina jednog modula (17,5mm)	6
Signalni kontakt	da
Nazivni napon	240VAC
Nazivna prekidna moć	100
Specific Energy (kJ/Ω)	156,20
Charge (As)	12,50
Vrijeme odziva (ns)	<100
Overcurrent Protection (max) (A gG)	nicht notwendig
TOV SafeFail 120min (L-N) (V)	442
Follow Current Interrupt Rating (A)	100


Tehnički podaci - nastavak

Open Circuit Voltage of Combination Wave Generator (1,2/50μs) (kV)	6
Short Circuit Current of Combination Wave Generator (8/20μs) (kA)	3

Circuit diagram IS010130--

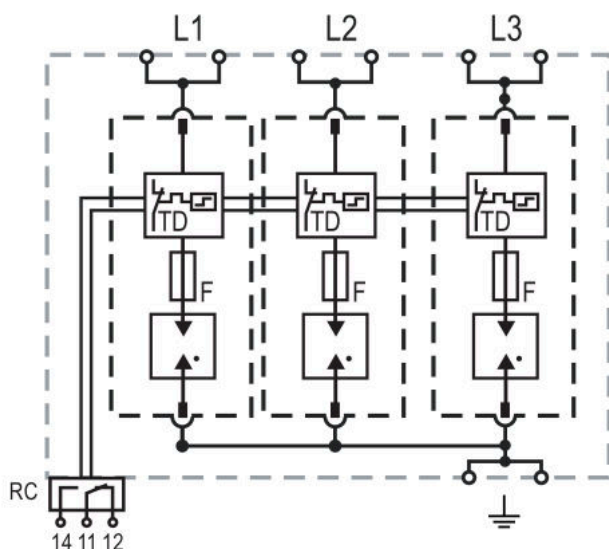

Dimension diagram IS010130-- [mm/inch]

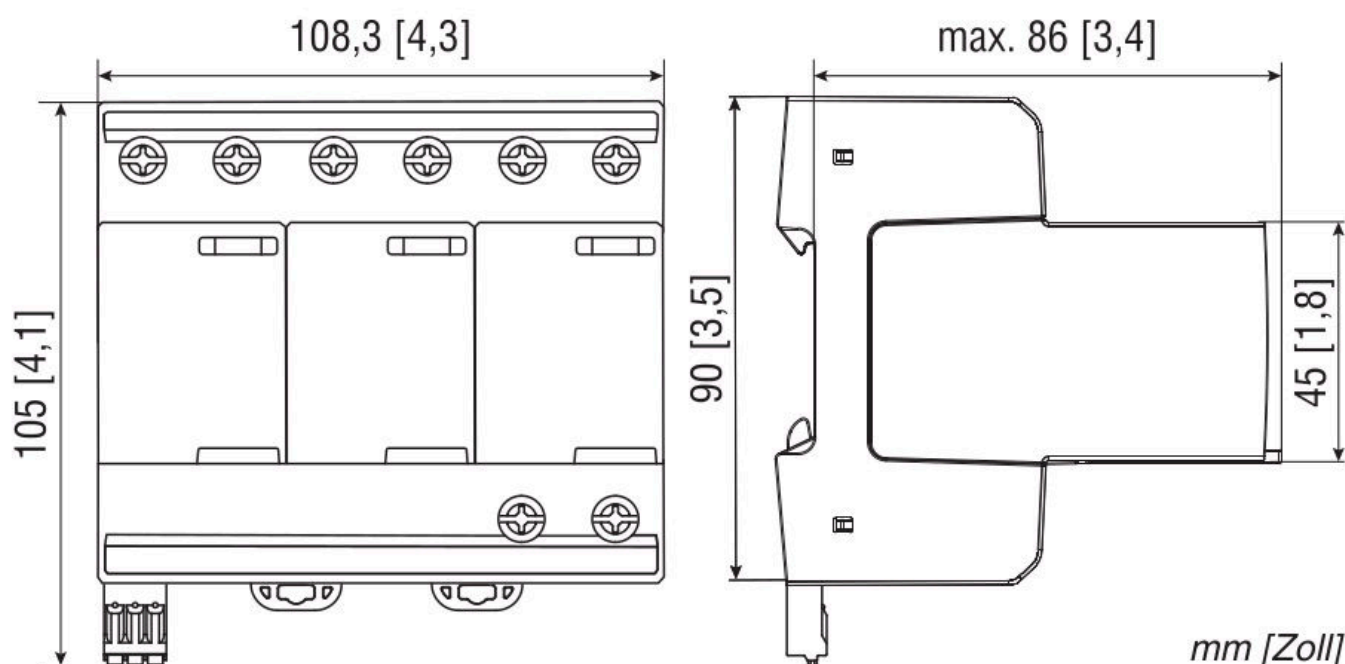

OPIS	Kat. broj
Odv. POWERTEC PF 25kA +H, T1 275, 3+0, utični, ug. osigurač integiran osigurač, utična izvedba	IS010130