

Tehničke karakteristike artikla: IS010140--

# Odv. POWERTEC PF 25kA +H, T1 275, 4+0, utični, ug. osigurač




## Tehnički podaci

|                                     |                       |
|-------------------------------------|-----------------------|
| Strujno kolo                        | 4+0                   |
| Trajni napon AC (VAC)               | 275(L-PE)/305(N-PE)   |
| Impulsna struja (kA)                | 25                    |
| Nazivna odvodna struja (kA)         | 25                    |
| Maks. struja pražnjenja (kA)        | 65                    |
| Nivo zaštite (kV)                   | 1900(L-PE)/1500(N-PE) |
| Širina jednog modula (17,5mm)       | 8                     |
| Signalni kontakt                    | da                    |
| Nazivni napon                       | 240VAC                |
| Nazivna prekidna moć                | 100                   |
| Specific Energy (kJ/Ω)              | 156,20                |
| Charge (As)                         | 12,50                 |
| Vrijeme odziva (ns)                 | <100                  |
| Overcurrent Protection (max) (A gG) | nicht notwendig       |
| TOV SafeFail 120min (L-N) (V)       | 442                   |
| TOV Withstand 200ms (N-PE) (V)      | 1200                  |
| Follow Current Interrupt Rating (A) | 100                   |


## Tehnički podaci - nastavak

|                                                                             |   |
|-----------------------------------------------------------------------------|---|
| Open Circuit Voltage of Combination Wave Generator (1,2/50 $\mu$ s)<br>(kV) | 6 |
| Short Circuit Current of Combination Wave Generator (8/20 $\mu$ s) (kA)     | 3 |

## Circuit diagram IS010140--

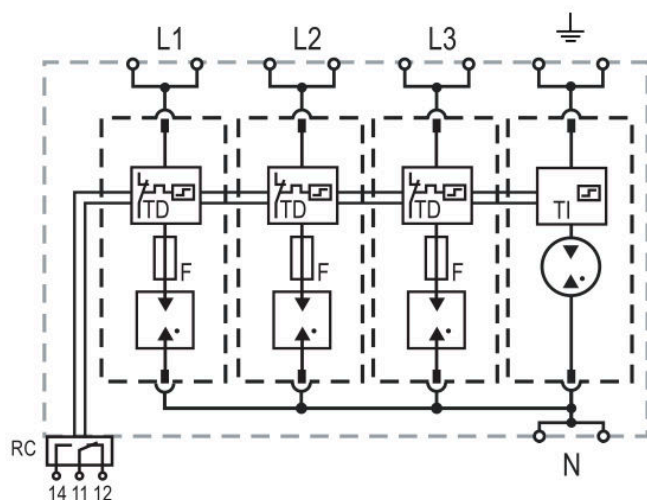

## Dimension diagram IS010140-- [mm/inch]

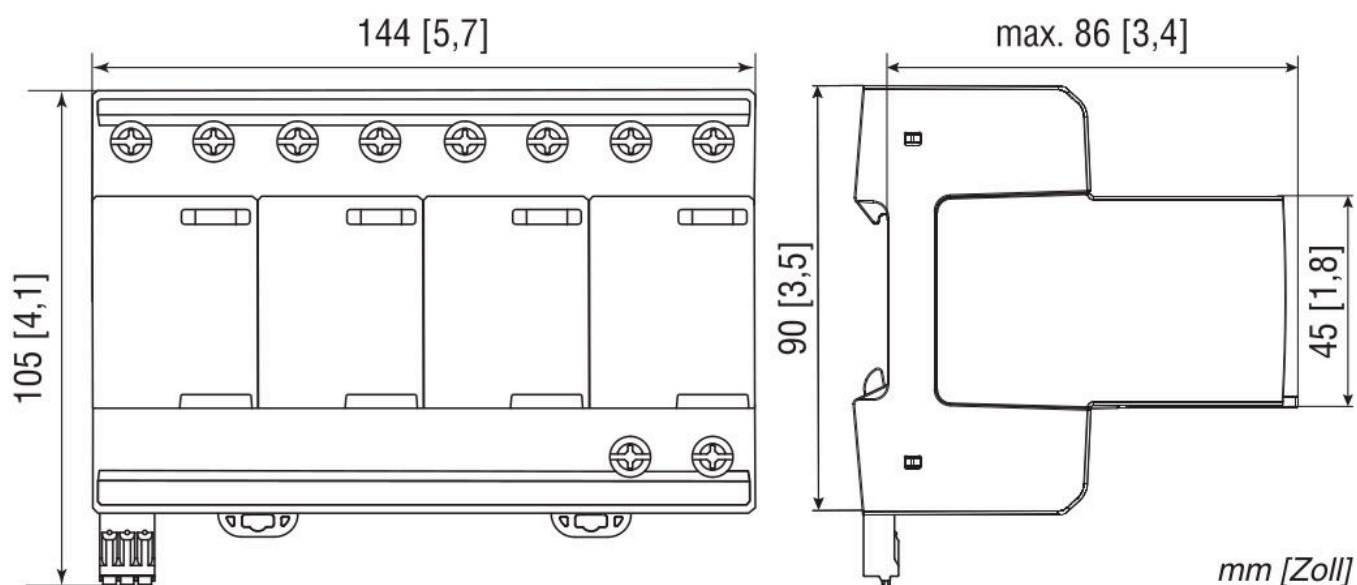

OPIS

Kat. broj

Odv. POWERTEC PF 25kA +H, T1 275, 4+0, utični, ug. osigurač

IS010140