

Tehničke karakteristike artikla: IU070127-A

19"SYSTEM RACK 27U/ 1-struki okvir/ 1340x600x700 (VxŠxD), 150kg

jednostruki profil, pocinkovan/galvanizovan



SCHRACK-Info

These 19"- systemracks are used when access to the equipment from all sides is necessary all the time.

Also frequently used for presentation of 19"- devices in show-rooms or on exhibitions.

The single section racks are designed for installations without heavy equipment.

The double section racks are designed for installation of heavier and larger equipment.

The in the double section racks included stabilization set increases stability of the whole rack in case of installation of slide-out devices, e.g. servers.

Installation:

- Direct on floor.
- By use of the included levelling feet in case of uneven floor.
- By use of optional castors with brake (Ordernumber: DSR00005-A).

MOUNTING OF THE FRAME

- To ensure the maximum recommended load, it is necessary to distribute the load equally. It is necessary to prevent one-side or one -point loading of the frame.
- Place the frame on a flat floor and compensate an eventual small roughness with nivelation feet.

CERTIFICATE AND CONFORMITY

- This product is fully in accordance with EN 62208 ed 2:2012.


Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	1.340,00
Neto dubina (mm)	600,00
Neto težina (kg)	19,00
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Prikladno za visinu unit-a	27U-1365mm

Lista fajlova: 19"SYSTEM RACK 27U/ 1-struki okvir/ 1340x600x700 (VxŠxD), 150kg

	A[mm]	B[mm]	D[mm]	E[mm]	Maximallast bei gleichmäßiger Verteilung[kg]	Gewicht Brutto[kg]	Gewicht Netto[kg]
IU070127-A	1340	-	600		150	24,2	19
IU070141-A	2005	-	600		150	27,7	22,4
IU070227-A	1340	664	700		150	36,9	31,4
IU070242-A	2005	664	700		150	43,8	38,3

**Dimenzija: 19"SYSTEM RACK 27U/ 1-struki okvir/ 1340x600x700
(VxŠxD), 150kg**

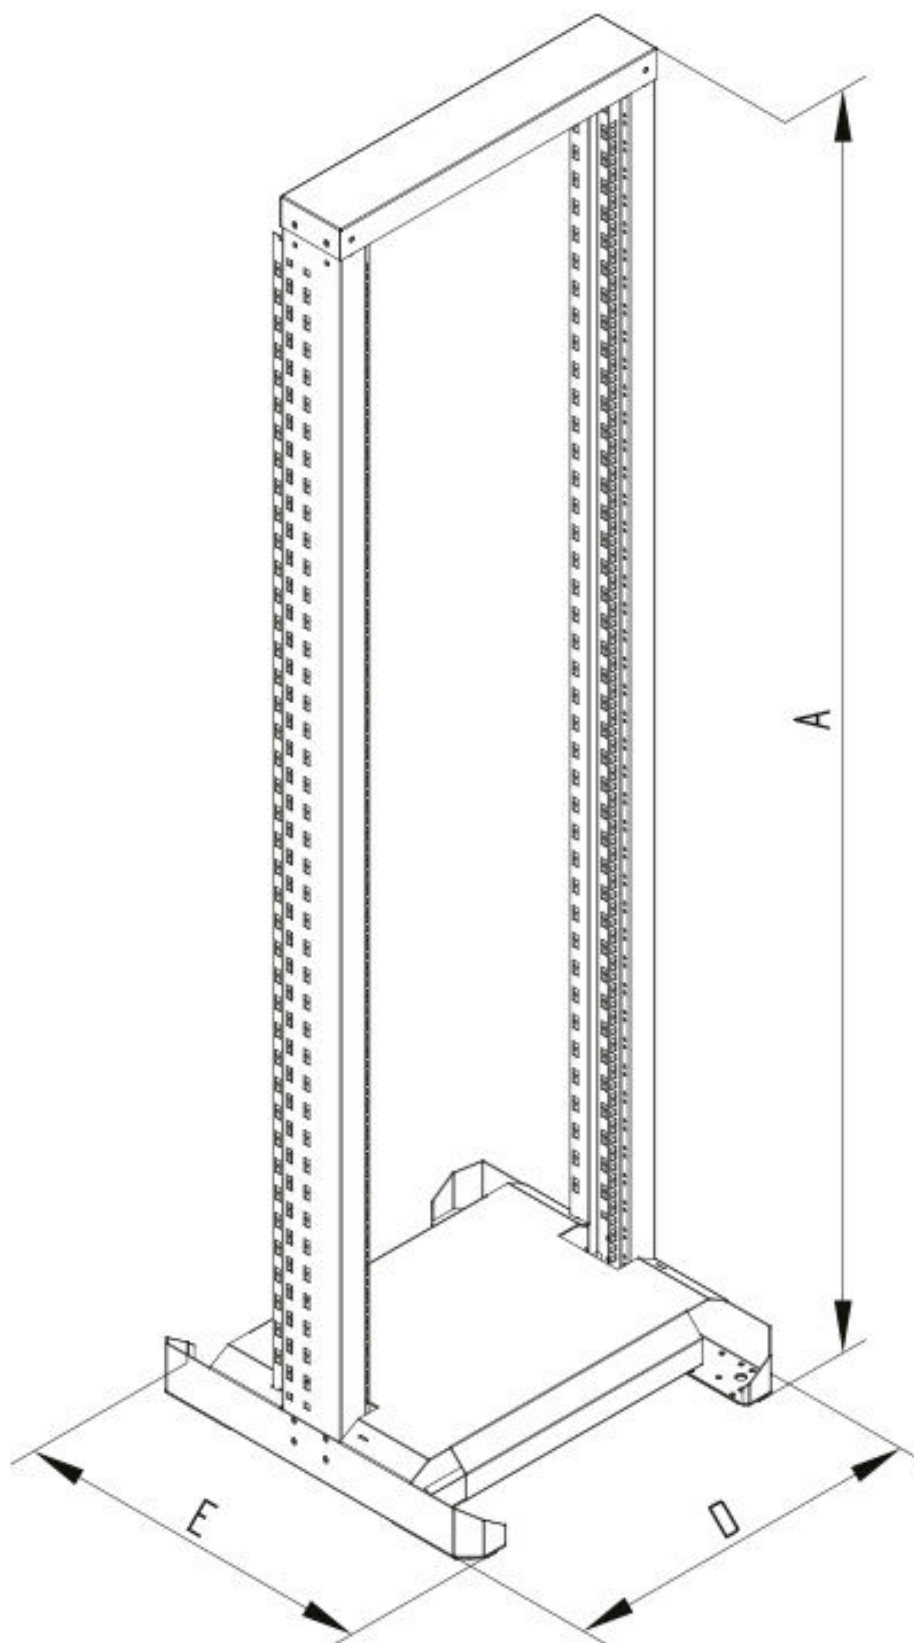

**Dimenzija: 19"SYSTEM RACK 27U/ 1-struki okvir/ 1340x600x700
(VxŠxD), 150kg**

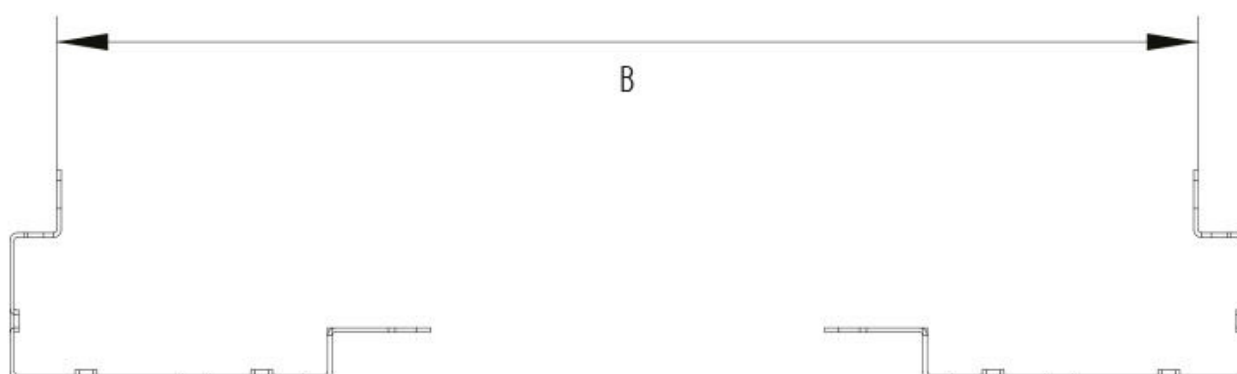


Tabela artikla

OPIS	Kat. broj
19"SYSTEM RACK 27U/ 1-struki okvir/ 1340x600x700 (VxŠxD), 150kg jednostruki profil, pocinkovan/galvanizovan	IU070127-A
Dodatni pribor	
19"Ranžirni panel, 5 metalnih prstena 80x40mm, 1 U, sivi metalni prstenovi, RAL7035 (svetlo siva)	DBC14805
19"Ranžirni panel, 5 PVC prstena 80x40mm, 1 U, sivi PVC prstenovi, RAL7035 (svetlo siva)	DBK14805
19"Polica fiksna, dubine 450mm, 1 HU, nosivosti 80kg, siva RAL7035 (svetlo siva), montaža u 4 tačke	DFS14845-C

Tabela artikla

OPIS	Kat. broj
Dodatni pribor	
19" Nap. panel 9xSCHUKO, 1HU, ALU, kabl 2m, sivi RAL7035 (svetlo siva)	IU070114
19" Nap. panel 7xSCHUKO+PNZ, 1.25HU, PVC, kabl 2m, sivi sa prenaponskom zaštitom T3 (klasa D), RAL7035 (svetlo siva)	IU070113
19" Nap. panel 9xSCHUKO+On/Off, 1HU, ALU, kabl 2m, crni sa On/Off prekidačem, RAL9005 (crna)	Q7070114-A
19" Nap. panel 7xSCHUKO+On/Off+PNZ, 1HU, ALU, kabl 2m, crni sa prenaponskom zaštitom T3 (klasa D), RAL9005 (crna)	Q7070113-A
Set za fiksiranje 19" opreme, M6 (vijak+kavez matica), 50kom 1 SET=50 komada	DSSRA050
Montazna ploča 19", 14HU, 622x482x1mm (VxŠxD), perforirana pocinkovani čelični lim, uključeni vijci i kavez matice	DMP1914
19" LED svetiljka sa prekidačem i senzorom pokreta, 230VAC montaža na 19" šinu (vijkom) ili pomoću magneta	DTLIGHT01
Switch 24xRJ45 10/100/1000, tihi, bez ventilatora, interni Metalno kućište, 19"	QLGSW2457