

Tehničke karakteristike artikla: IUKTI6301A

# Rashladna jed. 1500W, delimično ugradna, Serija DTI

400V, Dubina ugradnje=72mm, IP55, RAL 7035



## SCHRACK-Info

### General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)


### IUKTI6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Installation depth: 62mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


## Tehnički podaci

|                                |              |
|--------------------------------|--------------|
| Neto širina (mm)               | 418,00       |
| Neto visina (mm)               | 962,00       |
| Neto dubina (mm)               | 244,00       |
| Neto težina (kg)               | 45,00        |
| Min. temperatura okoline (°C)  | 15           |
| Maks. temperatura okoline (°C) | 55           |
| IP stepen zaštite              | IP55         |
| Klasa zaštite                  | I            |
| Nazivni napon                  | 400V-AC      |
| Tip                            | Klima uređaj |
| Rashladni učinak (W)           | 1500         |

## Kennlinien Kühleistung

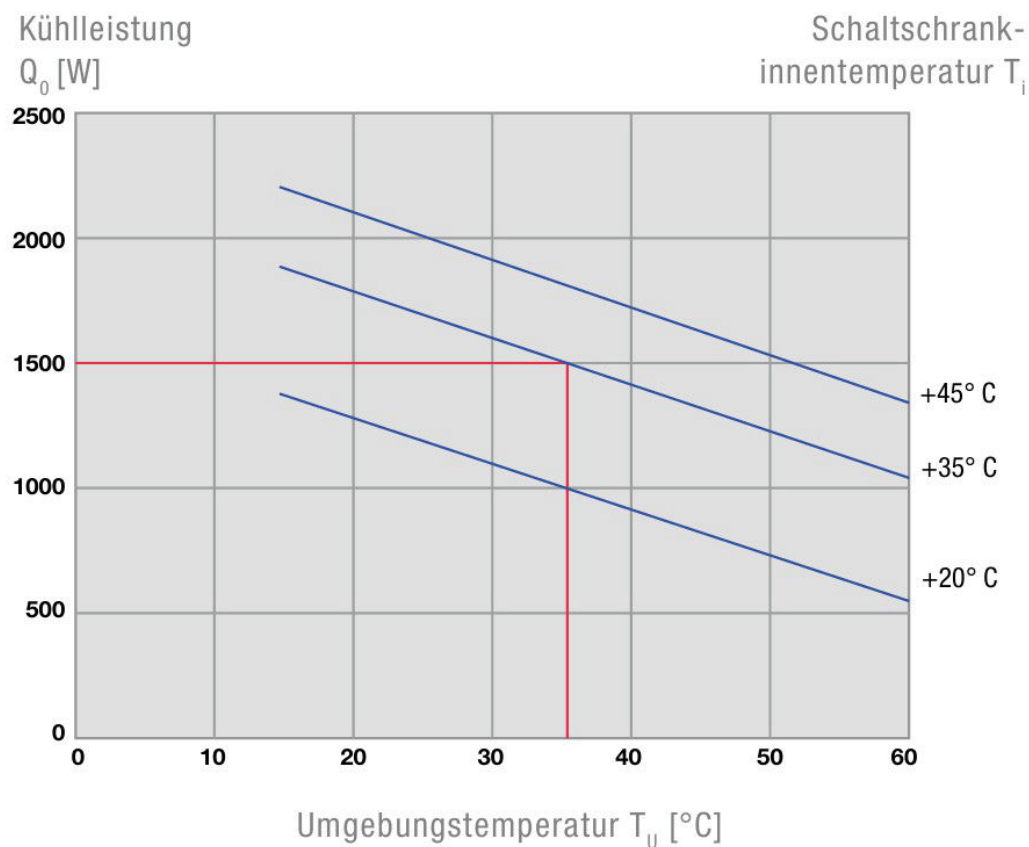

## Dimensions and Cutout IUKTI6201A

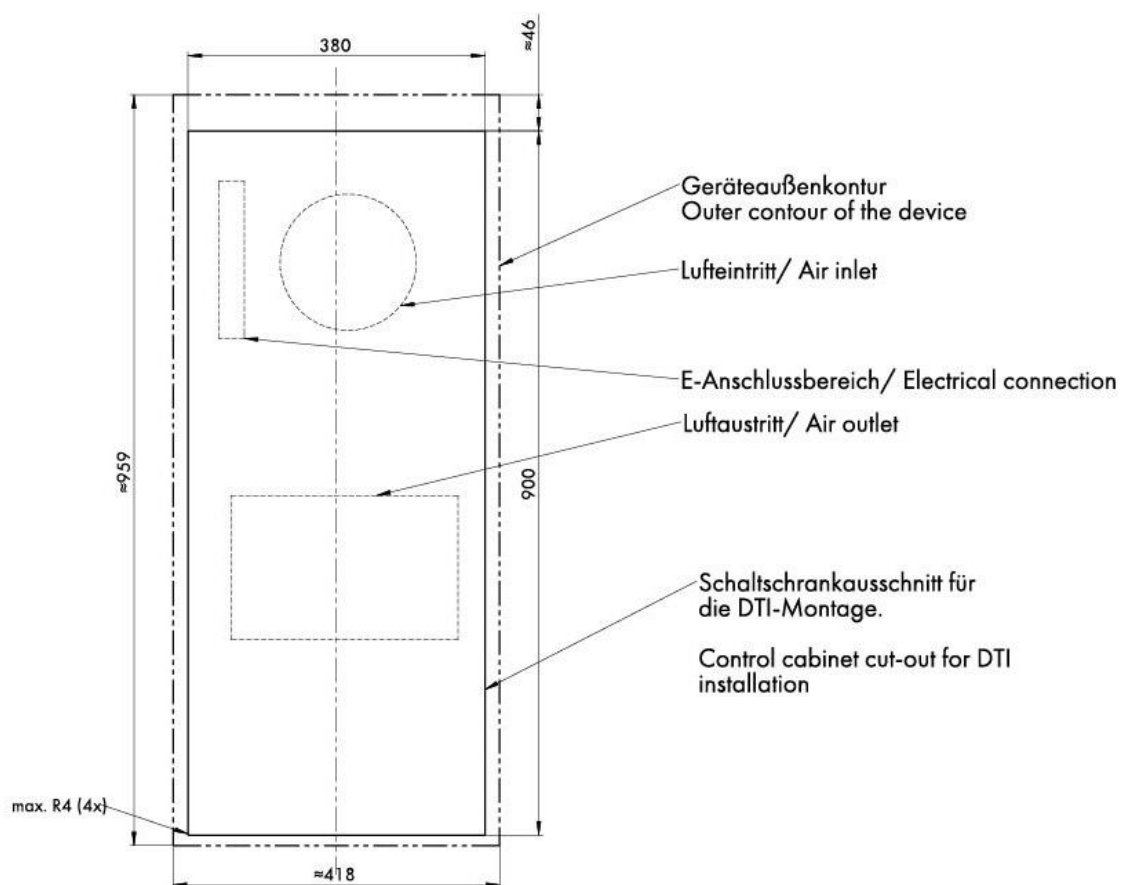

## OPIS

Kat. broj

Rashladna jed. 1500W, delimično ugradna, Serija DTI  
400V, Dubina ugradnje=72mm, IP55, RAL 7035

IUKTI6301A