

Tehničke karakteristike artikla: IUKTS6301A

Rashladna jed. 1500W, spoljna montaža, Serija DTS

400V, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings

Tehnički podaci


Neto širina (mm)

399,00


Tehnički podaci - nastavak

Neto visina (mm)	966,00
Neto dubina (mm)	244,00
Neto težina (kg)	45,00
Min. temperatura okoline (°C)	15
Maks. temperatura okoline (°C)	55
IP stepen zaštite	IP55
Klasa zaštite	I
Nazivni napon	400V-AC
Tip	Klima uređaj
Rashladni učinak (W)	1500

Kennlinien Kühlleistung

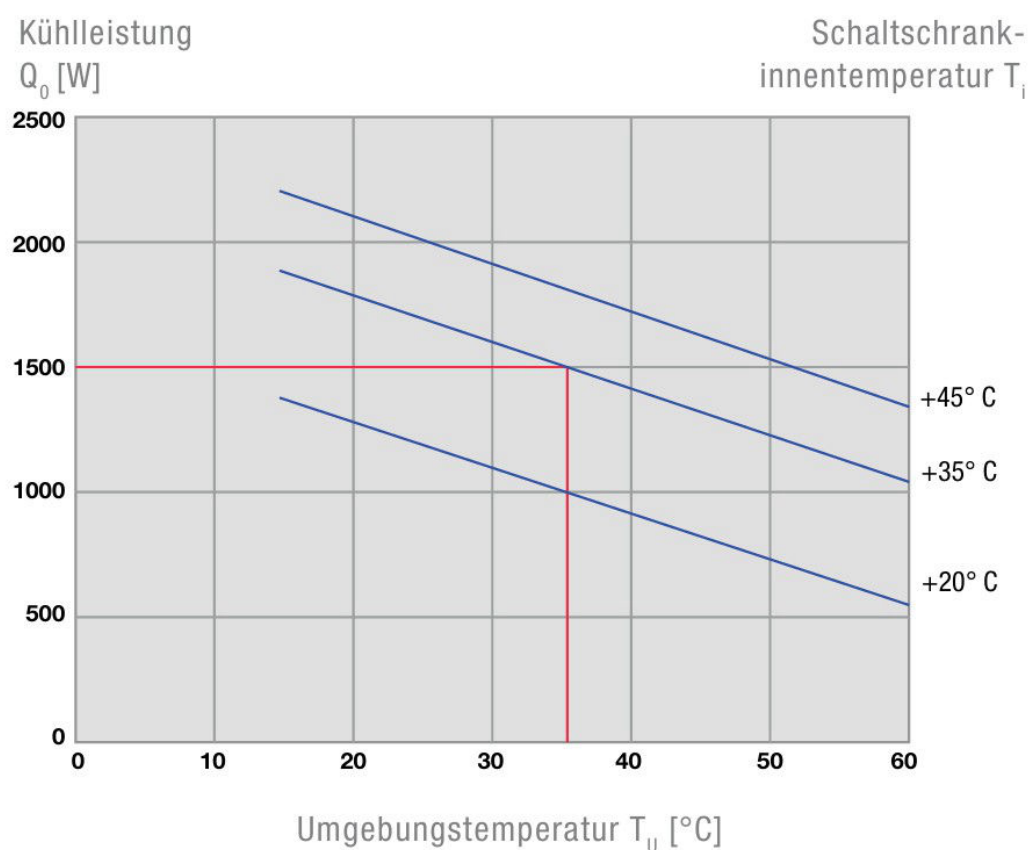

Dimensions and Cutout IUKTI6201 A

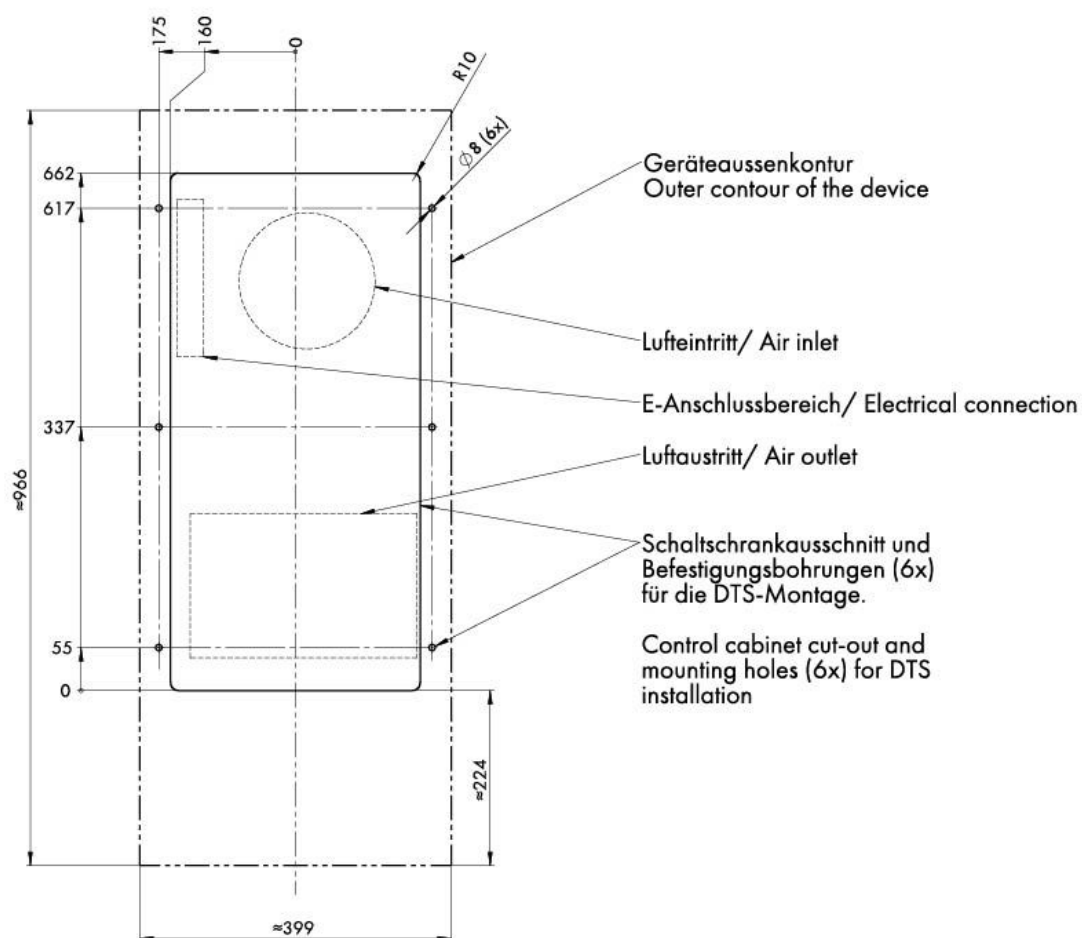

OPIS

Kat. broj

Rashladna jed. 1500W, spoljna montaža, Serija DTS
400V, IP55, RAL 7035

IUKTS6301A