

Tehničke karakteristike artikla: IUKTS6801-

Klima uređaj 4000W, spoljna montaža sa strane, serija DTS

400V, IP55, RAL 7035 , 1490 m3/h



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

Green Series Cooling Unit:

- Highest energy efficiency for significant energy savings and operating cost reduction
- Significantly less refrigerant used
- UL listed according to UL 60335 for long-term planning even after 2024
- Large distance between intake and exhaust vents, safe circulation within the electrical enclosure due to long passage of air, therefore hot spots are eliminated
- Exceptional serviceability

IUKTS6801:

- Cooling performance: 4000W
- Rated voltage: 400V
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP55: Towards the enclosure

- Degree of protection IP24: Towards the surroundings




Tehnički podaci

Neto širina (mm)	485,00
Neto visina (mm)	1.540,00
Neto dubina (mm)	372,00
Neto težina (kg)	94,00
Min. temperatura okoline (°C)	10
Maks. temperatura okoline (°C)	55
IP stepen zaštite	IP55
Klasa zaštite	I
Nazivni napon	400V-AC
Tip	Klima uređaj
Rashladni učinak (W)	4000


Lista fajlova: Klima uređaj 4000W, spoljna montaža sa strane, serija DTS

Daten	Einheit	IUKTS6801
Nennspannung +10%	Hz V	AC 50 / 60 400 / 460 3~
Kälteleistung nach EN 14511	L35/L35: L35/L50: W	4000 3150
Leistungsaufnahme	L35/L35: W	1800 / 2416
Einschaltstrom	L35/L35: A	16
Kälteleistungszahl	ϵ_{ke}	2,20
Luftvolumenstrom	intern m³/h	1490
freiblasend	extern m³/h	1490
Absicherung T	A	8
Anschlussart		Federzugklemme an beigefügtem Stecker
Umgebungstemperatur	°C (°F)	+10 bis +55 (+50 bis +131)
Regelbereich (einstellbar)	°C (°F)	+25 bis +45 (+77 bis +113)
Kältemittel	R134a g	1200
Kondensatabscheidung		integrierte Kondensatverdunstung mit Sicherheitsüberlauf
Schutzart	IP55	gegenüber dem Schaltschrank, bei bestimmungsgemäßem Einsatz
nach EN 60529	IP24	gegenüber der Umgebung, bei bestimmungsgemäßem Einsatz
Bauweise	Gehäuse	Stahlblech verzinkt
	Haube	elektrostatisch pulverbeschichtet (200 °C)
Abmessungen	[mm]	H=1540, B=485, T=372
Nettogewicht	[kg]	94

Cooling Capacity Performance Curves

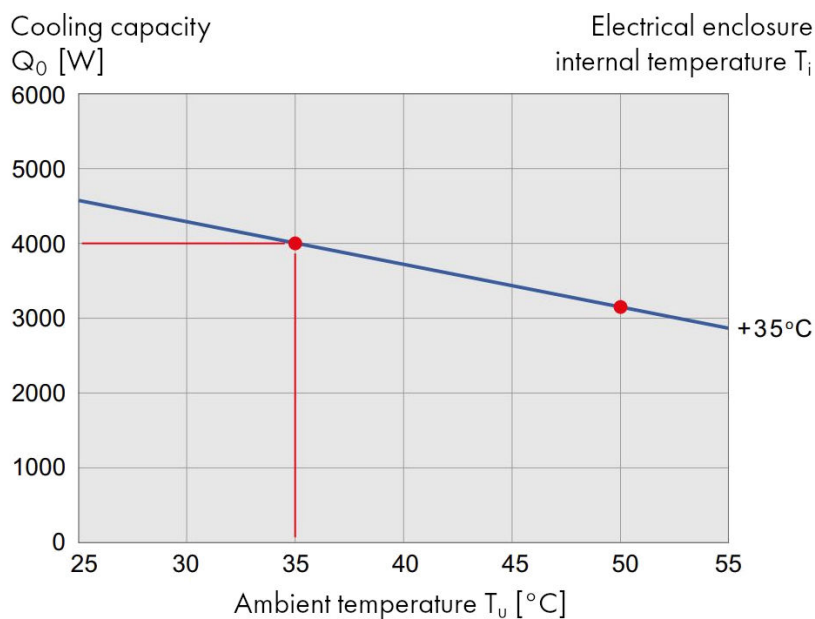

Dimensions and Cutout IUKTS6801

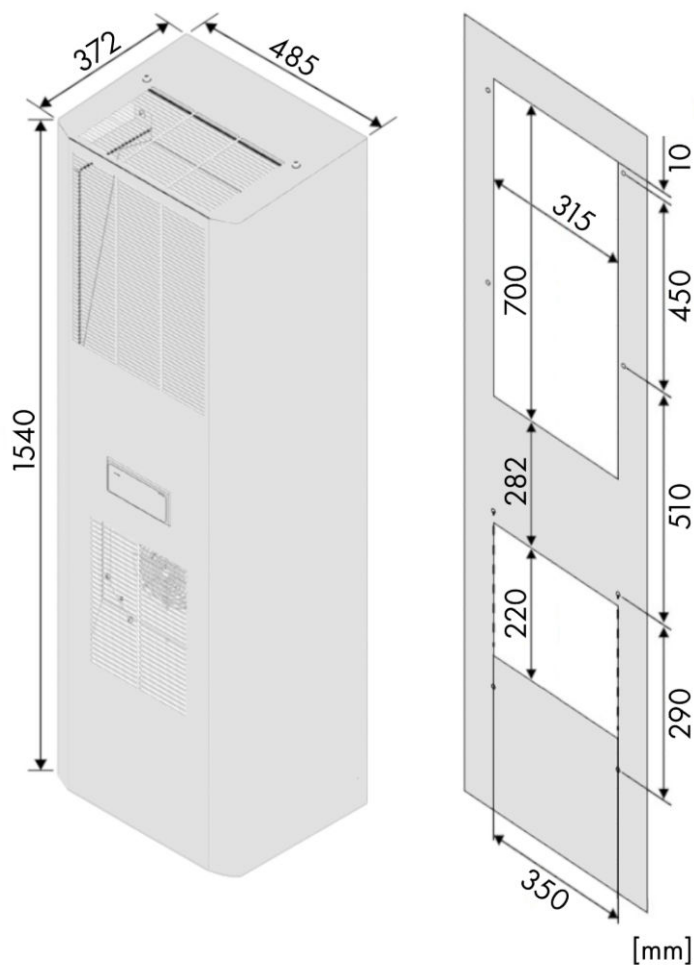

OPIS

Kat. broj

Klima uređaj 4000W, spoljna montaža sa strane, serija DTS
400V, IP55, RAL 7035 , 1490 m³/h

IUKTS6801