


Tehničke karakteristike artikla: LI1007236-

I-RING, nadgradna zidna svetiljka, 9.2W, 3000K, antracit

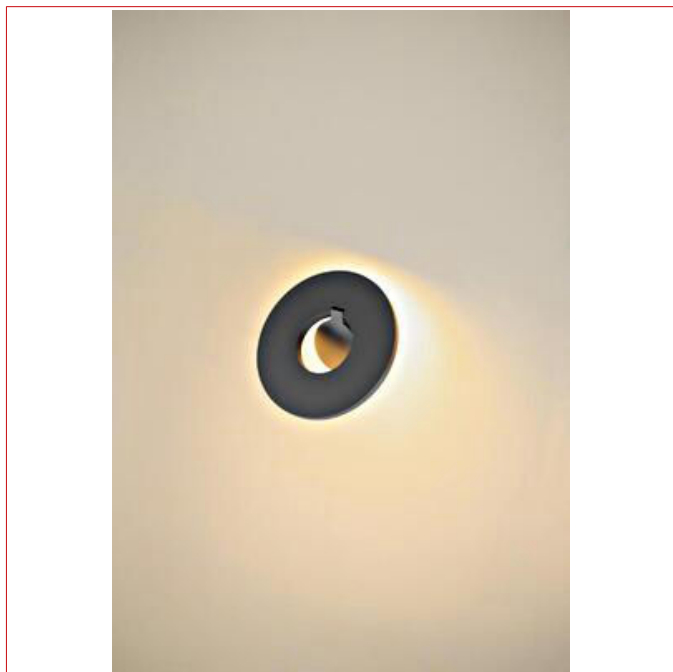

Detalji artikla

Indirect lighting in an organic ring shape summed up: the new I-RING wall light creates flexible and warm-white (3000K) accented lighting in upmarket outdoor areas thanks to its pivoting and rotatable lamp head. It also prevents light pollution as far as possible. The anthracite-coloured outdoor light is optimally protected thanks to its IP65 rating and features an exceptionally long lifespan of 50,000 hours. A well-rounded lighting experience.

Tehnički podaci

Svetlosni flux (lm)	670
Boja svetla	Toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥80
Životni vek	50000
Dimabilno	Ne
Klasa zaštite	I
Klasa energetske efikasnosti	D
IK stepen zaštite	IK05
Vrsta svetiljke (prema načinu primene)	Zidne nadgradne svetiljke
Sijalica uključena	Da
Sijalično grlo	LED štampana ploča

Tehnički podaci - nastavak

Snaga (W)	9,20
Nazivni napon AC (V)	100-240
Nazivna struja mA (mA)	350
Način montaže	Montaža na zid
Opis boje	antracit
Materijal	Aluminijum
Dužina (mm)	240
Visina (mm)	240
Prečnik (mm)	240
Dodatni pribor	LI228753--
DxŠxV mm	240x240x82
ØxV mm	240x82

Tabela artikla

OPIS	Kat. broj
I-RING, nadgradna zidna svetiljka, 9.2W, 3000K, antracit	LI1007236
Dodatni pribor	
Set vijaka M8, nerđajući čelik	LI228753