


Tehničke karakteristike artikla: LI158744--

I-VIDUAL LED Panel 40W, 4000K, M600, srebrnosivi 600xM600

LED panel for grid ceilings

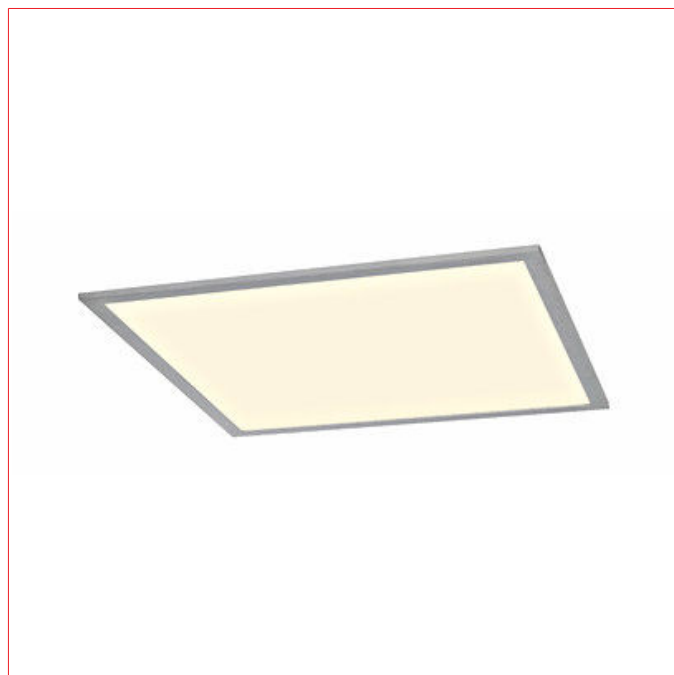

Tehnički podaci

Neto dužina (mm)	595,00
Neto širina (mm)	595,00
Neto visina (mm)	13,00
Neto težina (kg)	3,70
Montaža	Plafonsko ugradno
Boja	srebrno sivo
Materijal	Aluminijum Akril staklo
Proizvođač	03-SLV
Nazivna struja mA (mA)	1050
Temperatura boje (K)	4000
Indeks reprodukcije boje	80
Lumen (lm)	3650
Životni vek	30.000h
Klasa zaštite	III
Klasa energetske efikasnosti	A++ A+ A
Ugradna dubina (mm)	50

Tehnički podaci - nastavak

Sijalica uključena	da
DxŠxV mm	595x595x13

Dimenzija: I-VIDUAL LED Panel 40W, 4000K, M600, srebrnosivi 600xM600

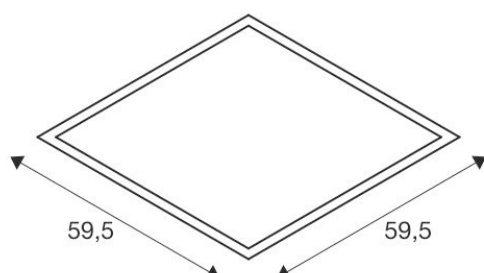


Tabela artikla

OPIS	Kat. broj
I-VIDUAL LED Panel 40W, 4000K, M600, srebrnosivi 600xM600	LI158744
LED panel for grid ceilings	
Dodatni pribor	
univerzalni ram za LED-Panel, 595x595mm, bela	LI158762
INSTALACIONI RAM, srebrno-siv, L/W 60.5/60.5 cm	LI158764
for I-VIDUAL LED panel	
Rozetna, 10,3cm x 22cm x 5,1cm, mat bela	LI158791
Set za viseću montažu za LED Panel	LI158799
TCI LED-Driver 50VA, DALI	LI464032
inkl. Cable relief	
LED-Driver, 40W, 1000mA,	LI464170
LED-Driver, 40W, 1000mA, dimabilni	LI464176