



Tehničke karakteristike artikla: LI29001133

Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,bez drajvera



Kriva prostiranja svetla



Tehnički podaci

Montaža	Zidno ugradno Plafonsko ugradno
Boja	belo
Materijal	Plastika Metal
Ugao emisije (°)	110
Nazivni napon DC (V)	22-24
Izvor svetla	SMD LED
Grlo	LED Platine
Snaga (W)	15
Sistemska efikasnost (lm/W)	83
Boja svetla	Neutralno bela

Tehnički podaci - nastavak

Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Lumen (lm)	1250
Životni vek (h)	50.000 / 70 / B10
Dimabilno	ne
IPStepen zaštite	IP20
Prečnik (mm)	190
ØxV mm	190x24

Dimenzija: Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,bez drajvera

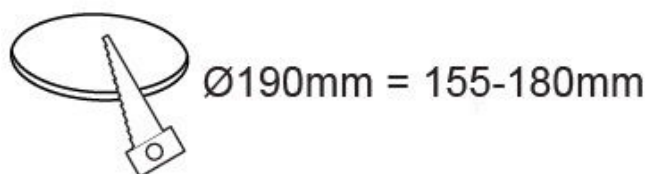
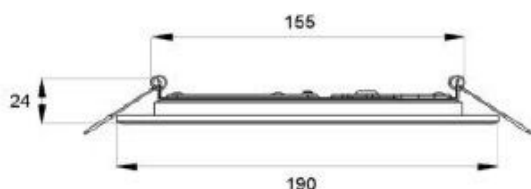


Tabela artikla

OPIS	Kat. broj
Led Flat Downlight 15W,840, 1250lm, 110°, 350mA,bez drajvera	LI29001133
Dodatni pribor	
Led Driver za 15W, 220-240V CC 350mA	LI29001137
Tridonic LCI 20W 350mA TEC SR	LI87500187
LED DRIVER 10W, 110-240V CC 350mA 2-43VDC DALI	LI29001166
LED DRIVER 15W, 110-240V CC 350mA 2-43VDC 1-10V & PUSH	LI29001164