



Tehničke karakteristike artikla: LI29001134

Led Flat Downlight 20W, 830, 1550lm, 110°, 700mA, bez drajvera



Kriva prostiranja svetla




Tehnički podaci

Montaža	Zidno ugradno Plafonsko ugradno
Boja	belo
Materijal	Plastika Metal
Ugao emisije (°)	110
Nazivni napon DC (V)	22-24
Izvor svetla	SMD LED
Grlo	LED Platine
Snaga (W)	20
Sistemska efikasnost (lm/W)	78
Boja svetla	toplo bela

Tehnički podaci - nastavak

Temperatura boje (K)	3000
Indeks reprodukcije boje	≥80
Lumen (lm)	1550
Životni vek (h)	50.000 / 70 / B10
Dimabilno	ne
IPStepen zaštite	IP20
Prečnik (mm)	235
ØxV mm	235x24

Dimenzija: Led Flat Downlight 20W,830, 1550lm, 110°, 700mA,bez drajvera

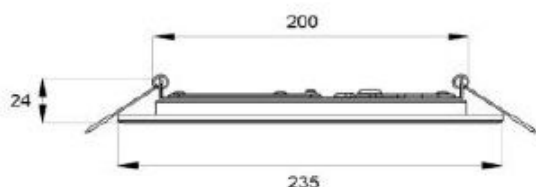

Ø235mm = 200-225mm

Tabela artikla

OPIS	Kat. broj
Led Flat Downlight 20W,830, 1550lm, 110°, 700mA,bez drajvera	LI29001134
Dodatni pribor	
Led Driver za 20W, 220-240V CC 700mA	LI29001138
Tridonic LCI 20W 700mA TEC SR	LI87500191
LED DRIVER 20W, 110-240V CC 700mA 2-28VDC DALI	LI29001167
LED DRIVER 20W, 110-240V CC 700mA 2-29VDC 1-10V & PUSH	LI29001165