



Tehničke karakteristike artikla: LI6PX1013J

PERLA 1x1W LED 4000°K 10°FRESNEL LINSE, ALU, bez drajvera



Tehnički podaci

Otvor (mm)	Ø35
Vrsta izvora	Plafonska svetiljka ugradna
Montaža	Plafonsko ugradno
Boja	Eloksirani aluminijum
Materijal	Aluminijum Staklo
Pokrov	Filter
Ugao emisije (°)	10
Pogonski uređaj	Bez LED drajvera
Nazivni napon AC (V)	230
Izvor svetla	LED
Grlo	LED Platine
Snaga (W)	1
Boja svetla	Neutralno bela
Temperatura boje (K)	4000

Tehnički podaci - nastavak

Lumen (lm)	93
Broj svetiljki	1
Klasa zaštite	III
Stepen zaštite	IP65
Ugradna dubina (mm)	36
Sijalica uključena	da
Prečnik (mm)	40
OTVOR mm	Ø35

Dimenzija: PERLA 1x1W LED 4000°K 10°FRESNEL LINSE, ALU, bez drajvera

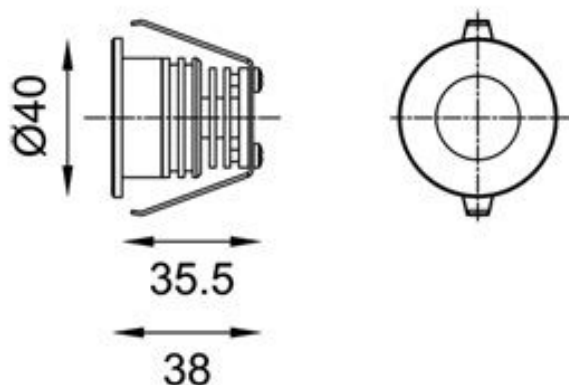


Tabela artikla

OPIS	Kat. broj
PERLA 1x1W LED 4000°K 10°FRESNEL LINSE, ALU, bez drajvera	L16PX1013J
Dodatni pribor	
LED Dajver 15W - 350mA - 100-240V za PERLA	L11L907AB0
LED Drajver 1W-IP20 350mA za MAX. 1 PERLA	L11L909AB0