



Tehničke karakteristike artikla: LID10116--

Luka LED 3W, 3000K, 190lm, 700mA, IP65, 30°, aluminijum **ECONOMY**



Tehnički podaci

Otvor (mm)	Ø37
Vrsta izvora	Downlight
Montaža	Plafonsko ugradno
Boja	Alu
Materijal	Aluminijum
Proizvođač	O6-One Light
Pogonski uređaj	Bez LED drajvera
Nazivna struja mA (mA)	700
Izvor svetla	LED
Grlo	LED Platine
Snaga (W)	3
Boja svetla	toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥80
Lumen (lm)	190

Tehnički podaci - nastavak

Broj svetiljki	1
Klasa zaštite	III
IP stepen zaštite	IP65
Klasa energetske efikasnosti	A
Ugradna dubina (mm)	60
Sijalica uključena	da
ØxV mm	46x46
OTVOR mm	Ø37

Dimenzija: Luka LED 3W, 3000K, 190lm, 700mA, IP65, 30°, aluminijum

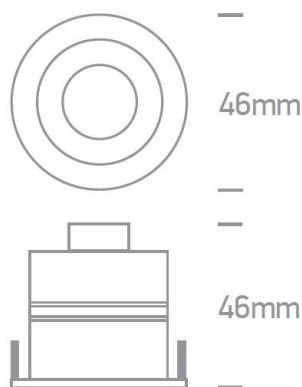


Tabela artikla

OPIS	Kat. broj
Luka LED 3W, 3000K, 190lm, 700mA, IP65, 30°, aluminijum	LID10116
Potreban pribor	
LED Drajver 1-6W LED, 700mA, IP20	LID13080