


Tehničke karakteristike artikla: LID13187--

Ina-A PAR16 Spot, GU10, 50W, IP20, pokretna hrom €ECONOMY

ugradna spot svetiljka



Tehnički podaci

Dimabilno	U zavisnosti od izvora svetla Da
Klasa zaštite	I
IP stepen zaštite	IP20
Vrsta svetiljke (prema načinu primene)	Downlight
Izvor svetla	Visokonaponska halogena reflektorska sijalica
Sijalica uključena	Ne
Broj svetiljki	1
Sijalično grlo	GU10
Snaga (W)	50
Nazivni napon AC (V)	230
Način montaže	Plafonska ugradna
Otvor (mm)	Ø82
Ugradna dubina (mm)	95

Tehnički podaci - nastavak

Opis boje	Hrom
Materijal	Aluminijum
Visina (mm)	30
Prečnik (mm)	94
Dodatni pribor	LID 17278--; LID 17279--; LID 17203--; LID 13226--; LID 14508--; LID 15671--; LID 16949--; LID 16223--; LID 13106--
Potreban pribor	LID 14882--; LID 13226--
ØxV mm	94x30
OTVOR mm	Ø82

Dimenzija: Ina-A PAR16 Spot, GU10, 50W, IP20, pokretna hrom

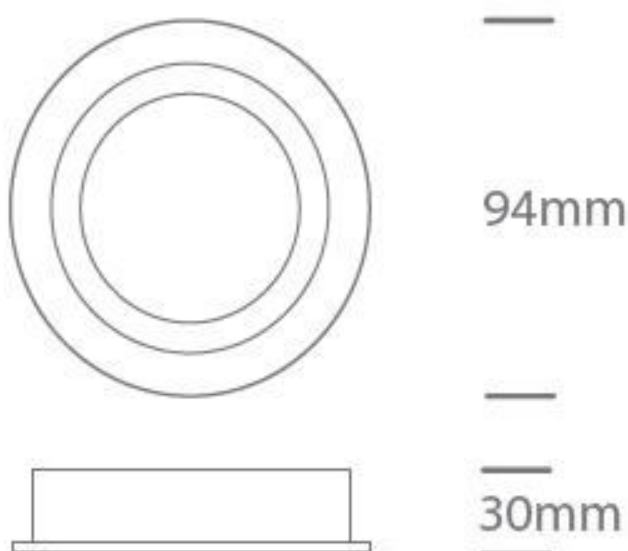


Tabela artikla

OPIS	Kat. broj
Ina-A PAR16 Spot, GU10, 50W, IP20, pokretna hrom ugradna spot svetiljka	LID13187
Potreban pribor	
7W MR16 GU10 500lm 3000K 36° 230V puni spektr CRI98	LID14882
COB LED GU10 sijalica, 6W, 3000K, 380lm, 60°, 230V	LID13226
Dodatni pribor	
LED 5W GU10 500lm 3000K CRI80 IP44 230V 38° Suitable for high ambient temperature enclosed fittings	LID17278
LED 5W GU10 500lm 3000K CRI80 IP44 230V 38° dimm Suitable for high ambient temperature enclosed luminaires	LID17279
LED 4W 300lm 3000K GU10 60° CRI90 TRIAC dimabilna 230V EM svetiljka, 3h	LID17203
COB LED GU10 sijalica, 6W, 3000K, 380lm, 60°, 230V	LID13226
LED MR16, 6W, GU10, 3000K, 500lm, 230V, 60° dimabilno	LID14508
LED sijalica GU10 MR16 6W 500lm 3000K 60° 230V crne boje Reflektor svetiljka	LID15671
Konektor 32A 2x3-port	LID16949
Emergency driver 3h sa MR16 LED modulom 3W 3 230V IP20 0	LID16223
Emergency GU10 LED 3-8,5W 3h Ovaj set takođe funkcioniše i sa GU10 LED svetiljkama pogodnim za 180V DC napajanje (Emergency)	LID13106