
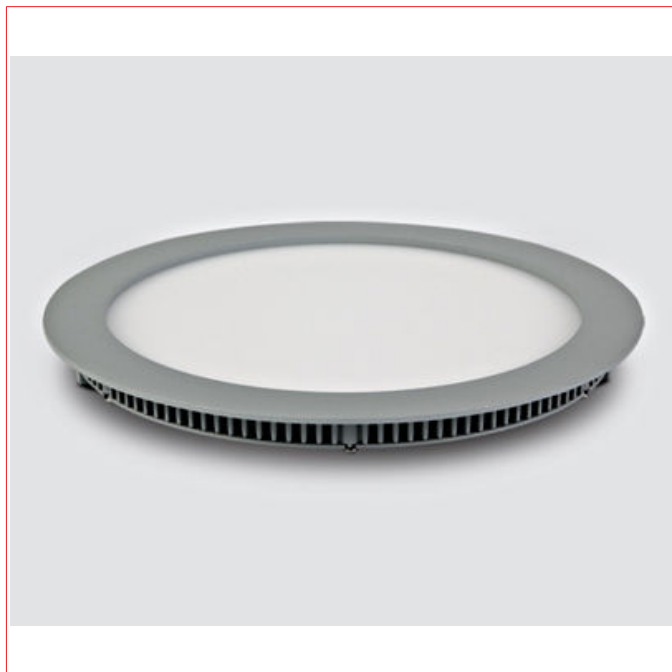


Tehničke karakteristike artikla: LID13242--

Sutil Round LED Panel, 20W, 4000K, 1330lm, IP44, siva

€ECONOMY

Tehnički podaci

Otvor (mm)	Ø285
Vrsta izvora	LAD panel
Montaža	Zidno ugradno Plafonsko ugradno
Boja	sivo
Materijal	Aluminijum
Pokrov	Opal
Ugao emisije (°)	120
Pogonski uređaj	LED drajver
Nazivni napon AC (V)	100-240
Ulazni napon AC (V)	100-240
Izlazni napon DC (V)	12-30
Izlazna struja (A)	1
Izvor svetla	SMD LED
Snaga (W)	30

Tehnički podaci - nastavak

Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Lumen (lm)	1997
Broj svetiljki	1
Životni vek (h)	30000
Klasa zaštite	II
Stepen zaštite	IP40
Klasa energetske efikasnosti	A
Ugradna dubina (mm)	40
Sijalica uključena	da
ØxV mm	300x20
OTVOR mm	Ø285

Dimenzija: Sutil Round LED Panel, 20W, 4000K, 1330lm, IP44, siva




Tabela artikla

OPIS	Kat. broj
Sutil Round LED Panel, 20W, 4000K, 1330lm, IP44, siva	LID13242