


Tehničke karakteristike artikla: LID13820--

Pako LED, 3x1W, 3000K, 200lm, 40°, 350/700mA, crna **ECONOMY**

Svetiljka

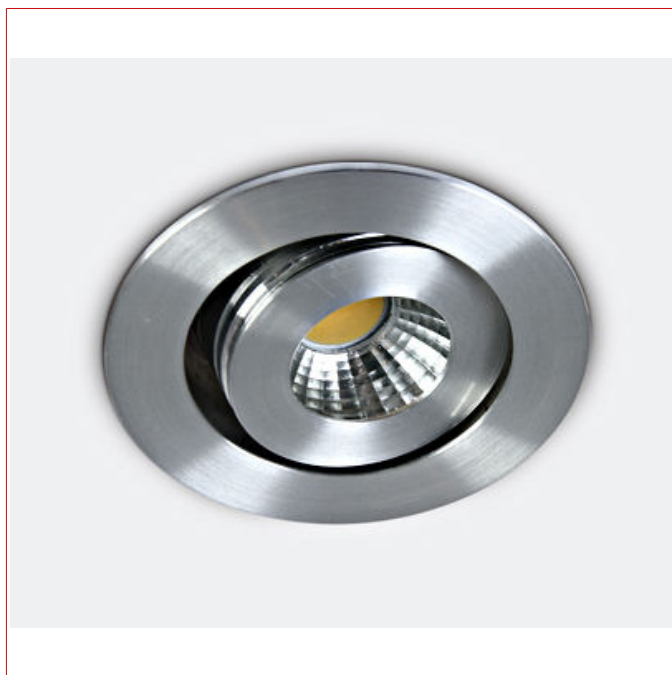

Detalji artikla

1W/2W COB LED adjustable recessed spot IP20. Requires 350mA/700mA driver. Complies with standard EN60598-1 and any other specific standards.



Tehnički podaci

Svetlosni flux (lm)	200
Boja svetla	Toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥90
Dimabilno	U zavisnosti od driver-a Da
Klasa zaštite	III
IP stepen zaštite	IP20
Vrsta svetiljke (prema načinu primene)	Plafonska svetiljka ugradna
Sijalica uključena	Da

Tehnički podaci - nastavak

Broj svetiljki	1
Sijalično grlo	LED štampana ploča
Ugao emisije (°)	40
Sistemska efikasnost (lm/W)	100
Snaga (W)	1;2
Upravljačka oprema (napajanje)	Mora se poručiti odvojeno
Nazivna struja mA (mA)	350 / 700
Ulazna struja (A)	0,35/0,7
Način montaže	Plafonska ugradna
Otvor (mm)	Ø 45
Ugradna dubina (mm)	60
Opis boje	crno
Materijal	Aluminijum
Visina (mm)	36
Prečnik (mm)	52
Dodatni pribor	LID 16949--
Potreban pribor	LID 13678--; LID 13677--; LID 16462--; LID 16463--;
ØxV mm	52x36
OTVOR mm	Ø 45

Dimenzija: Pako LED, 3x1W, 3000K, 200lm, 40°, 350/700mA, crna

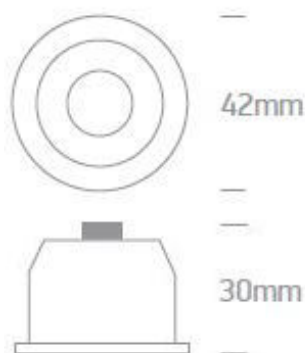


Tabela artikla

OPIS	Kat. broj
Pako LED, 3x1W, 3000K, 200lm, 40°, 350/700mA, crna Svetiljka	LID13820
Potreban pribor	
89004A, DRIVER 700mA 2-4W LED IP66 100-240V 23 DRIVERS	LID13678
89004, DRIVER 350mA 1-4W LED IP66 100-240V 23 DRIVERS	LID13677
LED driver 230V 2-4W 350mA dimabilna 23 DRIVERS	LID16462
LED driver 230V 2-4W 700mA dimabilna 23 DRIVERS	LID16463
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949