




Tehničke karakteristike artikla: LID14032--

LANO Pro LED Panel 48W, 3000K, 3600lm, UGR<19, M625, beli **€ECONOMY**

LED ugradni panel, potreban 1200mA driver



Kriva prostiranja svetla



Detalji artikla

UGR19 62x62 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications. Requires 1200mA LED driver. Complies with standard EN60598-1 and any other specific standards.



Tehnički podaci

Svetlosni flux (lm)	4000lm
---------------------	--------

Tehnički podaci - nastavak

Boja svetla	Toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥80
Dimabilno	U zavisnosti od driver-a Da
Klasa zaštite	III
IP stepen zaštite	IP20
Vrsta svetiljke (prema načinu primene)	LED panel
Sijalica uključena	Da
Broj svetiljki	1
Sijalično grlo	LED štampana ploča
Ugao emisije (°)	120
Snaga (W)	48
Upravljačka oprema (napajanje)	Mora se poručiti odvojeno
Nazivna struja mA (mA)	1200
Način montaže	Viseća Plafonska ugradna
Ugradna dubina (mm)	55
Opis boje	bela
Materijal	Aluminijum
Dužina (mm)	620
Širina (mm)	620
Visina (mm)	10
Dodatni pribor	LID 13401--; LID 15379--; LID 16949--
Potreban pribor	LID 13319--; LID 13754--; LID 16598--
DxŠxV mm	620x620x10
Vat (W)	48

Dimenzija: LANO Pro LED Panel 48W, 3000K, 3600lm, UGR<19, M625, beli

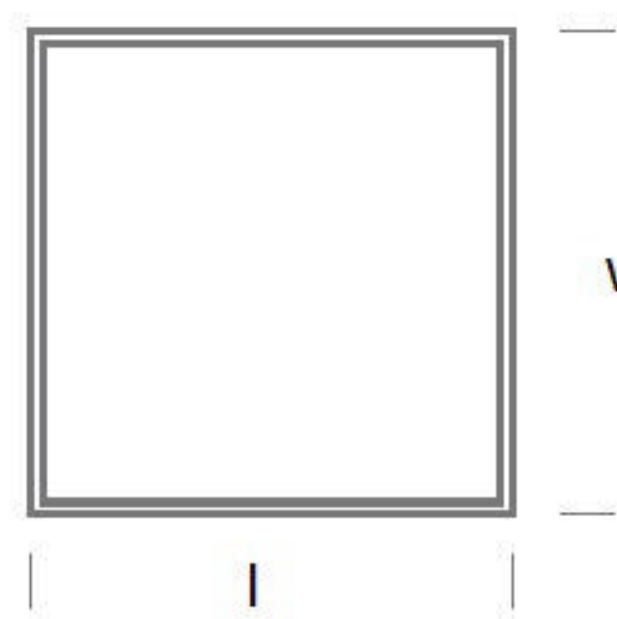


Tabela artikla

OPIS	Kat. broj
LANO Pro LED Panel 48W, 3000K, 3600lm, UGR<19, M625, beli LED ugradni panel, potreban 1200mA driver	LID14032
Potreban pribor	
LED Drajver, 1200mA, 48W 25 LAMPS	LID13319
LED Drajver za LANO, TRIAC dimovanje, 1200mA, 48W 23 DRIVERS	LID13754
50W Triac, DALI, Push to DIM & 1-10V LED driver IP20 230V; 23 DRIVERS	LID16598
Dodatni pribor	
Set suspenzija za LANO, dužina 1000mm (2 dela za Lano 1200 x 600)	LID13401
3-polna spojna kutija, IP20, Quick Fix Svetiljka	LID15379
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949