

Tehničke karakteristike artikla: LID15489--

Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m

potreban 24V DC driver



Detalji artikla

Slim Flexible LED light strip, with SMD2110 LEDs, 700LEDs/meter, 24W/meter. Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing. Can be cut every 1 cm (7-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci

Boja svetla	Toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥90
Dimabilno	U zavisnosti od driver-a Da
Klasa zaštite	III
IP stepen zaštite	IP20
EEC	F
Klasa energetske efikasnosti	F
Vrsta svetiljke (prema načinu primene)	LED traka
Sijalica uključena	Da
Sijalično grlo	LED štampana ploča

Tehnički podaci - nastavak

Sistemska efikasnost (lm/W)	85
Upravljačka oprema (napajanje)	Mora se poručiti odvojeno
Nazivni napon DC (V)	24
Ulazni napon DC (V)	24
Način montaže	Podna Plafonska nadgradna Montaža na zid
Dodatni pribor	LID16949--
Svetlosni fluks (lm/m)	2050

Dimenzija: Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m

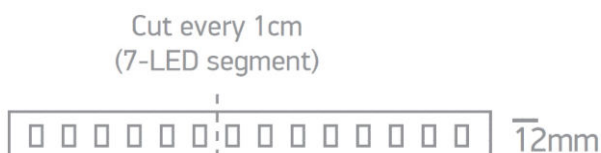


Tabela artikla

OPIS	Kat. broj
Marra LED traka 24W/m, 2050lm/m, 3000K, 24VDC, IP20, 5m potreban 24V DC driver	LID15489
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949