


Tehničke karakteristike artikla: LIELA35684

SARW LED raster 56W, 4000K, 5320lm, IP20, DALI, bela boja

Nadgradna svetiljka sa IK10 zaštitom



Kriva prostiranja svetla




Tehnički podaci

Neto dužina (mm)	1.255,00
Neto širina (mm)	355,00
Neto visina (mm)	85,00
Neto težina (kg)	6,00
Min. temperatura okoline (°C)	-20

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	50
Vrsta svetiljke (prema načinu primene)	Plafonska svetiljka nadgradna
Način montaže	Plafonska nadgradna
Opis boje	RAL 9003 (bela)
Materijal	metal
Upravljačka oprema (napajanje)	EVG DALI
Nazivni napon AC (V)	220-240
Nazivni napon DC (V)	176-280
Sijalično grlo	LED štampana ploča
Sistemska efikasnost (lm/W)	120
Snaga (W)	47
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Stabilnost boje MacAdam (sdcm)	3
Svetlosni flux (lm)	5625
Životni vek	50.000h / L90 / B50
Dimabilno	DALI
Klasa zaštite	I
IP stepen zaštite	IP20
IK stepen zaštite	IK10
Otporan na udarac lopte	Da
Sijalica uključena	Da
DxŠxV mm	1255x355x85

Dimenzija: SARW LED raster 56W, 4000K, 5320lm, IP20, DALI, bela boja

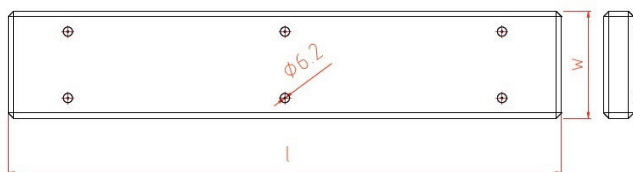

w=355mm
h=85mm
l=1255mm

Tabela artikla

OPIS	Kat. broj
SARW LED raster 56W, 4000K, 5320lm, IP20, DALI, bela boja Nadgradna svetiljka sa IK10 zaštitom	LIELA35684
Dodatni pribor	
Ugradni dimer sa DALI balastom, VISIO 50 Za kontrolu dugmetom	EHDALIDIM