

Tehničke karakteristike artikla: LIFLC5007C

Flyer ul. svet. asim. 25 LED 49W 5650lm 4000K, SABLE'100NOIR

With integrated ECG - Power of luminaire 59W - SC.II - IP66 - Complete with 1 m Cable



Tehnički podaci

Vrsta izvora	Ulična svetiljka Stubna svetiljka
Montaža	Montažno
Boja	Sable crna
Materijal	Aluminijum
Pogonski uređaj	LED drajver
Nazivni napon AC (V)	230
Izvor svetla	LED
Grlo	LED Platine
Snaga (W)	49
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Lumen (lm)	5560
Broj svetiljki	1

Tehnički podaci - nastavak

Klasa zaštite	II
Stepen zaštite	IP66
Sijalica uključena	da
DxŠxV mm	520x310x85

Dimenzija: Flyer ul. svet. asim. 25 LED 49W 5650lm 4000K, SABLE'100NOIR

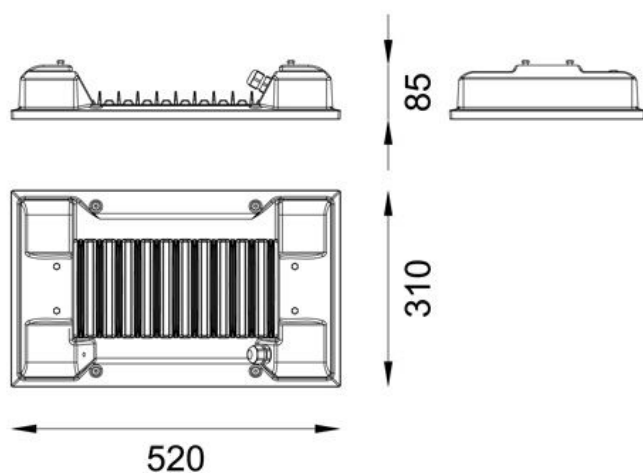


Tabela artikla

OPIS	Kat. broj
Flyer ul. svet. asim. 25 LED 49W 5650lm 4000K, SABLE'100NOIR	LIFLC5007C
With integrated ECG - Power of luminaire 59W - SC.II - IP66 - Complete with 1m Cable	
Dodatni pribor	
Montažni nosač za plafosku nadgradnu montažu za Arktur round high bay lighting	LIHBM380