

Tehničke karakteristike artikla: LIFLD0007C

Flyer ul. svet. asim. 30 LED 71W 6630lm 4000K, SABLE'100NOIR

With integrated ECG - Power of luminaire 71W - SC.II - IP66 - Complete with 1m Cable



Tehnički podaci

Vrsta izvora	Ulična svetiljka Stubna svetiljka
Montaža	Montažno
Boja	Sable crna
Materijal	Aluminijum
Pogonski uređaj	LED drajver
Nazivni napon AC (V)	230
Izvor svetla	LED
Grlo	LED Platine
Snaga (W)	71
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Lumen (lm)	6630
Broj svetiljki	1

Tehnički podaci - nastavak

Klasa zaštite	II
Stepen zaštite	IP66
Sijalica uključena	da
DxŠxV mm	520x310x85

Dimenzija: Flyer ul. svet. asim. 30 LED 71W 6630lm 4000K, SABLE'100NOIR

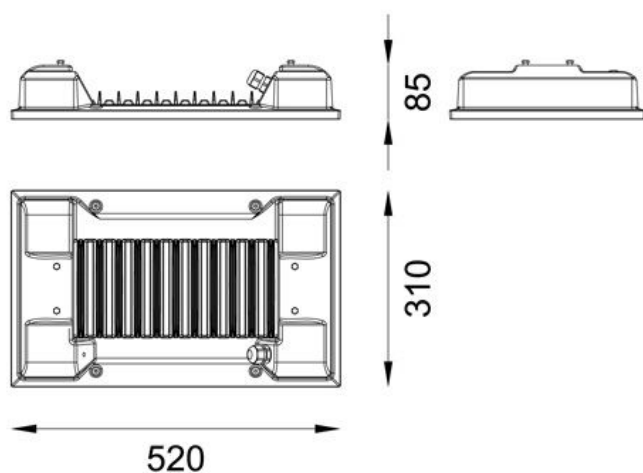


Tabela artikla

OPIS	Kat. broj
Flyer ul. svet. asim. 30 LED 71W 6630lm 4000K, SABLE'100NOIR	LIFLD0007C
With integrated ECG - Power of luminaire 71W - SC.II - IP66 - Complete with 1m Cable	