


Tehničke karakteristike artikla: LIG100030B

SEGON LED 18W ED 1900lm/4000K 3h M MAT IP44 70° bela GEN.2

ugradni downlighter



Kriva prostiranja svetla



Tehnički podaci

Neto visina (mm)	110,00
Neto prečnik (mm)	240,00
Neto težina (kg)	2,00
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	35

Tehnički podaci - nastavak

Otvor (mm)	Ø215
Vrsta svetiljke (prema načinu primene)	Plafonska svetiljka ugradna
Način montaže	Plafonska ugradna
Opis boje	bela
Materijal	Aluminijum
Pokrov	Mat
Proizvođač	01-Schrack-Trinity
Ugao emisije (°)	70
Faktor odsjaja (UGR)	<19
Upravljačka oprema (napajanje)	LED drajver
Nazivni napon AC (V)	220-240
Sijalično grlo	LED Platine
Sistemska efikasnost (lm/W)	95
Snaga (W)	20
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Svetlosni flux (lm)	1900
Nužna rasveta	Emergency kit 3h
Svetlosni fluks u emergency modu (lm)	300
Životni vek	50.000h / L80 / B10
Dimabilno	Ne
Klasa zaštite	I
IP stepen zaštite	IP44
IK stepen zaštite	IK07
Sijalica uključena	Da
ØxV mm	240x110
OTVOR mm	Ø215

Dimenzija: SEGON LED 18W ED 1900lm/4000K 3h M MAT IP44 70° bela GEN.2

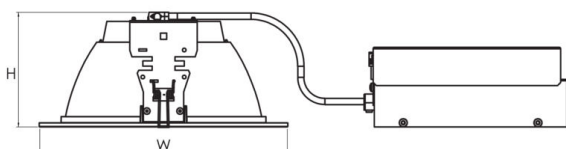


Tabela artikla

OPIS	Kat. broj
SEGON LED 18W ED 1900lm/4000K 3h M MAT IP44 70° bela GEN.2 ugradni downlighter	LIG100030B