


Tehničke karakteristike artikla: LIG6100137

SALENA LED panel 29W, 3050lm/4000K, raster

UGR <17, dim.600x324x65mm



Kriva prostiranja svetla



Tehnički podaci

Neto dužina (mm)	600,00
Neto širina (mm)	325,00
Neto visina (mm)	65,00
Neto težina (kg)	2,00
Maks. temperatura okoline (°C)	35
Vrsta izvora	Plafonska svetiljka nadgradna
Montaža	Plafonsko nadgradna
Boja	belo

Tehnički podaci - nastavak

Materijal	metal
Proizvođač	01-Schrack-Trinity
Faktor odsjaja (UGR)	<17
Pogonski uređaj	EVG
Nazivni napon AC (V)	220-240
Grlo	LED Platine
Snaga (W)	29
Sistemska efikasnost (lm/W)	112
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Lumen (lm)	3250
Životni vek	50.000h / L80 / B10
Dimabilno	ne
Klasa zaštite	I
IP stepen zaštite	IP20
Mehanička otpornost	IK04
Sijalica uključena	da
DxŠxV mm	600x325x65

Dimenzija: SALENA LED panel 29W, 3050lm/4000K, raster

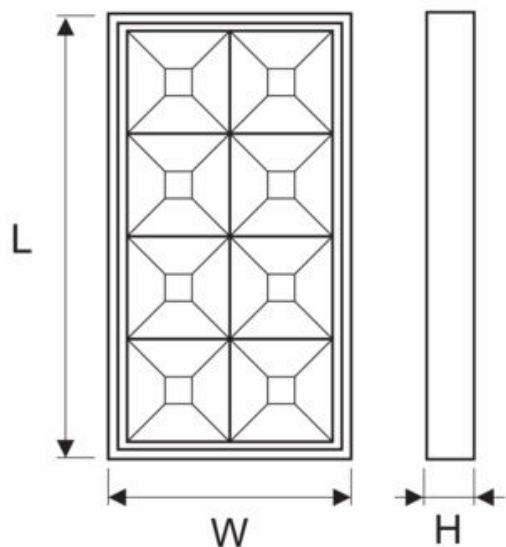


Tabela artikla

OPIS	Kat. broj
SALENA LED panel 29W, 3050lm/4000K, raster UGR <17, dim.600x324x65mm	LIG6100137