


Tehničke karakteristike artikla: LIG9100060

Primolux nadgradna svetiljka 51 W 5900lm/ 4000K IP44 1535mm



Kriva prostiranja svetla




Tehnički podaci

Neto dužina (mm)	1.535,00
Neto širina (mm)	95,00
Neto visina (mm)	72,00
Neto težina (kg)	3,10
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	30

Tehnički podaci - nastavak

Vrsta svetiljke (prema načinu primene)	Plafonska svetiljka nadgradna
Način montaže	Plafonska nadgradna Montaža na zid
Opis boje	bela
Materijal	PMMA opal metal
Upravljačka oprema (napajanje)	EVG
Nazivni napon AC (V)	220-240
Sijalično grlo	LED štampana ploča
Sistemska efikasnost (lm/W)	138
Snaga (W)	52
Boja svetla	Neutralno bela
Temperatura boje (K)	4000
Indeks reprodukcije boje	≥80
Svetlosni flux (lm)	7750
Životni vek	60.000h / L80 / B10
Dimabilno	Ne
Klasa zaštite	I
IP stepen zaštite	IP44
IK stepen zaštite	IK05
Sijalica uključena	Da
Broj svetiljki po osiguraču B10	16
Broj svetiljki po osiguraču B16	26

Dimenzija: Primolux nadgradna svetiljka 51W 5900lm/4000K IP44 1535mm

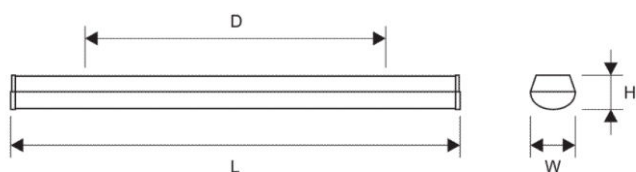

OPIS	Kat. broj
Primolux nadgradna svetiljka 51W 5900lm/4000K IP44 1535mm	LIG9100060