


Tehničke karakteristike artikla: LIGL052061

RUBINO ulična svetiljka 57W 6200lm/5700K EVG IP66 O7

ulična svjetiljka



Kriva prostiranja svetla



Tehnički podaci

Neto dužina (mm)	550,00
Neto širina (mm)	250,00
Neto visina (mm)	100,00
Neto težina (kg)	6,80
Min. temperatura okoline (°C)	-40

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	55
Surge protection (kV)	6
Opis boje	sivo
Proizvođač	01-Schrack-Trinity
Upravljačka oprema (napajanje)	EVG
Sijalično grlo	LED Platine
Sistemska efikasnost (lm/W)	111
Snaga (W)	80
Boja svetla	Hladno bela
Temperatura boje (K)	5700
Indeks reprodukcije boje	≥70
Svetlosni flux (lm)	10200
Životni vek	100.000h / L80 / B10
IP stepen zaštite	IP66
Pigtail (mm)	60
DxŠxV mm	550x250x100

Dimenzija: RUBINO ulična svetiljka 57W 6200lm/5700K EVG IP66 O7

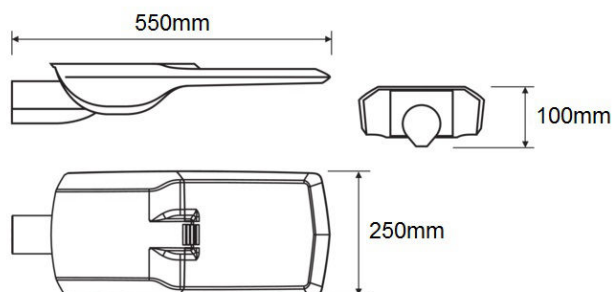


Tabela artikla

OPIS	Kat. broj
RUBINO ulična svetiljka 57W 6200lm/5700K EVG IP66 O7 ulična svjetiljka	LIGL052061
Dodatni pribor	
RUBINIO LED 60 to 76 mm, siva	LIG1517817
RUBINIO LED zidni nosač 60 mm, siva	LIG1517818