



Tehničke karakteristike artikla: LIHGWA17--

Mika zidna svetiljka UP 12, 5W 800lm 3000K ECG IP54 antracit

LED zidna svetiljka za spoljašnju upotrebu




Kriva prostiranja svetla





Tehnički podaci

Neto dužina (mm)	139,00
Neto širina (mm)	116,00
Neto visina (mm)	160,00
Neto težina (kg)	0,83
Vrsta svetiljke (prema načinu primene)	zidna svetiljka
Opis boje	RAL 7016 (antracit)
Materijal	Aluminijum PMMA
Ugao emisije (°)	110
Nazivni napon AC (V)	220-240
Temperaturni okvir - Operativni (°C)	-20 to +40
Sijalično grlo	LED Platine
Sistemska efikasnost (lm/W)	64
Snaga (W)	12,50
Boja svetla	Toplo bela
Temperatura boje (K)	3000
Indeks reprodukcije boje	≥80
Svetlosni flux (lm)	800
Životni vek	25.000h
Dimabilno	Ne
Klasa zaštite	I
IP stepen zaštite	IP54
IK stepen zaštite	IK07
Sijalica uključena	Da
DxŠxV mm	139x116x160
Broj svetiljki po osiguraču B10	28
Broj svetiljki po osiguraču B13	37
Broj svetiljki po osiguraču B16	46
Broj svetiljki po osiguraču C10	43
Broj svetiljki po osiguraču C16	69

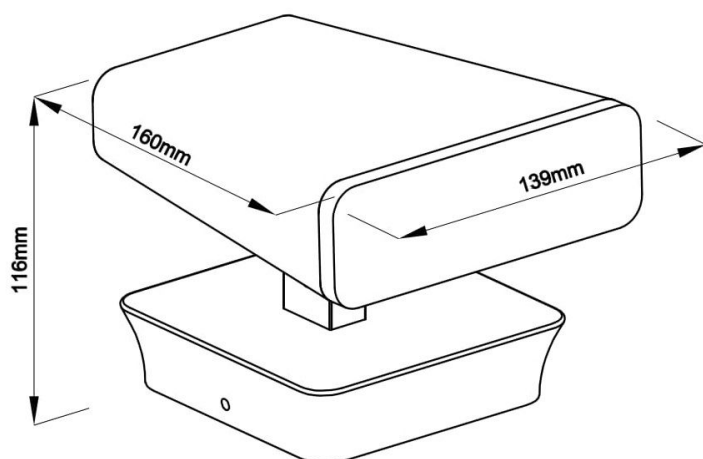LIHGWA17**OPIS**

Mika zidna svetiljka UP 12,5W 800lm 3000K ECG IP54 antracit
LED zidna svetiljka za spoljašnju upotrebu

Kat. broj

LIHGWA17