

Tehničke karakteristike artikla: LILE0128--

Elegance Shine 24/ 18/ 10W 3000K/ 4000K Ra80 IP65 opal, white

Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm



Tehnički podaci

Neto visina (mm)	90,00
Neto prečnik (mm)	300,00
Neto težina (kg)	2,80
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40
Vrsta svetiljke (prema načinu primene)	Surface-mounted luminaire
Način montaže	Downlight Zidna svetiljka
Opis boje	bela
Materijal	Akril staklo Akril
Pokrov	Opal
Ugao emisije (°)	120
Nazivni napon AC (V)	220-240

Tehnički podaci - nastavak

Nazivna struja mA (mA)	100
	50
	75
Sistemska efikasnost (lm/W)	125
	128
	130
Snaga (W)	24
	18
	10
Boja svetla	Neutralno bela
	Toplo bela
Temperatura boje (K)	4000
	3000
Indeks reprodukcije boje	80
Svetlosni flux (lm)	1300
	2300
	3000
Dimabilno	da, opciono sa dimabilnim drajverom
Klasa zaštite	I
IP stepen zaštite	IP65
IK stepen zaštite	IK10
Prečnik (mm)	300
ØxV mm	300x90

Dimenzija: Elegance Shine 24/ 18/ 10W 3000K/ 4000K Ra80 IP65 opal, white

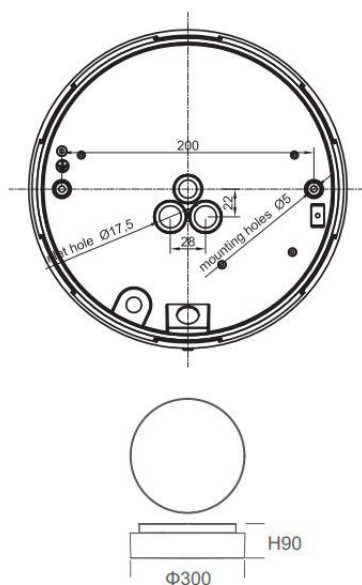


Tabela artikla

OPIS	Kat. broj
Elegance Shine 24/18/10W 3000K/4000K Ra80 IP65 opal, white Wall, ceiling light with adjustable wattage and light colour, Lumen 24W = 3000lm / 18W = 2300lm / 10W = 1300lm	LILE0128
Dodatni pribor	
	DALI-M